




## ASSEMBLY INSTRUCTION MODEL# ADL-506-AG-CL

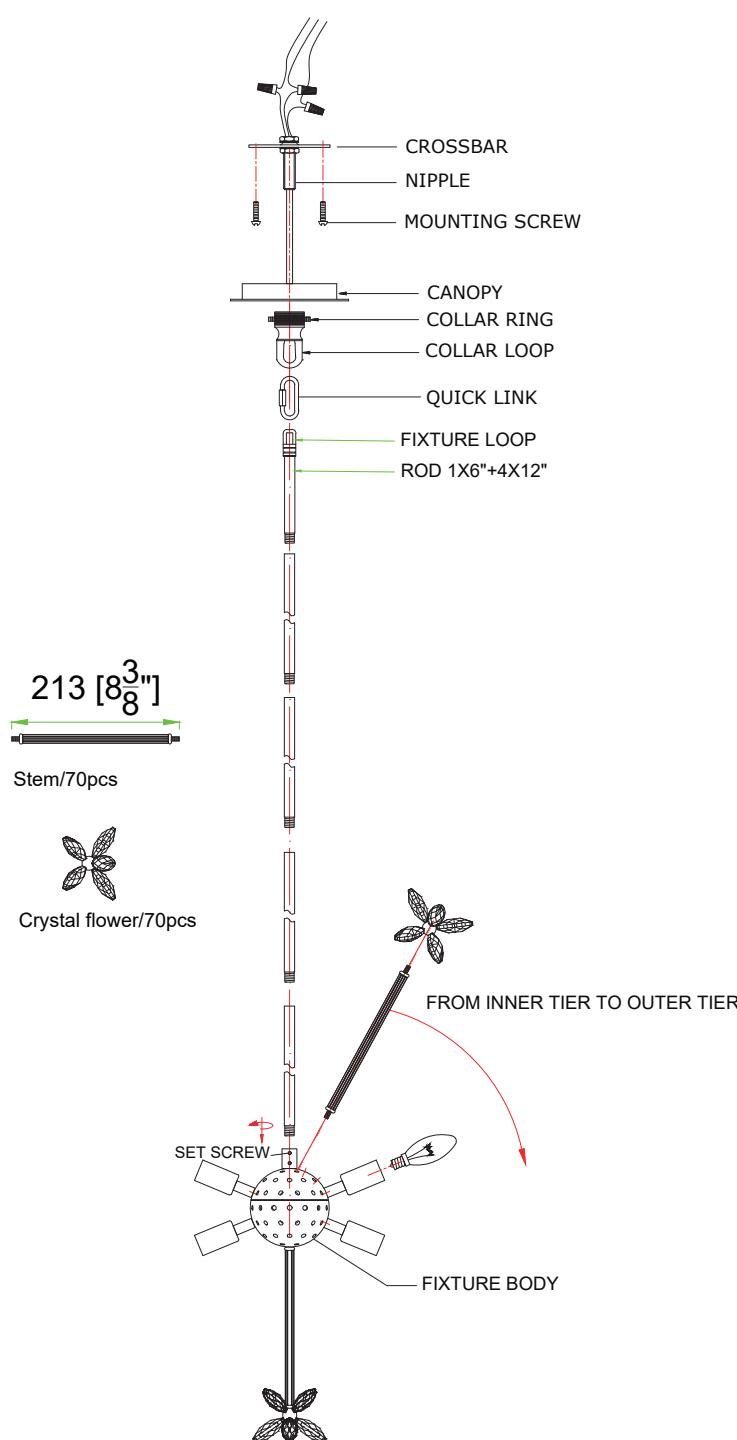

Top View

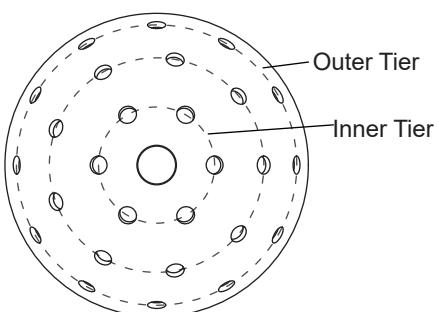

Bottom View

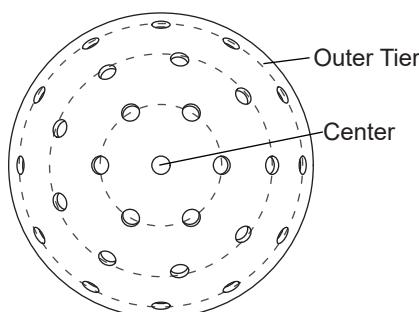

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 6 Candelabra Base Bulb  
40 Watts Recommended 60 Watts Max.  
USE LED BULBS FOR EXTENDED USE  
This fixture is Dry rated


### How to install

1. Decide the preferred hanging height and choose the correct length of rods needed. Feed the fixture wire through the rod and screw it onto the coupler. (Loosen the set screw if the rods can not be screwed all the way down).
2. Install the mounting bar onto the outlet box using the two mounting screws.
3. Slip the collar ring and canopy down over the end of the rod. Raise the fixture up to the ceiling, then connect the fixture loop to the collar loop with a quick link.
4. Feed the wires carefully through collar loop and nipple. Connect the electrical wires as shown.
5. Carefully raise the canopy up to the ceiling and secure with the collar a ring.
6. Install the bulbs into socket.
7. Starting from the center and inner tier, screw the stem and crystal flower into the fixture body as shown on the diagram. Do not over tighten to avoid breaking the glass.


### Glass Sets

1.70 sets Stem(metal stem L8 3/8+glass stem 7 1/2")  
2.70 pcs Crystal flower

**WARNING:** This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

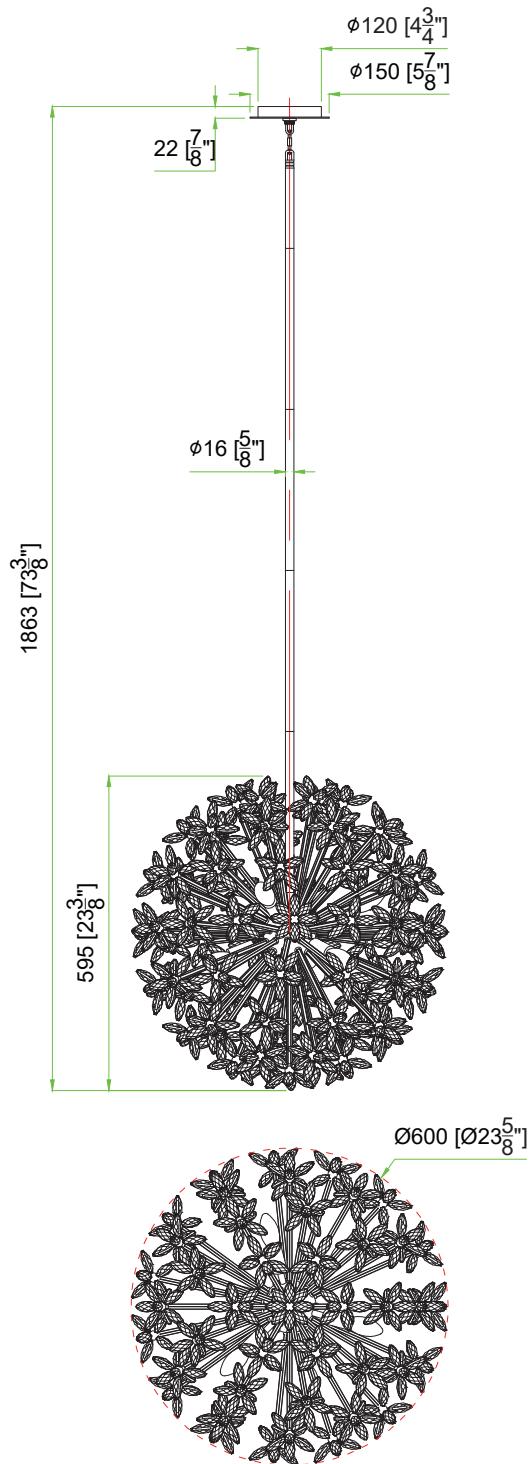

## ASSEMBLY INSTRUCTION MODEL# ADL-506-AG-CL

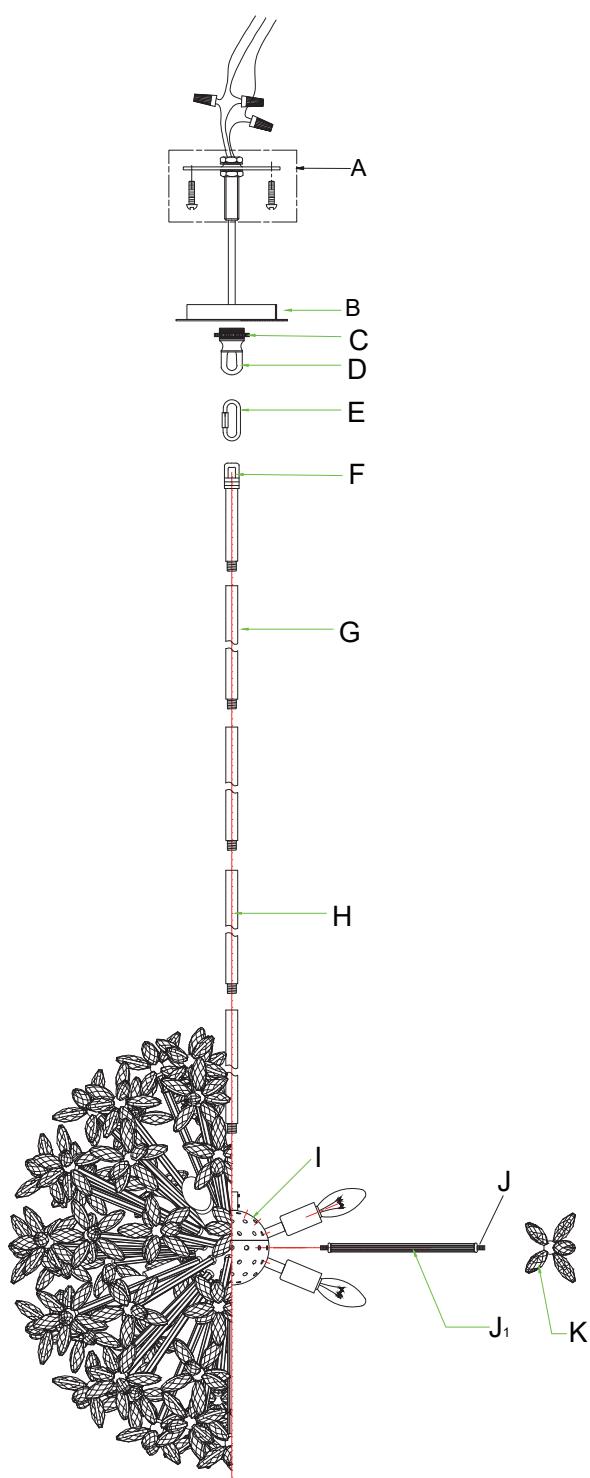

### Part Number

#### Part Numbers

A. Mounting hardware includes

(1)-Threaded nipple  
(1)-Crossbar  
(2)-Mounting screws  
(1)-Ground screw  
(2)-Hex nut

B. (1)-Canopy,D5.8"  
(XBN506AGCAN5.8IN)

C. (1)-Collar ring

D. (1)-Collar loop

E. (2)-Quick link

F. (1)-Fixture loop

G. (4)-Rod,D16xL12"  
(XBN506AGROD12IN)

H. (1)-Rod,D16xL6"  
(XBN506AGROD6IN)

I. (1)-Frame

J. (70)-Metal stem,L8 3/8"  
(XBN506AGMROD8.4IN)

J<sub>1</sub>. (70)-Glass stem,L7 1/2"

(XBN506GLROD7.5IN)

K. (70)-Crystal flower

(XBN500AGCRYB)