


# AJ GARDEN BOLLARD

AJG-B / LONG / LED 4000K / Black texture / - / Spike w/o power supply / - / 10000163688

This outdoor lamp emits a pleasant, fully shaded, downwardly directed, glare-free light. It is available in two different heights and has a fixed head. The inside of the shade is painted white to ensure a soft and pleasant reflection of light. The shape of the shade provides superior lighting, allowing an optimal view of its surroundings. The garden bollard can be fitted with three different installation types – namely a base plate, a spike, or an anchor.



## Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



## Product info

### Information

The adapter is positioned externally from the fixture and can run up to 6 bollards. Maximum distance to last bollard is 30m. Spike: Plug and play. Let the enclosed cables run over the ground. Uses standard cables and connectors which are supplied. Anchor/Base: Requires certified electrician. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation. LED replacement kit available. Replacement of the built-in LED requires a certified electrician.

### Mounting

The bollard requires a separate, 24V DC power supply. Choice of 3 different mounting types. Spike mounted bollard: For use in soil or gravel; includes weather-proof cables and connectors for above-ground runs. Plug and play. Anchor mounted bollard: for casting in new concrete pad. Base mounted bollard: Includes baseplate for anchoring to decks and floors. Anchor or Base mounted bollards: installation determined by certified electrician with below ground cabling and conduit.

### Finish

Outside: Black textured surface, powder-coated. Inside: White, wet-painted.

### Materials

Head: Cast aluminum. Stem and base plate: Stainless steel. Spike: Cast aluminum with ABS housing. Anchor: Steel. Diffuser: Injection-molded opal PC.

### Compliance

Ingress protection: IP 65. IK06

### Light source

LED 4000K

Lumen: 454


### Information

The adapter is positioned externally from the fixture and can run up to 6 bollards. Maximum distance to last bollard is 30m.

Spike: Plug and play. Let the enclosed cables run over the ground. Uses standard cables and connectors which are supplied.

Anchor/Base: Requires certified electrician. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation.

LED replacement kit available. Replacement of the built-in LED requires a certified electrician.

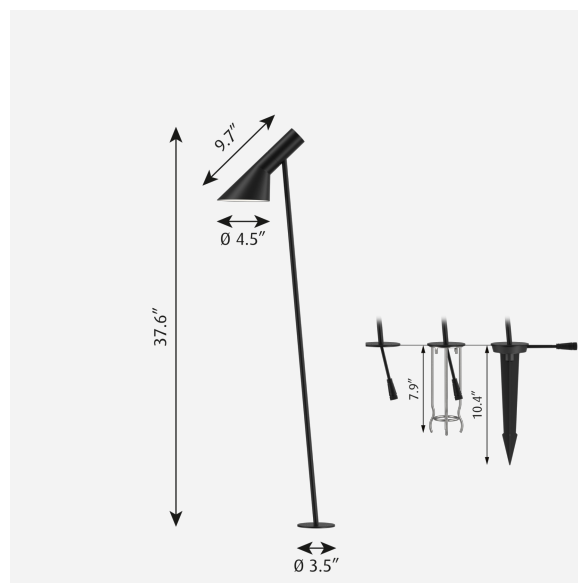

## Related products




AJ Royal



AJ Mini Table




AJ Oxford Table Lamp



AJ Floor



AJ Table



AJ Wall



AJ 50 Wall

## Spare parts & accessories

Product	Variant number
T-Connector for Spike-Mount Garden Bollards	5747405303
Extension Cable 16.4 Ft For Spike-Mount Garden Bollards	5747405316
Power Supply for Base & Anchor Mount, 24VDC 100W 120-277V Input	10000158964
Power Supply with Cords for Spike Mount, 24VDC 100W 120V Input	10000158965
AJ GARDEN ANCHOR + SCREWS/WASHERS	5747406195
AJ GARDEN SPIKE+BASE BLK + SCREWS	5747406205
AJ GARDEN SPARE BASE SCREWS (4 pcs)	5747406218
AJ GARDEN DIFFUSER KIT	5747407055

## Data specifications

Colour	<b>Black texture</b>	Length	-
Width	-	Height	-
IP class	-	IK class	-
Class	-	Net Weight	<b>0.0</b>
Wind Load (ft2)	-	Standby (W)	-
Power Factor (P = 100 % / P = 50 %)	-	Inrush Current	-
Light source	<b>LED 4000K</b>	Kelvin	<b>4000</b>
CRI	-	SDCM	-
Lumen	<b>454</b>	Watt	-
Efficacy	-	Light control	-
Min. Dim Level (%)	-	Surges	-
BUG Rating	-	L80B50 (hours)	-
Driver life	-		