

## 2-LT SQUARE FIXED

AMIGO, Recessed




### DESCRIPTION

Energy efficient hidden light sources for discreet illumination for all spaces. Designed for both commercial and residential applications, our recessed lighting provides essential directional lighting with a contemporary flare. With LED technologies constantly evolving, our new recessed collections emphasize these solutions.

### SPECIFICATIONS


MODEL	35145		
CONSTRUCTION	Forged aluminum heatsink with powder coating		
INSTALLATION TYPE	Remodel/existing ceiling		
CUT HOLE	12 1/4" x 6"		
FINISH	Black/White		
MINIMUM HEIGHT CLEARANCE	9.5"		
MAX CEILING THICKNESS	TRIM: 1.25" / TRIMLESS: 1.5"		
INPUT VOLTAGE	120V - 277V		
WATTAGE	26W non-IC		
DIMMING	TRIAC/ELV/0-10V		
LED PERFORMANCE	Up to 3934 Delivered Lumens ; L70: 50,000 hrs		
CCT	3000K/3500K		
BEAM ANGLE	Wide 40°		
DIFFUSERS	Clear		
ELECTRICAL APPROVAL	Compliant		
WARRANTY			
POWER SUPPLY	ERP 3 in 1 Dimmable Driver Minimum operating temperature: -30°		
ADJUSTABILITY	NO	ROTATION	NO
CRI	90+	APPROVED LOCATION	Damp

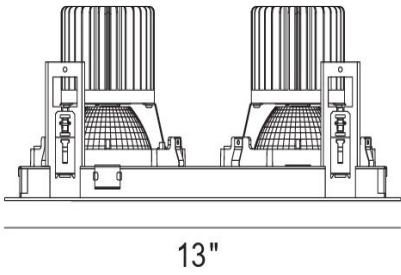

5 1/4"

Trim

Driver Box (included):



### ORDERING INFO

CODE: \_\_\_\_\_

# OF LIGHT	SHAPE	TRIMS	LIGHT MODULE	WATTAGE	CCT	FINISHES
1-LIGHT	ROUND	TRIMMED	SLIM	15 WATT	3000K	BLACK
2-LIGHT	SQUARE	TRIMLESS	FIXED	26 WATT	3500K	WHITE
3-LIGHT			GIMBAL			

\*All features, functionality and other product specifications are subject to change without notice.

## HOUSINGS (Optional)

Description		SKU#	Suitable for	Cut Hole
New Construction Plate		36208-012	Trim	12 1/4" X 6"
AT/IC Box		36209-019	Trim	12 1/4" X 6"


## SPECIFICATIONS OPTIONS

### 1 INSTALLATION TYPE




(T) TRIMMED

### 2 COLOR FINISH



(01) BLACK



(02) WHITE

 Custom

### 3 LIGHT MODULE OPTIONS



(SL)  
SLIM



(RF)  
FIXED




(RG)  
GIMBAL

### 4 CCT OPTIONS



(30) 3000K




(35) 3500K

\*All features, functionality and other product specifications are subject to change without notice.

## 3-LT SQUARE FIXED

AMIGO, Recessed

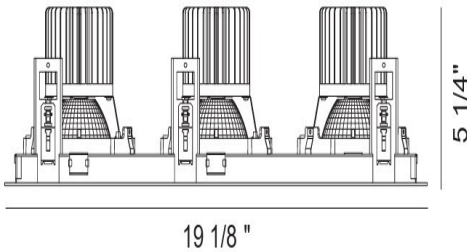

### DESCRIPTION



Energy efficient hidden light sources for discreet illumination for all spaces. Designed for both commercial and residential applications, our recessed lighting provides essential directional lighting with a contemporary flare. With LED technologies constantly evolving, our new recessed collections emphasize these solutions.

### SPECIFICATIONS

MODEL	35147		
CONSTRUCTION	Forged aluminum heatsink with powder coating		
INSTALLATION TYPE	Remodel/existing ceiling		
CUT HOLE	18 1/2" x 6"		
FINISH	Black/White		
MINIMUM HEIGHT CLEARANCE	9.5"		
MAX CEILING THICKNESS	TRIM: 1.25" /TRIMLESS: 1.5"		
INPUT VOLTAGE	120V - 277V		
WATTAGE	26W non-IC		
DIMMING	TRIAC/ELV/0-10V		
LED PERFORMANCE	Up to 5901 Delivered Lumens ; L70: 50,000 hrs		
CCT	3000K/3500K		
BEAM ANGLE	Wide 40°		
DIFFUSERS	Clear		
ELECTRICAL APPROVAL	Compliant		
WARRANTY			
POWER SUPPLY	ERP 3 in 1 Dimmable Driver Minimum operating temperature: -30°		
ADJUSTABILITY	NO	ROTATION	NO
CRI	90+	APPROVED LOCATION	Damp

Trim

Driver Box (included):

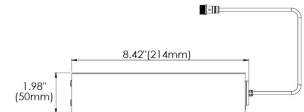

### ORDERING INFO

CODE: \_\_\_\_\_

# OF LIGHT	SHAPE	TRIMS	LIGHT MODULE	WATTAGE	CCT	FINISHES
1-LIGHT	ROUND	TRIMMED	SLIM	15 WATT	3000K	BLACK
2-LIGHT	SQUARE	TRIMLESS	FIXED	26 WATT	3500K	WHITE
3-LIGHT			GIMBAL			

\*All features, functionality and other product specifications are subject to change without notice.

## HOUSINGS (Optional)

Description	SKU#	Suitable for	Cut Hole
 <p>New Construction Plate</p>	36211-012	Trim	18 1/2" X 6"
 <p>AT/IC Box</p>	36212-019	Trim	18 1/2" X 6"

## SPECIFICATIONS OPTIONS

### 1 INSTALLATION TYPE




(T) TRIMMED

### 2 COLOR FINISH



(01) BLACK



(02) WHITE

 Custom

### 3 LIGHT MODULE OPTIONS



(SL)  
SLIM



(RF)  
FIXED



(RG)  
GIMBAL

### 4 CCT OPTIONS



(30) 3000K



(35) 3500K

\*All features, functionality and other product specifications are subject to change without notice.

Tel: 905.695.2055 Fax: 905.695.2056 Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390  
 eurofasearchitectural.com | www.eurofase.com

**EUROfase**  
ARCHITECTURAL