


2-LT SQUARE FIXED

AMIGO, Recessed

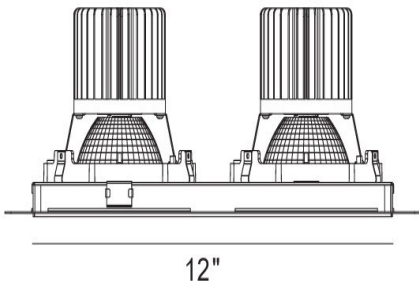

DESCRIPTION


Energy efficient hidden light sources for discreet illumination for all spaces. Designed for both commercial and residential applications, our recessed lighting provides essential directional lighting with a contemporary flare. With LED technologies constantly evolving, our new recessed collections emphasize these solutions.

SPECIFICATIONS

MODEL	35355		
CONSTRUCTION	Forged aluminum heatsink with powder coating		
INSTALLATION TYPE	Remodel/existing ceiling		
CUT HOLE	12 3/8" x 6 1/8"		
FINISH	Black/White		
MINIMUM HEIGHT CLEARANCE			
MAX CEILING THICKNESS	TRIM: 1.25" /TRIMLESS: 1.5"		
INPUT VOLTAGE	120V - 277V		
WATTAGE	26W non-IC		
DIMMING	TRIAC/ELV/0-10V		
LED PERFORMANCE	Up to 3934 Delivered Lumens ; L70: 50,000 hrs		
CCT	3000K/3500K		
BEAM ANGLE	Wide 40°		
DIFFUSERS	Clear		
ELECTRICAL APPROVAL	Compliant		
WARRANTY			
POWER SUPPLY	ERP 3 in 1 Dimmable Driver Minimum operating temperature: -30°		
ADJUSTABILITY	NO	ROTATION	NO
CRI	90+	APPROVED LOCATION	Damp

Trimless

Driver Box (included):



ORDERING INFO

CODE: _____

# OF LIGHT	SHAPE	TRIMS	LIGHT MODULE	WATTAGE	CCT	FINISHES
1-LIGHT	ROUND	TRIMMED	SLIM	15 WATT	3000K	BLACK
2-LIGHT	SQUARE	TRIMLESS	FIXED	26 WATT	3500K	WHITE
3-LIGHT			GIMBAL			

*All features, functionality and other product specifications are subject to change without notice.

HOUSINGS (Optional)

Description		SKU#	Suitable for	Cut Hole
New Construction Plate		36220-014	Trimless	12 3/8" X 6 1/8"
AT/IC Box		36221-011	Trimless	12 3/8" X 6 1/8"


SPECIFICATIONS OPTIONS

1 INSTALLATION TYPE




(TL) TRIMLESS

2 COLOR FINISH



(01) BLACK



(02) WHITE



Custom

3 LIGHT MODULE OPTIONS



(SL)
SLIM



(RF)
FIXED




(RG)
GIMBAL

4 CCT OPTIONS



(30) 3000K




(35) 3500K

*All features, functionality and other product specifications are subject to change without notice.

3-LT SQUARE FIXED

AMIGO, Recessed

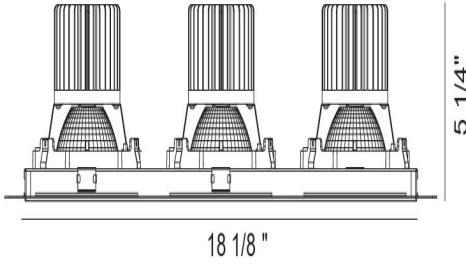

DESCRIPTION


Energy efficient hidden light sources for discreet illumination for all spaces. Designed for both commercial and residential applications, our recessed lighting provides essential directional lighting with a contemporary flare. With LED technologies constantly evolving, our new recessed collections emphasize these solutions.

SPECIFICATIONS

MODEL	35357		
CONSTRUCTION	Forged aluminum heatsink with powder coating		
INSTALLATION TYPE	Remodel/existing ceiling		
CUT HOLE	18 5/8" x 6 1/8"		
FINISH	Black/White		
MINIMUM HEIGHT CLEARANCE	9.5"		
MAX CEILING THICKNESS	TRIM: 1.25" /TRIMLESS: 1.5"		
INPUT VOLTAGE	120V - 277V		
WATTAGE	26W non-IC		
DIMMING	TRIAC/ELV/0-10V		
LED PERFORMANCE	Up to 5901 Delivered Lumens ; L70: 50,000 hrs		
CCT	3000K/3500K		
BEAM ANGLE	Wide 40°		
DIFFUSERS	Clear		
ELECTRICAL APPROVAL	Compliant		
WARRANTY			
POWER SUPPLY	ERP 3 in 1 Dimmable Driver Minimum operating temperature: -30°		
ADJUSTABILITY	NO	ROTATION	NO
CRI	90+	APPROVED LOCATION	Damp

Trimless

Driver Box (included):




ORDERING INFO

CODE: _____

# OF LIGHT	SHAPE	TRIMS	LIGHT MODULE	WATTAGE	CCT	FINISHES
1-LIGHT	ROUND	TRIMMED	SLIM	15 WATT	3000K	BLACK
2-LIGHT	SQUARE	TRIMLESS	FIXED	26 WATT	3500K	WHITE
3-LIGHT			GIMBAL			

*All features, functionality and other product specifications are subject to change without notice.

HOUSINGS (Optional)

Description		SKU#	Suitable for	Cut Hole
New Construction Plate		36223-015	Trimless	18 5/8" X 6 1/8"
AT/IC Box		36224-012	Trimless	18 5/8" X 6 1/8"

SPECIFICATIONS OPTIONS

1 INSTALLATION TYPE




(TL) TRIMLESS

2 COLOR FINISH



(01) BLACK



(02) WHITE



Custom

3 LIGHT MODULE OPTIONS



(SL)
SLIM




(RF)
FIXED




(RG)
GIMBAL

4 CCT OPTIONS



(30) 3000K



(35) 3500K

*All features, functionality and other product specifications are subject to change without notice.

Tel: 905.695.2055 Fax: 905.695.2056 Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390
 eurofasearchitectural.com | www.eurofase.com

EUROfase
ARCHITECTURAL