



# CIRCUS linear S1500 v2 1-10V 100-277V

ver. 20200404\_Rev\_0

year: 2015  
code: 2730337U20000  
type: hanging lamp  
application: indoor

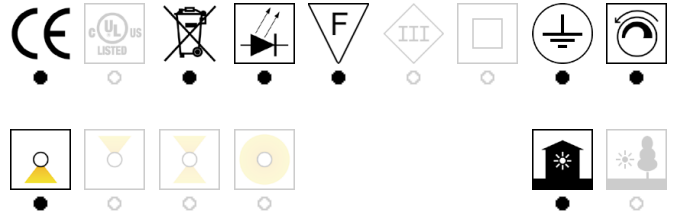


**Technical drawing**  
Size ref. image mm - inch

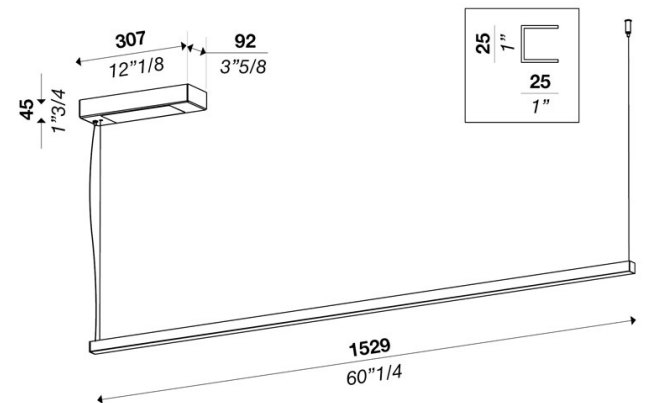

Technical data	
Light source	LED
Circuit structure	LED strip
Light emission direction	direct
Power	35 W
Source lumens	4900 lm
Source efficacy	140 lm/W
Consumption	40 W
Delivered lumens	3200 lm
Luminaire efficacy	80 lm/W
Secondary	24 V
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
Optional	
Emergency mode	○
Motion sensor	○
Directional	○
Packing	
Net weight	
Packaging 1	L1640 x W230 x H220 mm / 3.8 kg
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure	
Material	aluminium
Finish	white / variants page 2
Diffuser	
Material	polycarbonate
Finish	opal / variants page 2
Canopy	
Size	307 x 92 mm - 12" 1/8 x 3" 5/8 inch
Height	45 mm - 1" 3/4 inch
Ceiling mount	perpendicular / variants page 2

Electronics / Driver	
Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

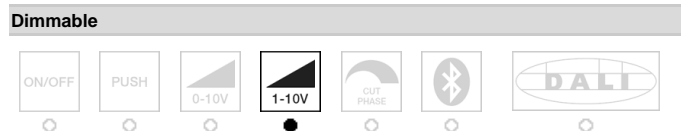

Hanging cables	
Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"

Warranty	
Duration	2 years

# CIRCUS linear S1500 v2 1-10V 100-277V

ver. 20200404\_Rev\_0

year: **2015**  
code: **2730337U20000**  
type: **hanging lamp**  
application: **indoor**

## Available variants

### Colour temperature

2700 k    3000 k    3500 k    4000 k    custom



### Colour rendering index

CRI 80    CRI 90    CRI 95    custom




### Structure finish

gold / brass    matt white    matt black    embossed white    embossed black    custom



### Diffuser / Optical

opal    transparent    transparent prismatic    satin    custom

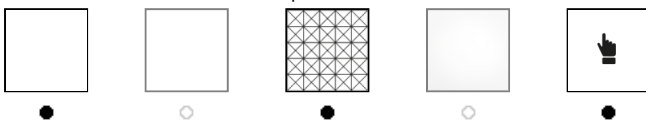

### Ceiling Mount

direct    perpendicular    conical    remote driver    custom

