
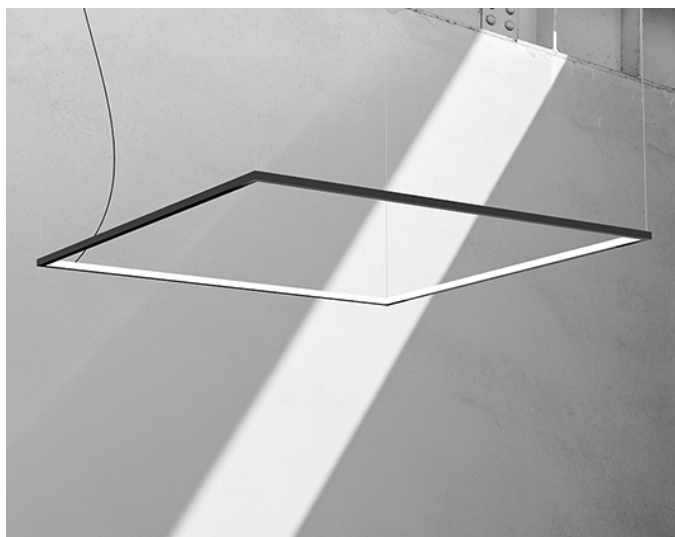


# CIRCUS rectangular S1000x1500 v2 1-10V 100-277V


ver. 20200404\_Rev\_0

year: 2015  
code: 2730361S20000  
type: hanging lamp  
application: indoor

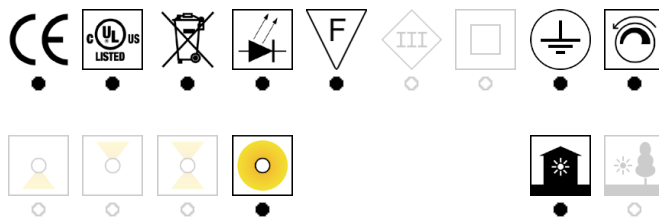

## Technical drawing

Size ref. image mm - inch

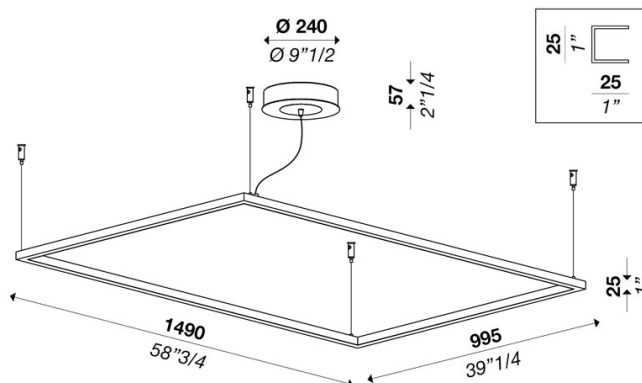

## Technical data

Light source	LED
Circuit structure	LED strip
Light emission direction	diffused
Power	110 W
Source lumens	15400 lm
Source efficacy	140 lm/W
Consumption	122 W
Delivered lumens	11100 lm
Luminaire efficacy	91 lm/W
Secondary	24 V
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	●

Optional	
Emergency mode	○
Motion sensor	○
Directional	○

## Packing

Net weight
Packaging 1
Packaging 2
Packaging 3
Packaging 4
Packaging 5

## Structure

Material	aluminium
Finish	white / variants page 2

## Diffuser

Material	polycarbonate
Finish	opal / variants page 2

## Canopy

Size	240 mm - 9" 1/2 inch
Height	57 mm - 2" 1/4 inch
Ceiling mount	perpendicular / variants page 2

## Electronics / Driver

Included	Yes
Quantity	2
Voltage	100-277V 50/60 Hz

## Dimmable



## Hanging cables

Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"

## Warranty

Duration	2 years
----------	---------

# CIRCUS rectangular S1000x1500 v2 1-10V 100-277V

ver. 20200404\_Rev\_0

year: **2015**  
code: **2730361S20000**  
type: **hanging lamp**  
application: **indoor**

## Available variants

### Colour temperature

2700 k    3000 k    3500 k    4000 k    custom



### Colour rendering index

CRI 80    CRI 90    CRI 95    custom




### Structure finish

gold / brass    matt white    matt black    embossed white    embossed black    custom



### Diffuser / Optical

opal    transparent    transparent prismatic    satin    custom

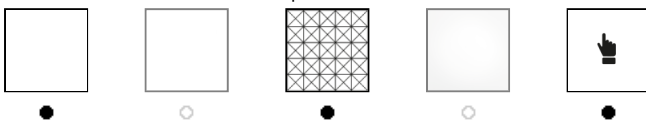

### Ceiling Mount

direct    perpendicular    conical    remote driver    custom

