


hollis+morris

apogee pendant duo

product installation + specifications

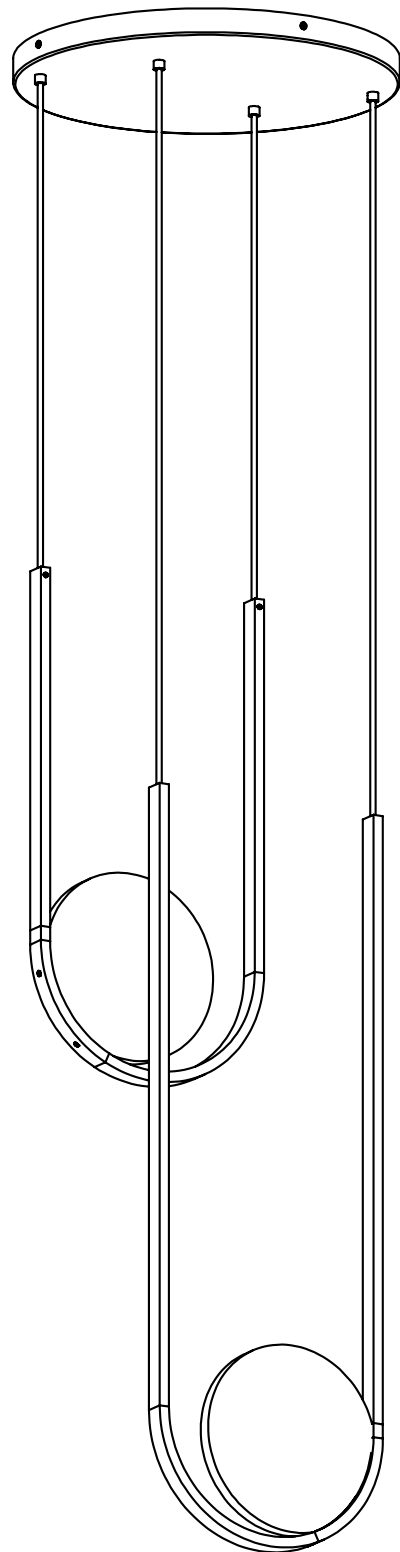

apogee pendant

product code:

APOGpendant

materials:

- + metal
- + frosted acrylic
- + fabric covered cord

finish:

- + powder coated or plated steel

input:

- + 120-277V

driver:

- + 24V phase dimmable driver
- + driver included with canopy
- + 277 VAC- 0-10V dimmable driver available upon request


output:

- + 12 W
- + 1056 lumens
- + 3000K with CRI of 90 or higher


suspension:

- + cord length: 5' standard (custom lengths available)
- + 2-point suspension (per fixture)
- + single canopy connection
- + canopy supplied with fixture



certification:

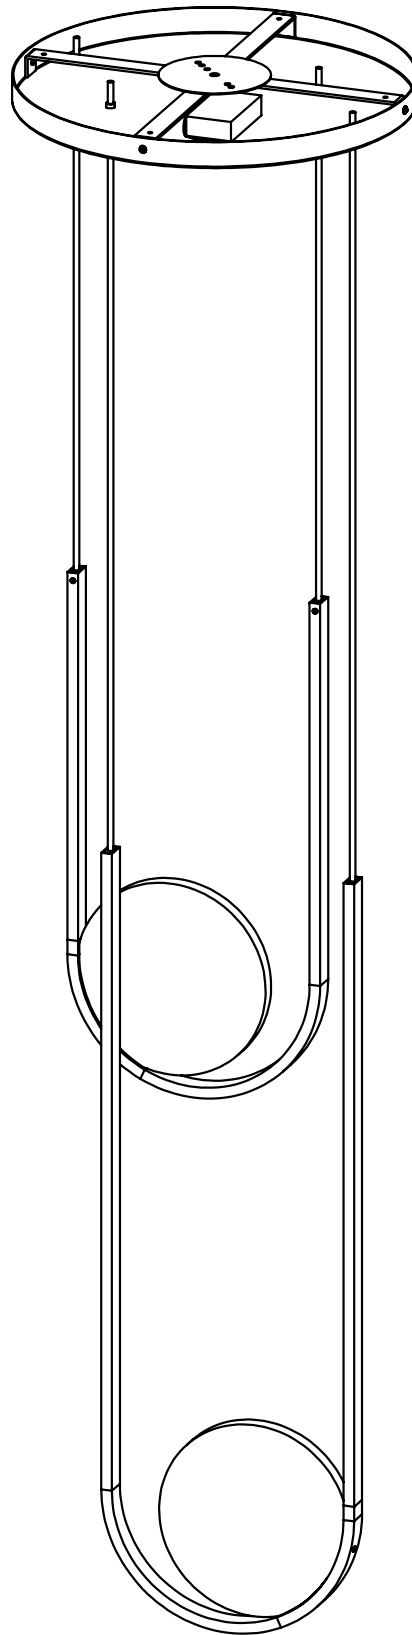

dimensions + installation

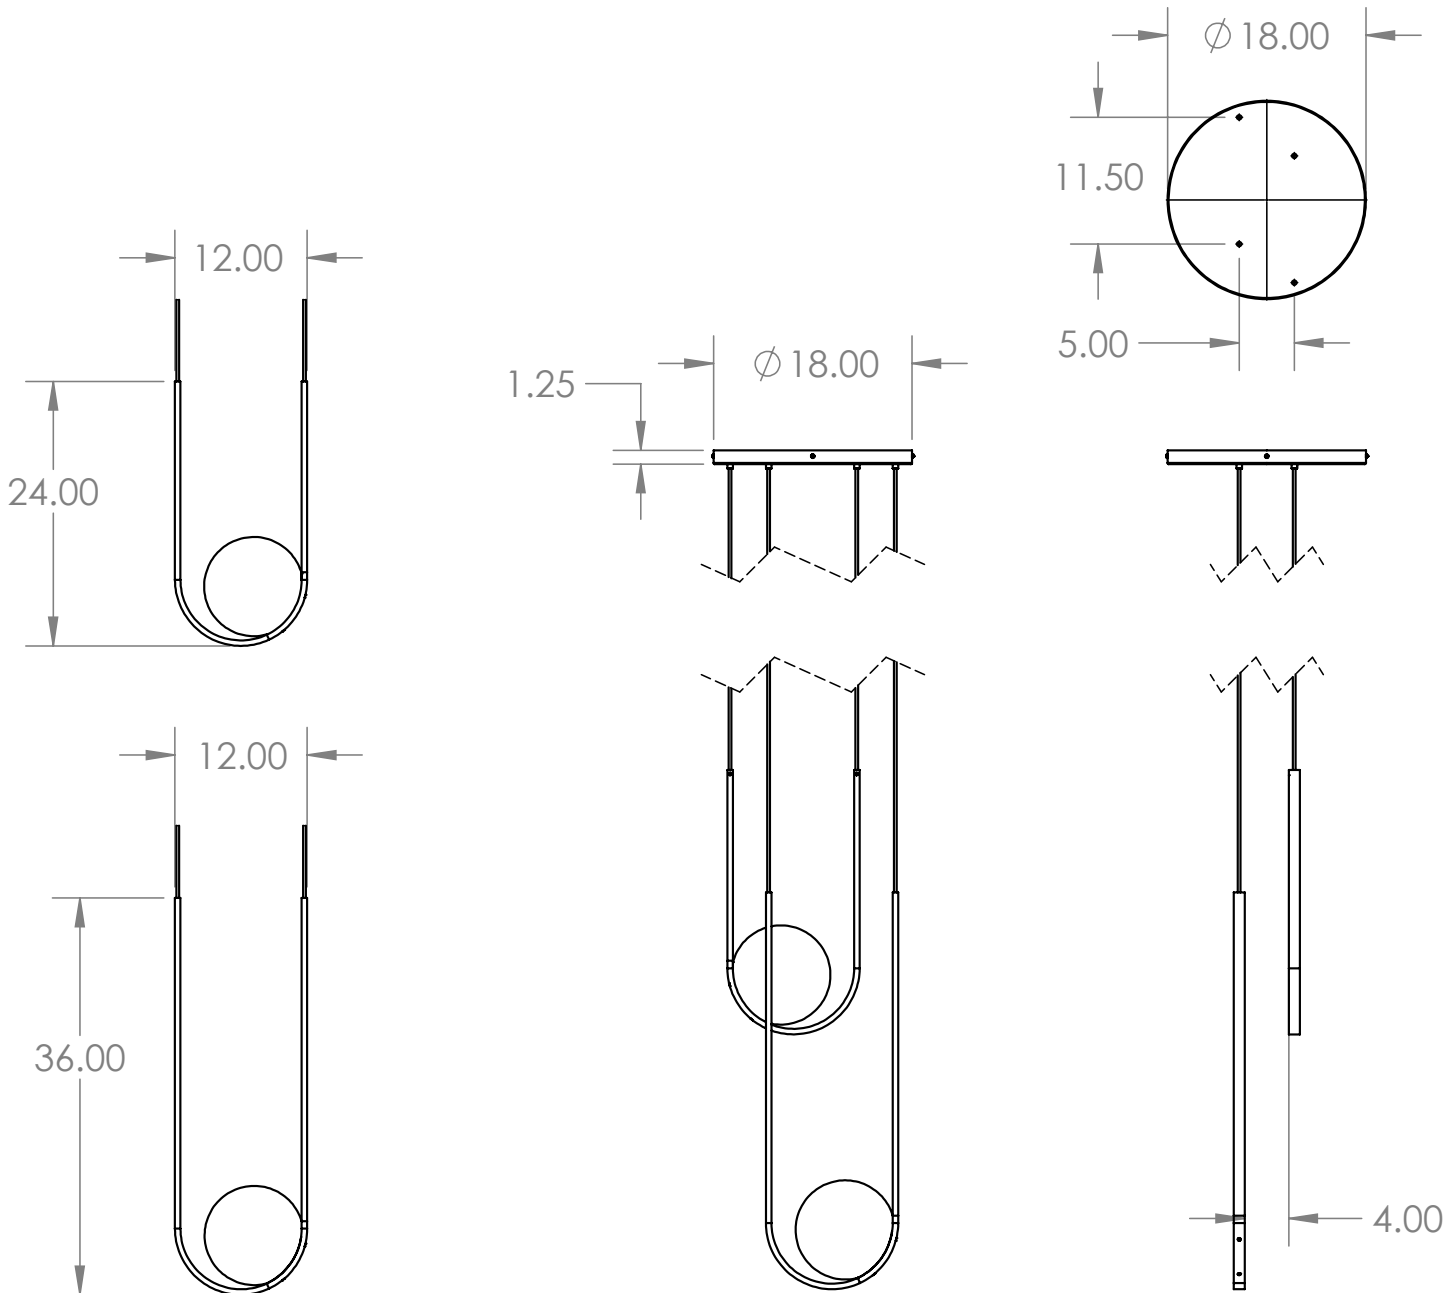

dimensions + installation

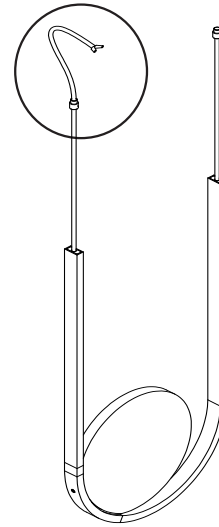
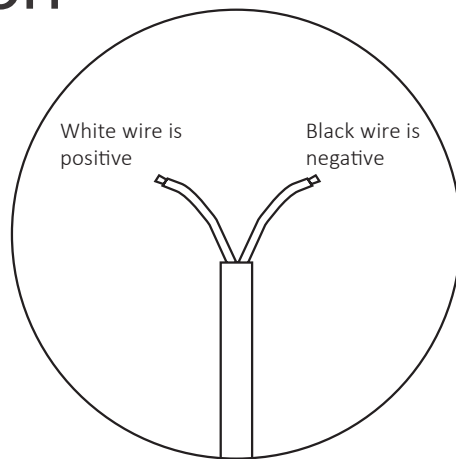


Only one labeled cable with ends pre-stripped connects to power

1. Locate desired canopy location on ceiling & have a certified electrician connect driver to 120V domestic power.
2. Connect suspension cable from fixture to canopy as illustrated below.
3. Feed fabric covered power line into canopy as illustrated below.
4. Connect +/- leads to 24V transformer inside canopy.
5. Secure all connections.
6. Adjust all cables to desired heights (standard x length max. = 60")

Connect live, neutral and earth wires to mains and ground.

Connect matching colour coded +/- wires to +/- wires on the powered suspension cord. All wire colour coding is marked on the driver.

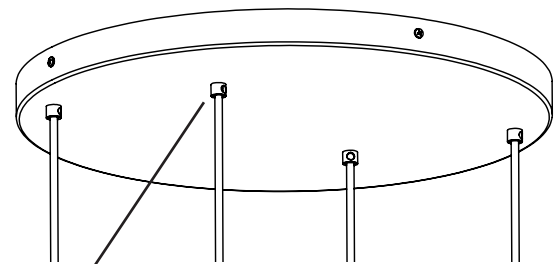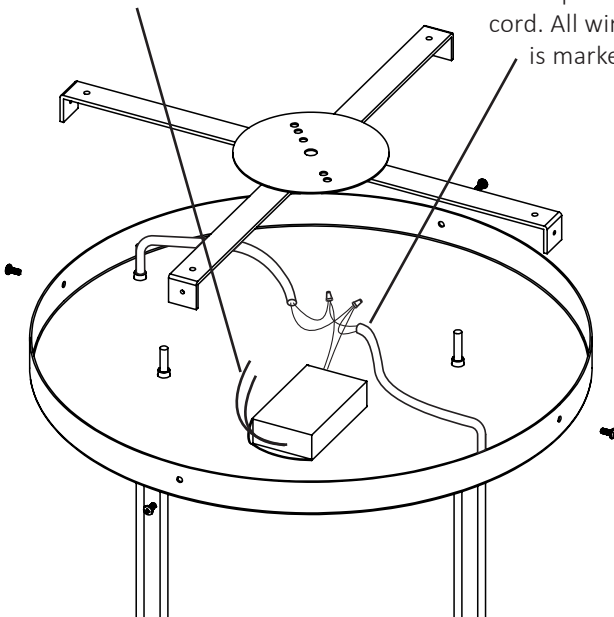

Fabric covered suspension cord feed through cord grippers on canopy.