

hollis+morris



apogee
pendant
product installation + specifications



apogee pendant

product code:
APOGpendant

materials:

- + Metal
- + Frosted acrylic
- + Fabric-covered cord

input:

- + 120V 50/60 Hz (Canada + US)

output:


- + 8.8 W
- +150 lumens
- + 3000K

driver:

- + 120VAC - 24VDC
 - + 24V phase dimmable driver
 - + 277 VAC - 0-10V dimmable
- driver also available upon request

suspension and canopy:


- + 2 point suspension (per fixture)
- + Single canopy connection
- + 5' standard cord length
(custom length available)
- + Canopy supplied with fixture

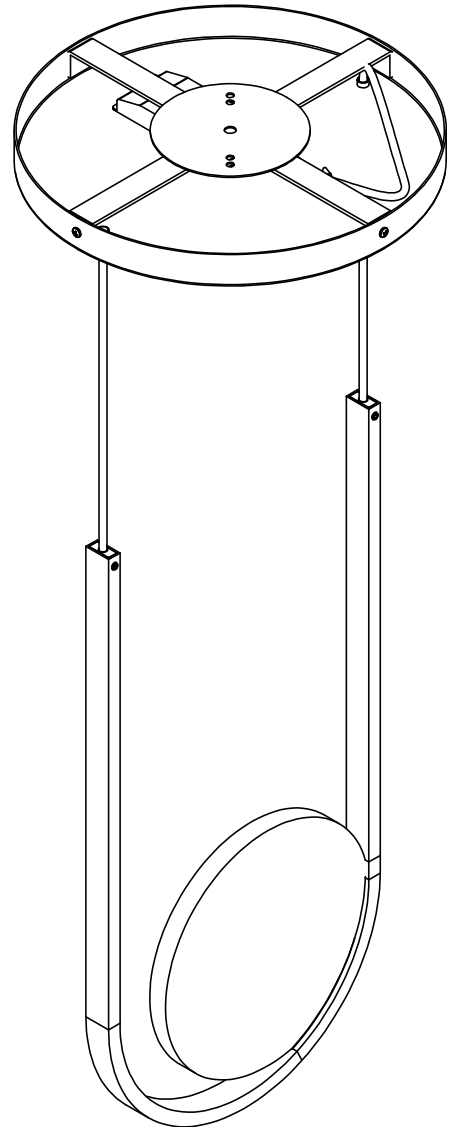


certification:




dimensions + installation

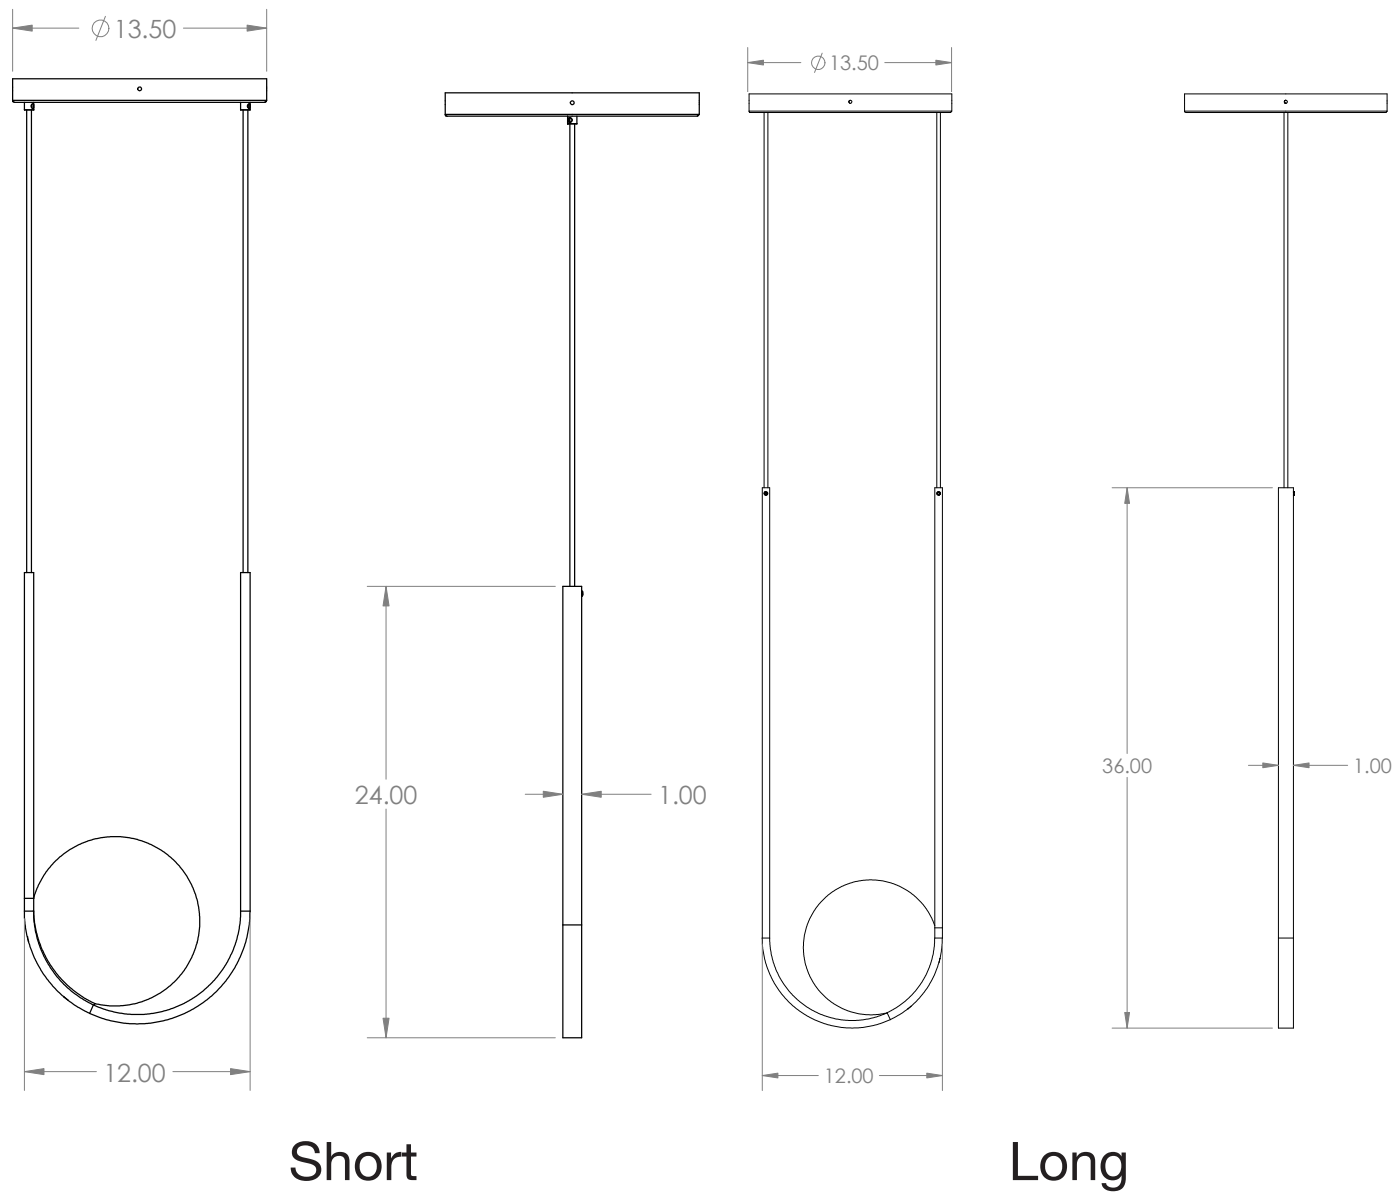


dimensions + installation

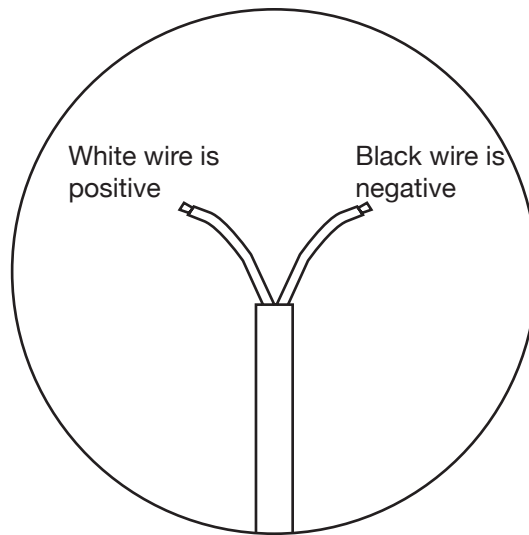

Only one labeled cable with ends pre-stripped connects to power

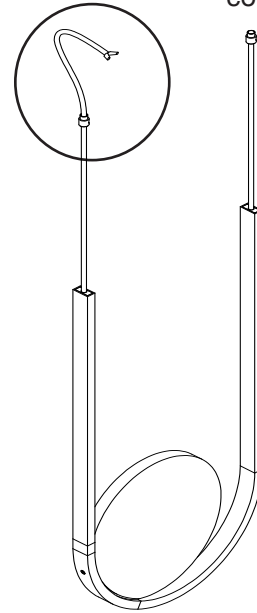

1. Locate desired canopy location on ceiling & have a certified electrician connect driver to 120V domestic power.
2. Connect suspension cable from fixture to canopy as illustrated below.
3. Feed fabric covered power line into canopy as illustrated below.
4. Connect +/- leads to 24V transformer w/in canopy.
5. Secure all connections.
6. Adjust all cables to desired heights (standard x length max. = 144")

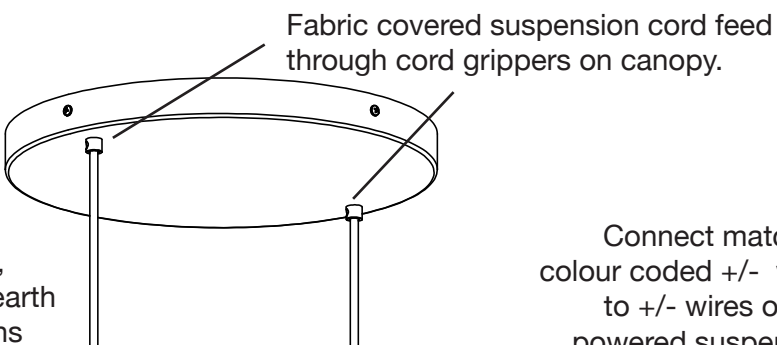

Connect live, neutral and earth wires to mains and ground.

