



- ① Fissare la staffa a soffitto (utilizzare tasselli appropriati in base al tipo di soffitto).
Fix the bracket on the ceiling (use appropriate anchors depending on the type of ceiling).




USA




CE

- ② Eseguire il cablaggio come mostrato nello schema.
Complete the wiring as shown in the diagram.

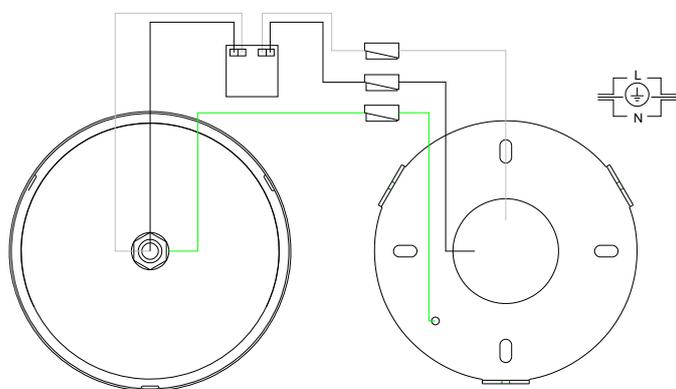


USA

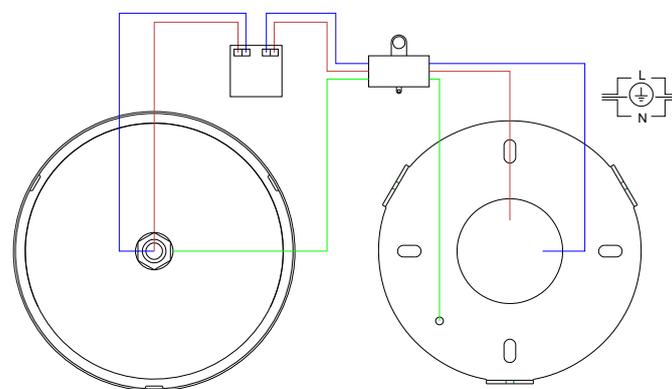

CE

- ③ Allentare il grano del tubo per regolare l'altezza a cui si vuole posizionare la lampada accumulando nel rosone il cavo in eccesso.

Loosen the grain of the pipe to adjust the height to which you want to place the accumulating lamp excess cable in the rose

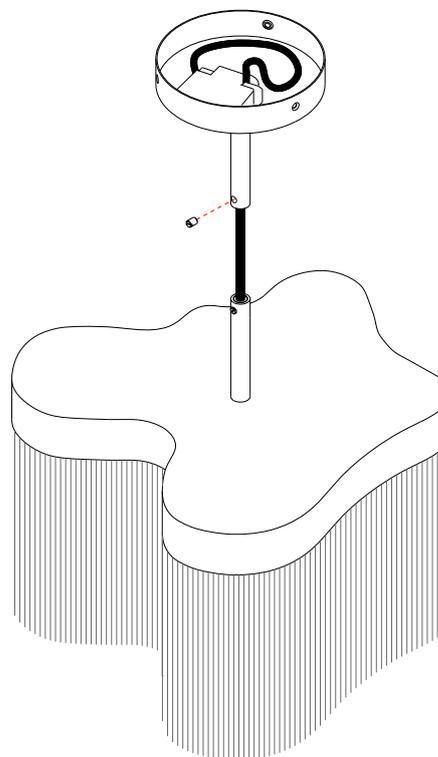


⚠ **ATTENZIONE!**


Nel caso in cui si decidesse di accorciare il cavo della lampada, seguire lo schema sottostante per riconnettere i cavi all'alimentatore.

WARNING!

In case you decide to shorten the lamp cable, follow the diagram below to reconnect the cables to the driver

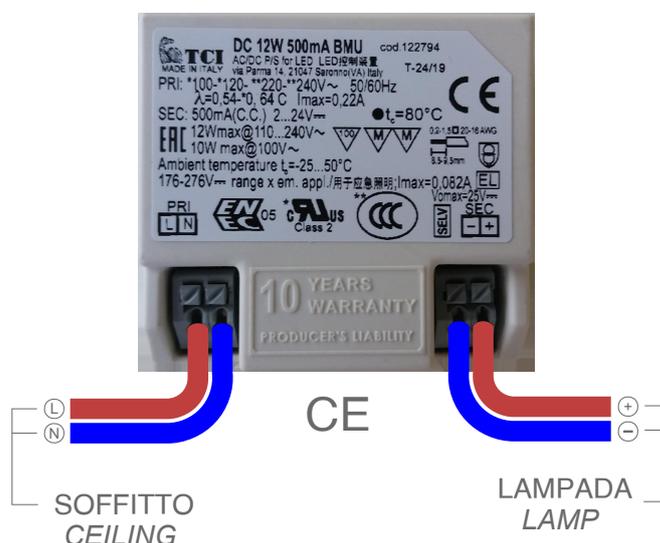

- ④ Regolata l'altezza, stringere il grano e fissare il rosone alla piastra tramite le viti fornite
Once the height is adjusted, tighten the grain and the rosette to the plate through the screws supplied

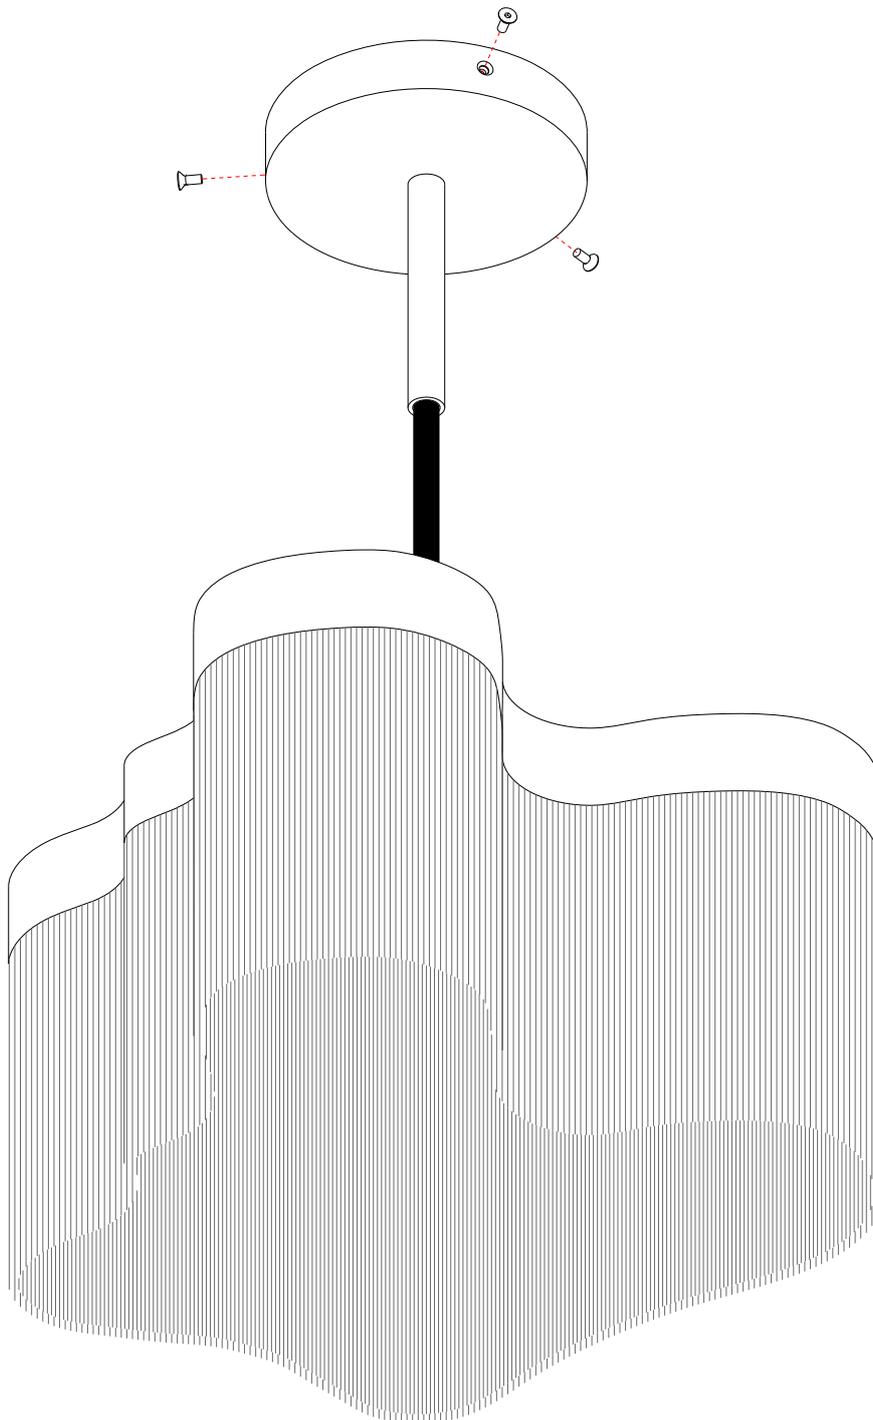

DC BMU - 12W 500mA

TCI



ALIMENTATORE DRIVER

1/1

Direct current electronic drivers
Alimentatori elettronici in corrente continua

TCI LED  Made in Italy

constant CURRENT **constant VOLTAGE**

IS 15885 (Part 2 / Sec 13)  (7)  UL-CLASS2 (Part 2 / Sec 13)  (3)       

RIPPLE FREE

1+2kV DIFF. 2kV COMM. 



BUILT-IN SCREW FIXING Weight - Peso gr. 45 / 1,6 oz.
Pcs - Pezzi 70

WIRING DIAGRAM

