

Chilone

design by *Ernesto Gismondi*



SERIES OF LIGHT FIXTURES WITH DIRECT EMISSION AND HIGH-PERFORMANCE LED LIGHT SOURCES.

CHILONE WALL

- CAN BE INSTALLED WITH THE LIGHT DIRECTED EITHER DOWNWARDS OR UPWARDS
- AVAILABLE IN 2 FINISHES: PAINTED GREY WHITE (RAL9002) OR RUST
- LAMP UNIT IN DIE-CAST EN-AB 47100 ALUMINUM
- UV RESISTANT DIFFUSER IN SHOCK RESISTANT POLYCARBONATE WITH SATIN FINISH
- LAMP SUPPORT IN EXTRUDED EN-AW-6060 ALUMINUM
- WALL SUPPORT IN STEEL INCLUDED
- PAINTING IS OBTAINED BY MEANS OF 3-STAGE OUTDOOR TREATMENT : NANOTECHNOLOGIES, ANTIOXIDANT PRIMER, POLYESTER PAINT
- AISI 316 STAINLESS STEEL SCREWS AND SILICONE SEAL GASKET
- STANDARD NON DIMMABLE. FOR POTENTIAL DIMMING OPTION, PLEASE CONTACT YOUR ARTEMIDE SALES REPRESENTATIVE.
- ELECTRONIC DRIVER INTEGRATED
- PROVIDED WITH IP67 CABLE AND CONNECTOR FOR THE MAIN CONNECTIONS

CHILONE FLOOR

- AVAILABLE WITH DOWNWARD EMISSION IN 17 11/16" (45 cm) AND 35 7/16" (90 cm) OR WITH UPWARD EMISSION
- AVAILABLE IN 2 FINISHES: PAINTED GREY WHITE (RAL9002) OR RUST
- LAMP UNIT IN DIE-CAST EN-AB 47100 ALUMINUM
- UV RESISTANT DIFFUSER IN SHOCK RESISTANT POLYCARBONATE WITH SATIN FINISH
- SUPPORT POLE IN EXTRUDED EN-AW-6060 ALUMINUM, CHROMATE TREATED AND PAINTED
- MOUNTING PLATE IN FOLDED, WELDED AND PAINTED STEEL, WITH HOLES FOR GROUND FIXING BY MEANS OF LOCK BOLTS OR DOWELS; INCLUDED
- PAINTING IS OBTAINED BY MEANS OF 3-STAGE OUTDOOR TREATMENT : NANOTECHNOLOGIES, ANTIOXIDANT PRIMER, POLYESTER PAINT
- AISI 316 STAINLESS STEEL SCREWS AND SILICONE SEAL GASKET
- STANDARD NON DIMMABLE. FOR POTENTIAL DIMMING OPTION, PLEASE CONTACT YOUR ARTEMIDE SALES REPRESENTATIVE.
- ELECTRONIC DRIVER INTEGRATED
- PROVIDED WITH IP67 CABLE AND CONNECTOR FOR THE MAIN CONNECTIONS

Chilone pole



Chilone 90



CHILONE POLE

- AVAILABLE WITH DOWNWARD EMISSION IN 98 7/16" (250 CM)
- AVAILABLE IN 2 FINISHES: PAINTED GREY WHITE (RAL9002) OR RUST
- LAMP UNIT IN DIE-CAST EN-AB 47100 ALUMINUM
- UV RESISTANT DIFFUSER IN SHOCK RESISTANT POLYCARBONATE WITH SATIN FINISH
- IN-GROUND SUPPORT POLE IN EXTRUDED EN-AW-6060 ALUMINUM INCLUDED. MUST BE INSTALLED BY MEANS OF A PROPER FOUNDATION PLINTH
- PAINTING IS OBTAINED BY MEANS OF 3-STAGE OUTDOOR TREATMENT: NANOTECHNOLOGIES, ANTIOXIDANT PRIMER, POLYESTER PAINT
- AISI 316 STAINLESS STEEL SCREWS AND SILICONE SEAL GASKET
- STANDARD NON DIMMABLE. FOR POTENTIAL DIMMING OPTION, PLEASE CONTACT YOUR ARTEMIDE SALES REPRESENTATIVE.
- ELECTRONIC DRIVER INTEGRATED
- PROVIDED WITH IP67 CABLE AND CONNECTOR FOR THE MAIN CONNECTIONS

Chilone up





Chilone 45




CHILONE 45 FLOOR

LED 8W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
0,45 m	1,0 m	3,0 m	35 lux	357 lux	0.2 lux
18"	39"	118"	3.3 fc	33 fc	0.02 fc

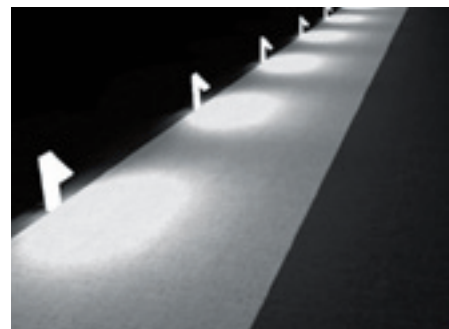



CHILONE 90 FLOOR


LED 8W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
0,90 m	1,0 m	4,0 m	18 lux	70 lux	0.2 lux
35"	39"	157"	1.7 fc	6.5 fc	0.02 fc



CHILONE POLE

LED 16W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
2,50 m	2,50 m	9,25 m	3 lux	8 lux	0.4 lux
98"	98"	364"	0.3 fc	0.75 fc	0.04 fc

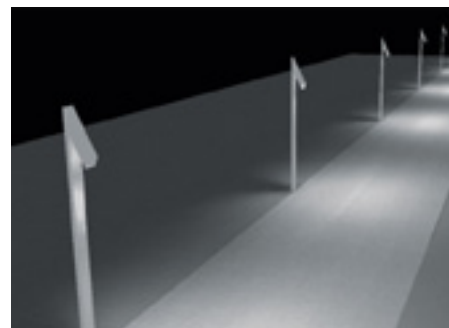



CHILONE WALL




IP65

 Tested in accordance with **IES LM-79-08**

code	lampping	power consumption	lumens	CCT	CRI	finish
T082408	6 LED	16W	639lm	3000K	80	● grey white
T082418	6 LED	16W	639lm	3000K	80	● rust

Electronic driver integrated



cd

CHILONE UP FLOOR




IP65


 Tested in accordance with **IES LM-79-08**

code	lampping	power consumption	lumens	CCT	CRI	finish
T082308	6 LED	16W	515lm	3000K	80	● grey white
T082318	6 LED	16W	515lm	3000K	80	● rust

Electronic driver integrated



cd



CHILONE 45 FLOOR




IP65


 Tested in accordance with **IES LM-79-08**

code	lampping	power consumption	lumens	CCT	CRI	finish
T082208	6 LED	8W	194lm	3000K	80	● grey white
T082218	6 LED	8W	194lm	3000K	80	● rust


Electronic driver integrated



cd



lux



CHILONE 90 FLOOR




IP65


 Tested in accordance with **IES LM-79-08**

code	lampping	power consumption	lumens	CCT	CRI	finish
T082108	6 LED	8W	194lm	3000K	80	● grey white
T082118	6 LED	8W	194lm	3000K	80	● rust


Electronic driver integrated





cd



lux





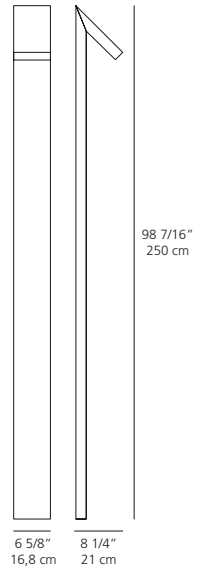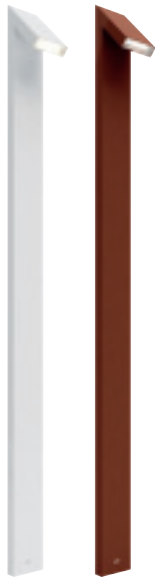

CHILONE POLE

IP65




Tested in accordance with IES LM-79-08

code	lampping	power consumption	lumens	CCT	CRI	finish
T082008	6 LED	16W	310lm	3000K	80	grey white
T082018	6 LED	16W	310lm	3000K	80	rust


Electronic driver integrated



Asymm.



cd



lux

