


## LED Pendant Mounts

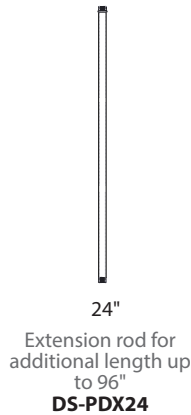

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 5 year warranty

### SPECIFICATIONS

**Input:** Universal voltage 120V - 277VAC, 50/60Hz  
**Dimming:** Electronic low voltage (ELV) : 100% - 5%  
 0-10V: 100% - 1%  
**Light Source:** High output 3 Step Mac Adam Ellipse COB  
 Rated life of 60,000 hours at L70  
**Finish:** Electrostatically powder coated, white, black, bronze and graphite  
**Standards:** IP65 rated, UL & cUL wet location listed  
 Title 24 JA8 Compliant

### ORDERING NUMBER

Diameter	Watt	Beam Angle	Color Temp	CRI	Reference Lumen	Output <sup>1</sup> CBCP	Efficacy (Lm/W)	Light Distribution	Finish		
	5" 25W	S Spot	16°	927	2700K	90	1825	10050	73		<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
				827	2700K	85	2090	12057	88		
				930	3000K	90	1895	10427	76		
				830	3000K	85	2300	12644	92		
				835	3500K	85	2350	12937	94		
				840	4000K	85	2375	13062	95		
	5" 17W	N Narrow	25°	927	2700K	90	1810	5280	72		
				827	2700K	85	2170	6335	87		
				930	3000K	90	1880	5478	75		
				830	3000K	85	2275	6643	91		
				835	3500K	85	2330	6797	93		
				840	4000K	85	2350	6863	94		
	5" 17W	F Flood	33°	927	2700K	90	1900	4515	76		
				827	2700K	85	2280	5417	91		
				930	3000K	90	1970	4685	79		
830				3000K	85	2390	5681	96			
835				3500K	85	2445	5812	98			
840				4000K	85	2470	5870	99			

**DC-PD05-** \_\_\_\_\_ - \_\_\_\_\_

<sup>1</sup>Reference output shows 25W output. Multiply by 0.7 to determine output for 17W combinations.

Example: **DC-PD05-S930-GH**

### MOUNTING ACCESSORIES

	Extension Rod	<b>DS-PDX24</b>	One 24" extension rod for DC-PD05 Can be field cut	Finish <b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
--	---------------	-----------------	---	--

Example: **DS-PDX24-WT**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761