
lؾf

DANDELION

DDLN S LED UL | SET UP

CONTENTS



TECHNICAL SPECIFICATIONS

. . . . Integrated LED

 \bigcirc

COB 31 x 4 W 135mA 120-277V 60Hz 🔨

120W



Shade.	1 un.
Canopy.	1 un.
Level.	1 un.
Stoppers	3 un.

1

2 3 4



3

120 - 277V



•••••	• • • • • • • • • • • • • • • • • • • •	
WEIGHT		
Net Weight	29,1 Lb	
Gross Weight	50,7 Lb	
•••••••••••••••••••••••••••••••••••••••		

WARNINGS


Before assembly and installing this product, carefully read the following:

Turn off the mains before installing the lamp. Dry location only. This lamp is for indoor use only.

WOOD VENEER: Due to the natural nature of the material sometimes one may note slight ondulations in the wood veneer. This is a natural reaction to humidity or different climatic conditions and should go away with use. Since wood is a natural material, a gradual change in tone may occur over time. Furthermore, if the lamps have been purchased at different times, there will be differences in colour and tone, particularly in light coloured veneers. Luziferlamps S.L. will not be held responsible for this.



DDLN S LED UL | SET UP

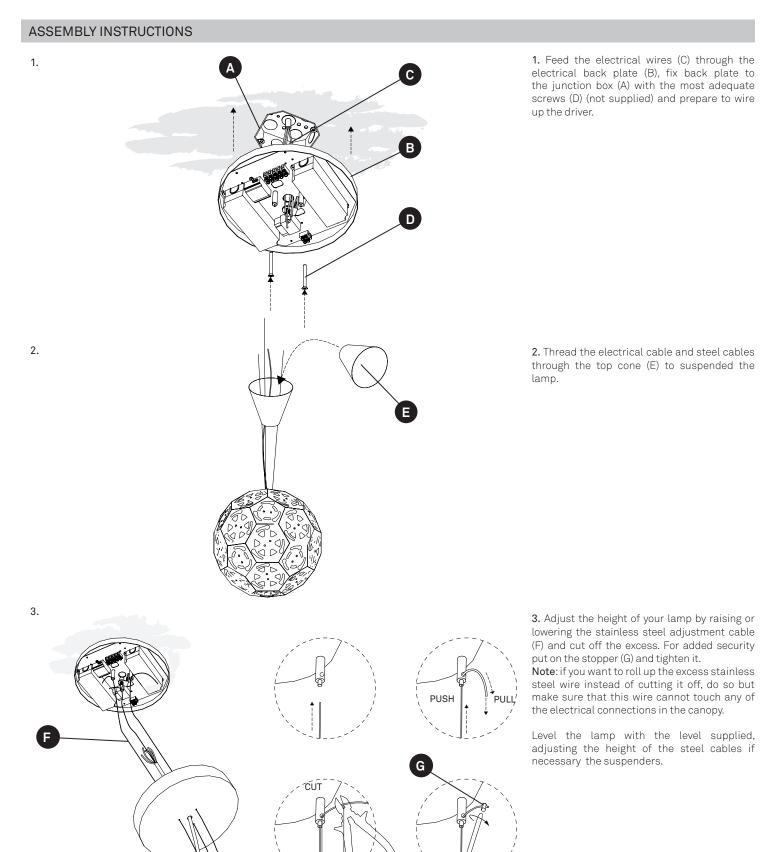


0,8"

2/4


DDLN S LED UL | SET UP

ASSEMBLY INSTRUCTIONS


4. OPTION 1 NON DIMMABLE







5. LAMP CONNECTION

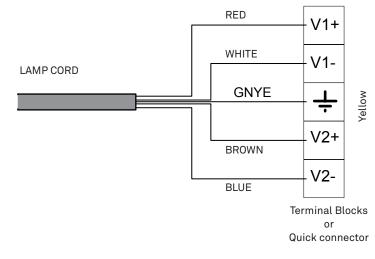

4. MAINS CONNECTION OPTIONS

Turn off the mains before installing the lamp. Connect the lamp to the mains as follows.

OPTION 1: NON DIMMABLE

You should have a three wire cable coming from the mains.

Connect poles **N** and **GND** (\downarrow) as shown in the terminal block Orange. Connect the line (L) that goes through the switch of tour installation to the pole **F** (terninal block Orange) Poles D- and D+ are not used.

OPTION 2: DIMMING

You should have a five wire cable coming from the mains.

Connect poles **N** and **GND** (\Rightarrow) as shown in the terminal block Orange. Connect the line (L) that goes through the switch installation to the pole **F** (terminal block Orange).

After connecting the mains wires to the terminal block take the other two wires (the +/- dimming controls) and connect them to the dimming terminal block. (terminal block Pink). To do this you will need to remove the resistor from the terminal block and connect the dimming control wires in its place.


5. LAMP CONNECTION


In the canopy (B) connect the electrical cable from the lamp to the terminal block or quick connector indicated (Yellow).



DDLN S LED UL | SET UP

ASSEMBLY INSTRUCTIONS






7.


6. Tighten the screw on the electrical cable trap (G).

Once all your wiring is complete raise the canopy and screw on the canopy support nut that holds the cover in place.

7. Put on the cable clip (H) and clip it to the electrical cable.

8.





LONG CONES 12 ud. Place the cones by turning them.
Turn on the mains again.

© Luziferlamps, S.L. Valencia, Spain. 2018. All rights reserved. www.import-ent.com support@import-ent.com

REV.06-2018

GENERAL CARE INSTRUCTIONS

Use and care of your lamp.

You have just purchased an original handmade product by LZF. Your lamp is made out FSC® certified natural wood with our patented veneer finish Timberlite®. This treatment both protects and safeguards the wood veneer against breakages.

Depending on the type of fixture use a feather duster, soft cleaning cloth or damp cloth for cleaning. On our more delicate shades, like those made from wood strips, a feather duster or an air blower is preferable. In our more solid shades a damp cloth may be used. Clean only the flat surface of the veneer with the cloth, and please avoid any moisture contact along the edge of the veneer.

Acrylic Diffusers

The acrylic diffusers on your lamp can be cleaned with a regular window cleaning spray and a soft cloth. Do not use solvents of any kind.

.

Integrated LED All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.

Precautions

Luminaire for indoor use only. Avoid direct sunlight, strong indirect sunlight and moisture on your lamp. Unplug the lamp before cleaning or changing the light bulb. Instalation of the fixture should only be performed by qualified electrical personnel or by the LZF service department. D88_344