


TUBE ARCHITECTURAL DS-PD06

LED Pendant Mounts

WAC LIGHTING

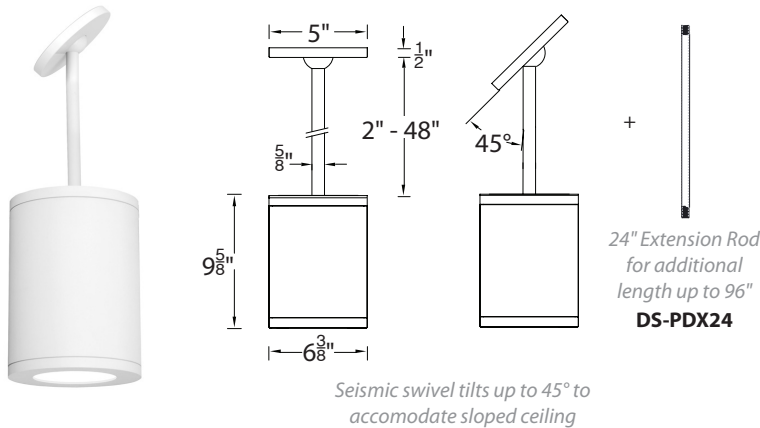

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	Electronic low voltage (ELV) : 100% - 5% 0-10V: 100% - 1%
Light Source:	High output 3 Step Mac Adam Ellipse COB Rated life of 60,000 hours at L70
Finish:	Electrostatically powder coated, white, black, bronze and graphite
Standards:	IP65 rated, ETL & cETL wet location listed, Energy Star® 2.2 rated Title 24 JA8-2016 Compliant
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	Reference Output ¹	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish
DS-PD06	6" 35W	S Spot	16°	927	2700K	90	2820	18842	81		BK Black WT White BZ Bronze GH Graphite
				27	2700K	85	3385	22608	97		
				930	3000K	90	2925	19543	84		
				30	3000K	85	3535	23632	101		
				35	3500K	85	3630	24255	104		
				40	4000K	85	3665	24490	105		
DS-PD0622	6" 22W	N Narrow	28°	927	2700K	90	2800	7992	80		BK Black WT White BZ Bronze GH Graphite
				27	2700K	85	3360	9589	96		
				930	3000K	90	2900	8290	83		
				30	3000K	85	3510	10024	100		
				35	3500K	85	3600	10288	103		
				40	4000K	85	3635	10388	104		
		F Flood	38°	927	2700K	90	2825	5451	81		BK Black WT White BZ Bronze GH Graphite
				27	2700K	85	3390	6540	97		
				930	3000K	90	2930	5654	84		
				30	3000K	85	3545	6836	101		
				35	3500K	85	3640	7017	104		
				40	4000K	85	3675	7085	105		

DS-PD06-_____ - _____

¹Reference output shows 35W output. Multiply by 0.7 to determine output for 22W combinations.

Example: DS-PD06-S930-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



TUBE ARCHITECTURAL DS-PD06

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

MOUNTING ACCESSORIES

	<i>Extension Rod</i>	DS-PDX24	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	Finish	
				BK <i>Black</i>	
				WT <i>White</i>	
				BZ <i>Bronze</i>	
				GH <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760