



EMINENCE™

PRODUCT DESCRIPTION

The Eminence™ frame-lit vanity mirror has risen to prominence among designers, adding prestige and distinction to every room it graces. Its unique shadow-box frame, inward-facing task lighting, and ambient wall-glow combine to create the perfect balance of form and function.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with integrated one-touch dimming. LEDs will be mounted in a 90-degree channel in the frame of the mirror, with inward-facing directional lighting on the front face of the mirror, and ambient glow behind the mirror. LEDs shall have an L70 life of >54,000 hours, with a greater than or equal to 90 CRI (color rendering index) and will be covered by an integrated diffuser. Product shall incorporate a driver enclosure that is to be mounted to the back of the mirror. Product will have a 7-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility


LIGHTING FEATURES AND BENEFITS

- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- One-touch dimmable inward-facing task lighting for brilliant facial illumination
- One-touch dimmable perimeter wall-glow ambient lighting with diffuser for a finished side view
- Greater illuminance with half the power consumption of traditional LED mirrors

GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Sleek and modern profile
- Suitable for damp bathroom environments
- Energy efficient
- Fast lead times
- Easy installation
- 7-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA


FINISHES



DEFAULT LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Front-of-glass illumination: 348 initial lumens/foot
- Wall-glow illumination: 720 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 100 lumens/watt
- Color temperature (CCT): 3,000K
- LED L70 Lifespan (calculated): >54,000-hours
- Built-in EMX™ diffuser

DIMENSIONAL DRAWING (Not to scale.)

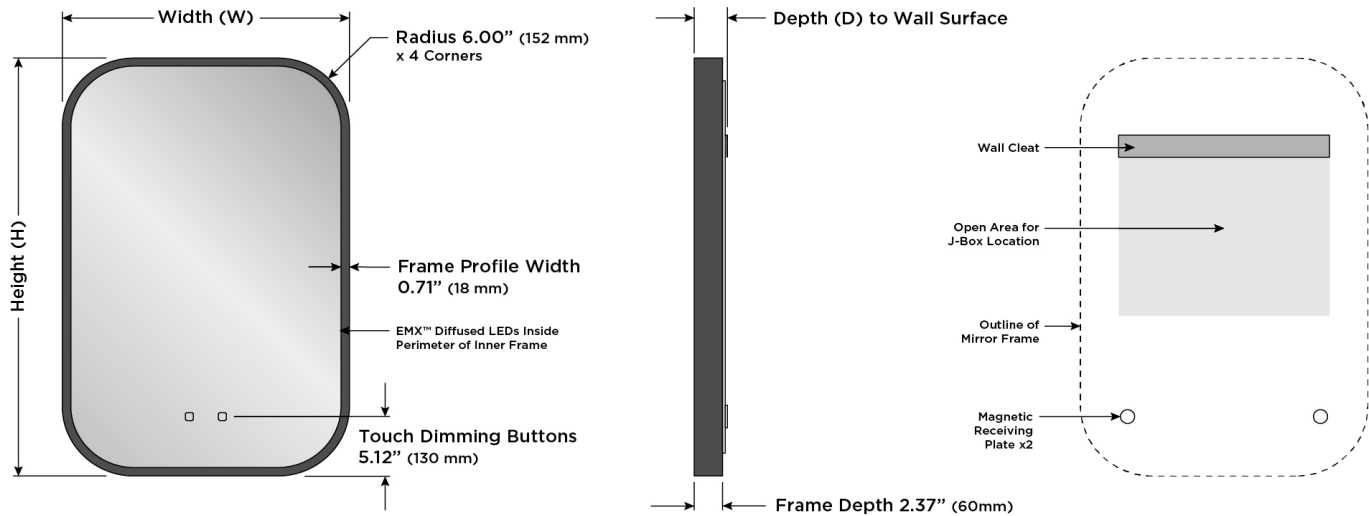

STANDARD MODELS

Model Number ¹	Finish	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
EMN-2436-BK05	Matte Black (BK-05)	24" W x 36" H x 2.76" D (610mm W x 914mm H x 70mm D)	9,010	120VAC, 82W
EMN-2436-BR02	Brushed Brass (BR-02)			
EMN-3042-BK05	Matte Black (BK-05)	30" W x 42" H x 2.76" D (762mm W x 1,067mm H x 70mm D)	11,146	120VAC, 101W
EMN-3042-BR02	Brushed Brass (BR-02)			

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; whip provided with mirror; junction box controlled by a wall switch (by others) is required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by non-dimming wall switch (by others) for on/off, and capacitive touch button on fixture for dimming
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.