



FUSION™ WARDROBE

PRODUCT DESCRIPTION

The Fusion™ lighted wardrobe mirror offers the perfect blend of clean, strong lines and efficient, natural-looking LED lighting, creating a distinctly modern statement of prestige as a prominent focal piece for bedrooms, bathrooms, and walk-in closets.

SPECIFICATION STATEMENT

Solution shall consist of a lighted wardrobe-length mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (54 LEDs/foot) replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 1,280 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming
- Phase/triac dimming technology

GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- ADA compliant
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: www.electricmirror.com/patents
- Made in America with U.S. and global components

AVAILABLE OPTIONS


- [Ava™ touch-tunable white + dimming technology](#)¹
- Custom sizes
- Cord connect

DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 1,280 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 54 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs

¹ See technology specification sheets for more details.

DIMENSIONAL DRAWING (Not to scale.)

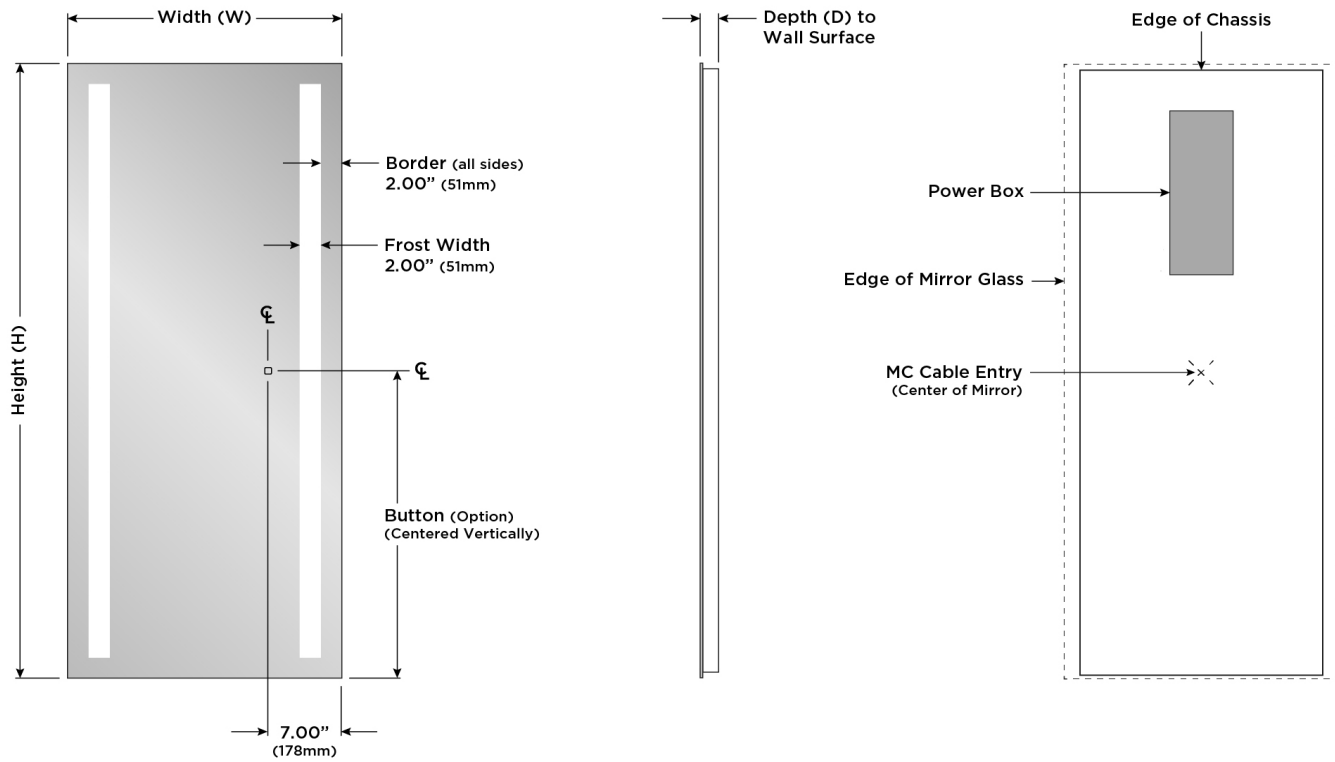

STANDARD MODELS

Model Number ¹	Model Type	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
FUS-2660	Base	26" W x 60" H x 1.75" D (660mm W x 1,524mm H x 44mm D)	14,082	120-277VAC, 107W
FUS-2660-AK	With Ava™		6,305	120 or 277VAC, 83W

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120-277VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Base model controlled by phase/triac dimming wall switch (by others)
- Ava™ model controlled by capacitive touch button on fixture or non-dimming on/off wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.

Technology specifications and nomenclature are subject to change without notice.

Electric Mirror reserves the right to revise the part number specified based on the latest standards.