



RADIANCE™

PRODUCT DESCRIPTION

Radiance™ defines modern luxury with a precision-crafted aluminum frame and sleek architectural form. Its unique inward-facing, Frame-Lit™ front-of-glass LED lighting creates a soft, diffused halo—studio-quality illumination that enhances natural features with clarity. Designed to elevate the everyday, Radiance brings refined lighting and sophistication to your vanity space.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with LEDs mounted in a 45-degree channel in the frame of the mirror, with inward-facing directional lighting on the front face of the mirror. LEDs shall have an L70 calculated life of 140,000 hours, with a greater than or equal to 90 CRI (color rendering index) and will be covered by an integrated diffuser. Product shall incorporate a wall-mounted driver enclosure with integrated wall cleat. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- Dimmable inward-facing task lighting for brilliant facial illumination ideal for makeup application and grooming
- Greater illuminance with half the power consumption of traditional LED mirrors
- Phase/triac dimming technology


GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Sleek and modern profile
- Suitable for damp bathroom environments
- Fast lead times
- Easy installation
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: www.electricmirror.com/patents
- Made in America with U.S. and global components

AVAILABLE OPTIONS

- Defogger
- Custom sizes


FINISHES



DEFAULT LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Front-of-glass illumination: 302 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 100 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (calculated): 140,000-hours
- Built-in EMX™ diffusers

DIMENSIONAL DRAWING (Not to scale.)

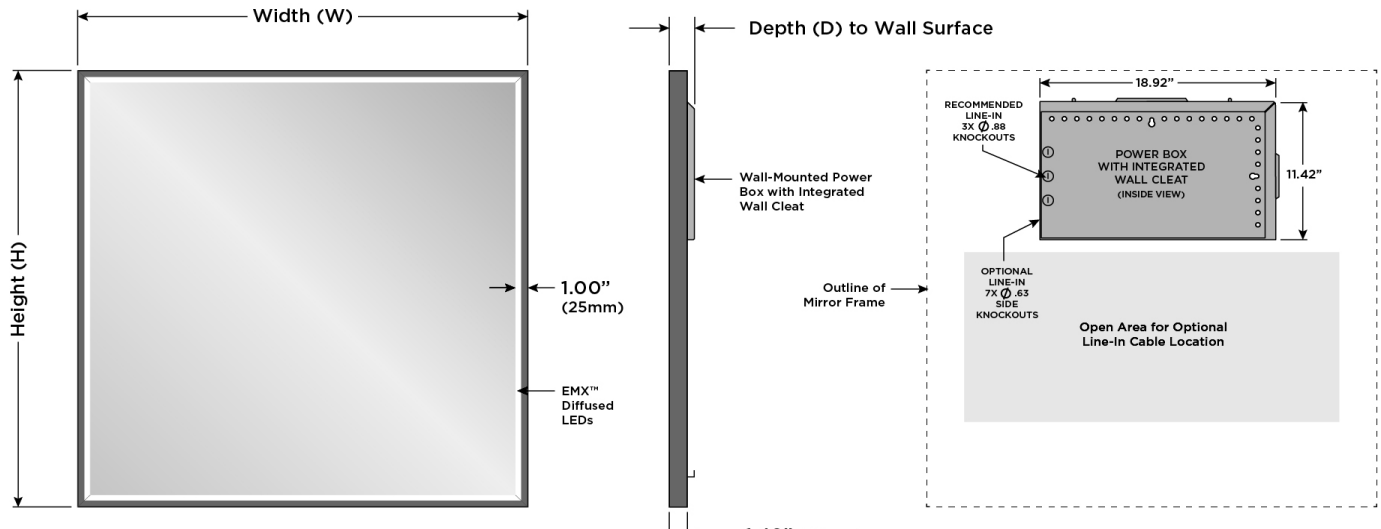

STANDARD MODELS

Model Number ¹	Finish	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
RAD-2436-BK05	Matte Black (BK-05)	24" W x 36" H x 2" D (610mm W x 914mm H x 51mm D)	2,943	120-277VAC, 36W
RAD-2436-BR02	Brushed Brass (BR-02)			
RAD-2436-CH04	Etched Chrome (CH-04)			
RAD-3636-BK05	Matte Black (BK-05)	36" W x 36" H x 2" D (914mm W x 914mm H x 51mm D)	3,546	120-277VAC, 43W
RAD-3636-BR02	Brushed Brass (BR-02)			
RAD-3636-CH04	Etched Chrome (CH-04)			
RAD-4836-BK05	Matte Black (BK-05)	48" W x 36" H x 2" D (1,219mm W x 914mm H x 51mm D)	4,150	120-277VAC, 50W
RAD-4836-BR02	Brushed Brass (BR-02)			
RAD-4836-CH04	Etched Chrome (CH-04)			
RAD-6036-BK05	Matte Black (BK-05)	60" W x 36" H x 2" D (1,524mm W x 914mm H x 51mm D)	4,753	120-277VAC, 57W
RAD-6036-BR02	Brushed Brass (BR-02)			
RAD-6036-CH04	Etched Chrome (CH-04)			

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120-277VAC hardwire electrical connection; direct wire from behind power box or provide whip to reach side knockout; junction box not required
- Power box with integrated wall cleat should be mounted to wall studs; mounting holes are provided
- Controlled by phase/triac dimming wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.