



## SARATOGA™ WARDROBE

### PRODUCT DESCRIPTION

Saratoga™ elevates the dressing space with its tall, pill-shaped silhouette and inset perimeter frost. Integrated LED lighting casts a smooth, even glow, enhancing both light and scale. Sculptural and refined, Saratoga turns a wardrobe essential into modern luxury.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted wardrobe-length mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (54 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 1,280 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming
- Phase/triac dimming technology

### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- Title 24 compliant <sup>1</sup>
- JA8-2022 compliant
- 7-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS

- [Ava™ touch-tunable white + dimming technology](#) <sup>2</sup>
- Custom sizes


### DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 1,280 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 54 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs

<sup>1</sup> Title 24 compliance requires 0-10V or phase/triac dimming

<sup>2</sup> See technology specification sheets for more details.

**DIMENSIONAL DRAWING** (Not to scale.)

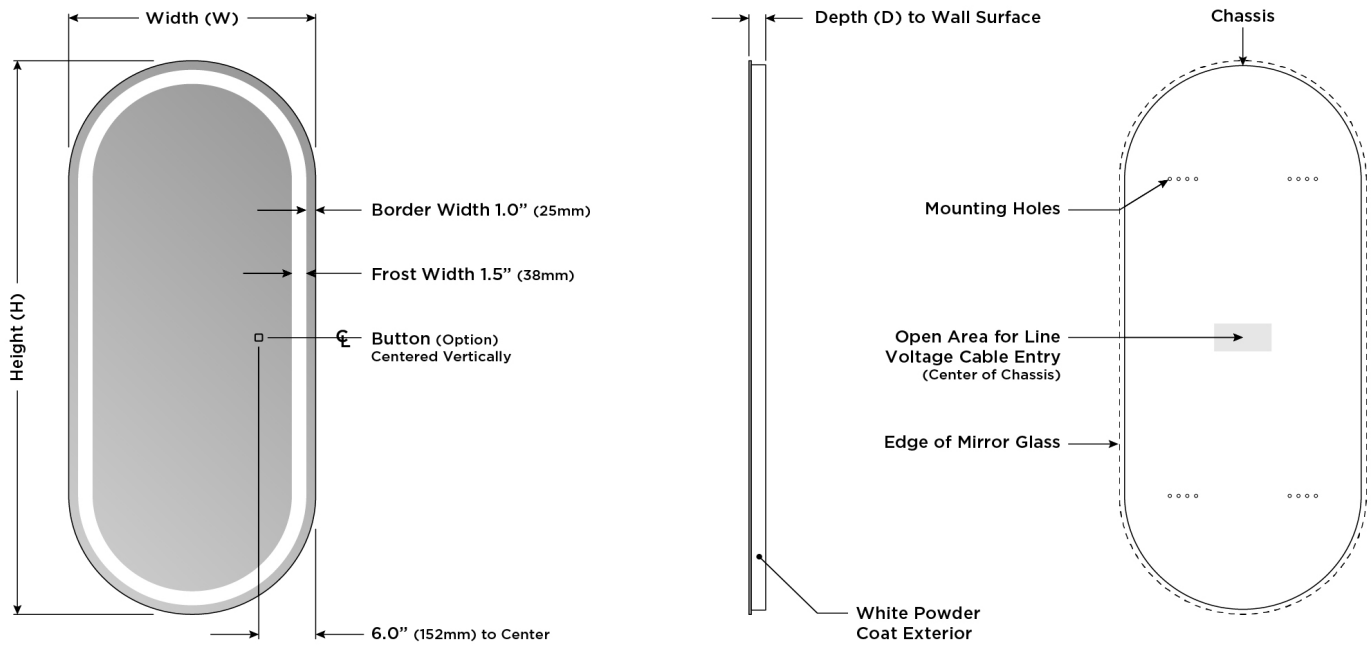

**STANDARD MODELS**

Model Number <sup>1</sup>	Model Type	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
SAR3-26.00X60.00-LSE-30K	Base	26" W x 60" H x 1.75" D	13,655	120-277VAC, 104W
SAR3-26.00X60.00-AK-LSE-WR-30K	with Ava™	(660mm W x 1,524mm H x 44mm D)	7,478	120 or 277VAC, 85W

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 12" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Base model controlled by phase/triac dimming wall switch (by others)
- Ava™ model controlled by capacitive touch button on fixture or non-dimming on/off wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.