



# MIDWAY

RECESSED COLLECTION



## 3.5" 45368 ROUND FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\varnothing 3 \frac{3}{4}$ ".
- Fixture:  $\varnothing 4 \frac{3}{8}$ " x  $3 \frac{1}{4}$ "H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

#### LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 702 lm | 750 lm | 818 lm | 859 lm | 854 lm


#### CERTIFICATIONS




### ORDERING GUIDE

MODEL	FINISH
45368-028	Black
45368-011	White


### ACCESSORIES



	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\varnothing 3 \frac{3}{4}$ "	12W	Up to 859	CCT Selectable	TRIAC/ELV	90+	38°	NO



### PRODUCT DIMENSIONS

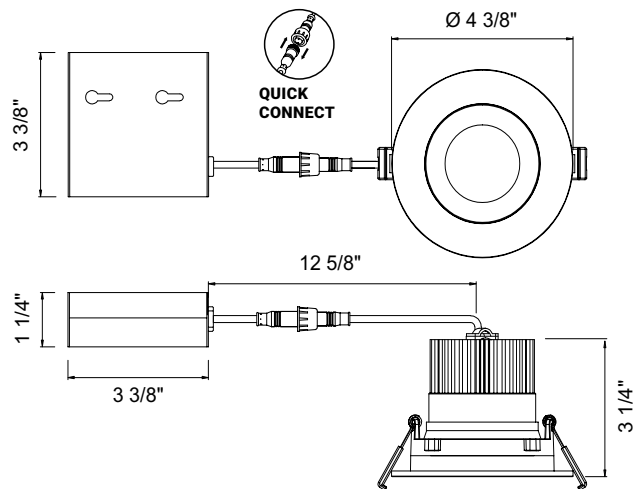





**MIDWAY**  
RECESSED COLLECTION



### Imperial

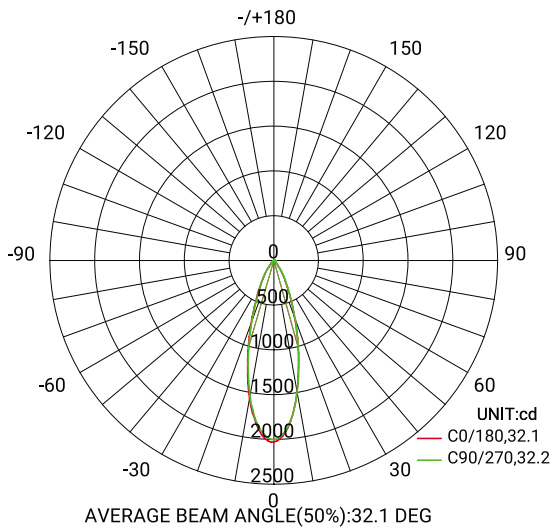


Flux out: 351.3 lm

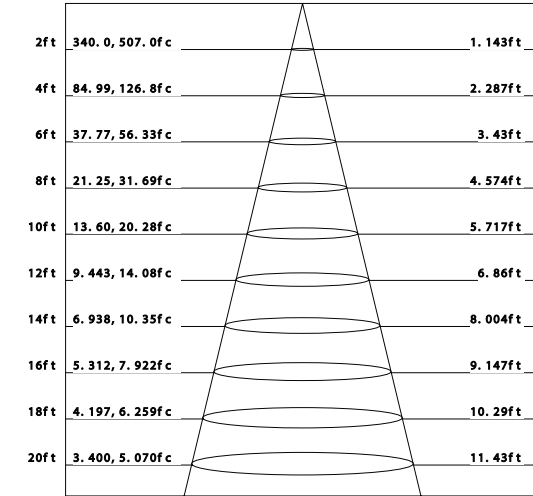


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


### Metrics

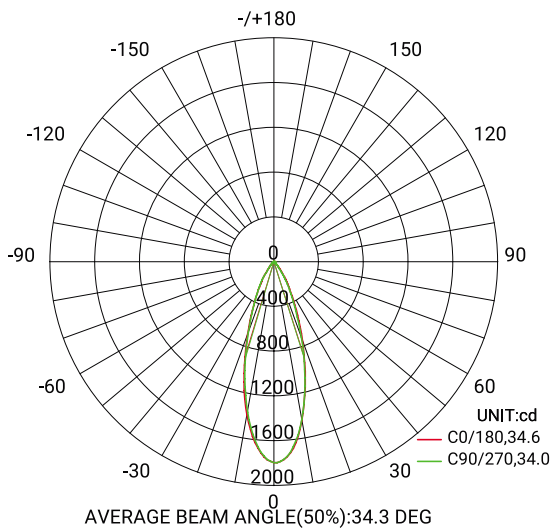

Flux out: 384.7 lm

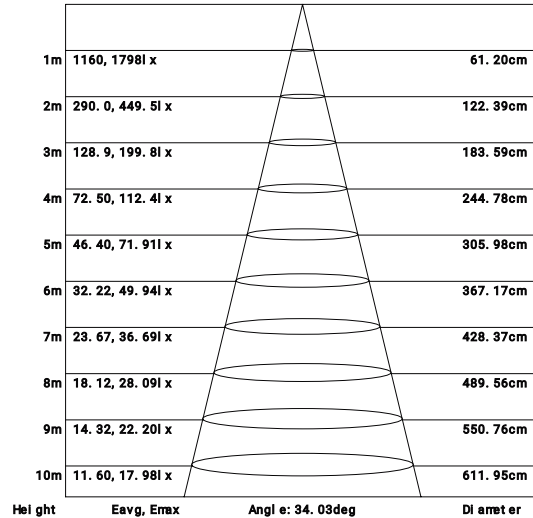

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



# MIDWAY

RECESSED COLLECTION



## 3.5" 45369 ROUND REGRESSED GIMBAL




The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\phi 3 \frac{3}{4}$ ".
- Fixture:  $\phi 4 \frac{3}{8}$ " x 3 1/4"H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

#### LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin: 27K | 30K | 35K | 40K | 50K
- Lumen: 719 lm | 763 lm | 826 lm | 861lm | 851lm


#### CERTIFICATIONS




### ORDERING GUIDE

MODEL	FINISH
45369-025	Black
45369-018	White

### ACCESSORIES




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\phi 3 \frac{3}{4}$ "	12W	Up to 861	CCT Selectable	TRIAC/ELV	90+	38°	30°



#### FINISHES



#### PRODUCT DIMENSIONS

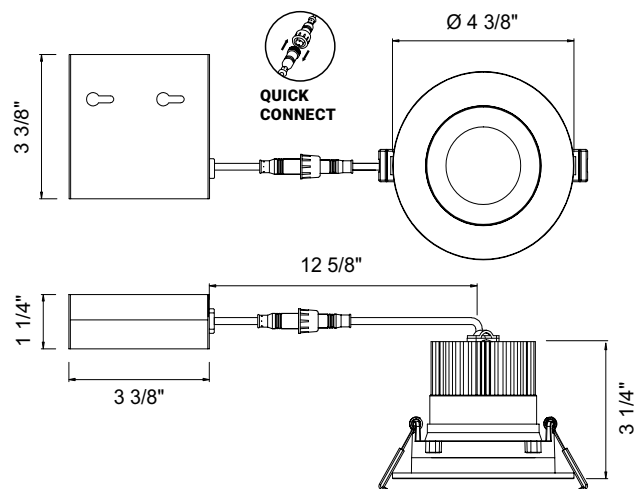




# MIDWAY


RECESSED COLLECTION



## Imperial

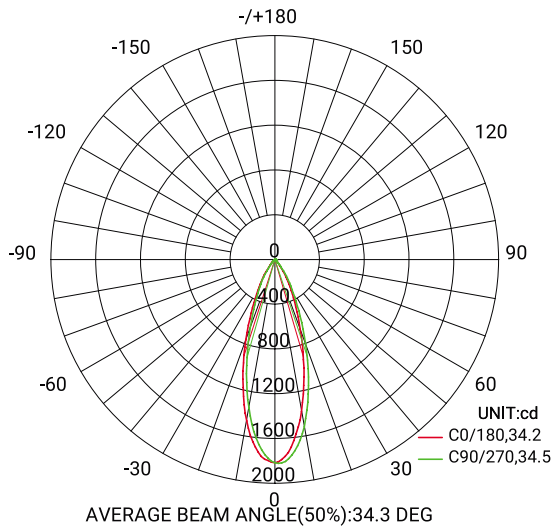


Flux out: 889.9 lm

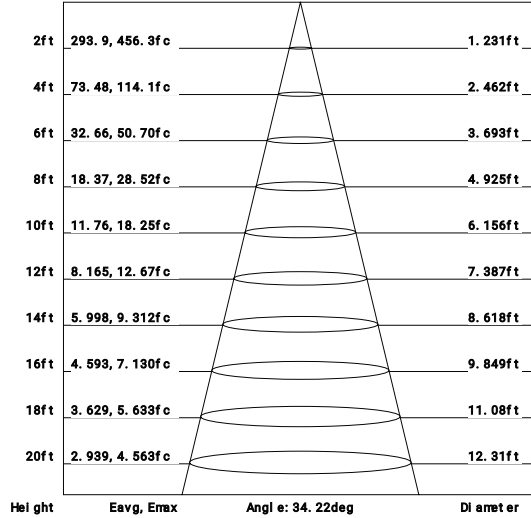


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


## Metrics

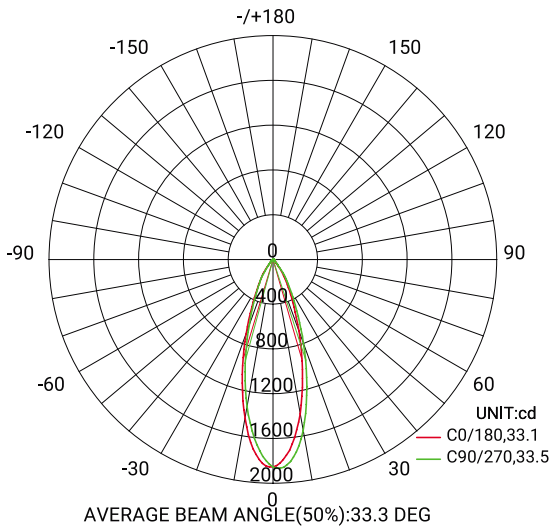

Flux out: 361.0 lm

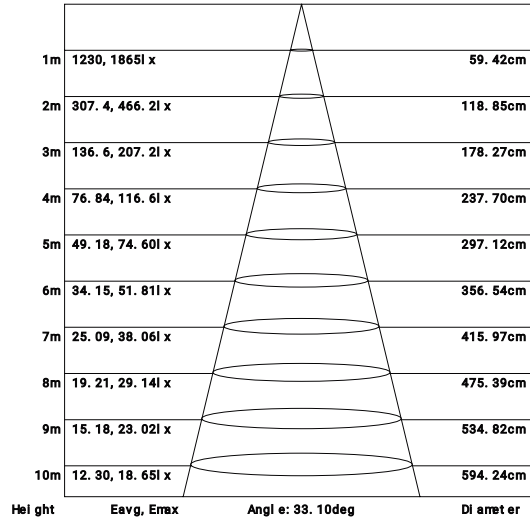

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



# MIDWAY

RECESSED COLLECTION



## 3.5" 45370 SQUARE REGRESSED GIMBAL

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\varnothing$  3 3/4".
- Fixture:  $\varnothing$  4 3/8" x 3 1/4"H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F)(-20°C~-40°C).

#### LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 705 lm | 747 lm | 812 lm | 848 lm | 847lm

#### CERTIFICATIONS




### ORDERING GUIDE

MODEL	FINISH
45370-021	Black
45370-014	White

### ACCESSORIES




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
	12W	Up to 848	CCT Selectable	TRIAC/ELV	90+	38°	15°



#### FINISHES



#### PRODUCT DIMENSIONS

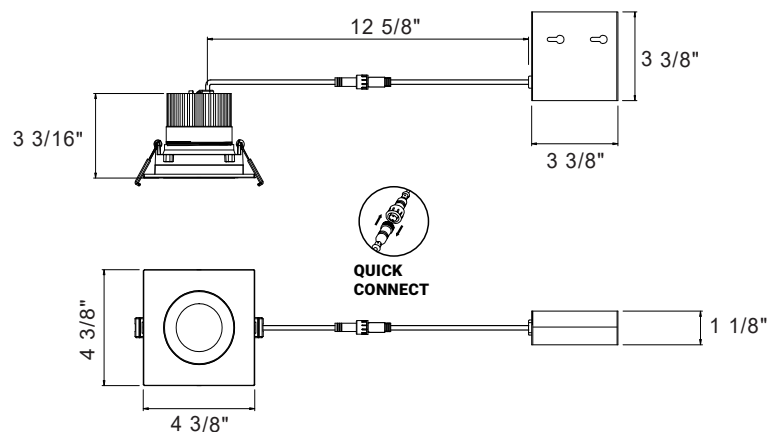




# MIDWAY


RECESSED COLLECTION




## Imperial

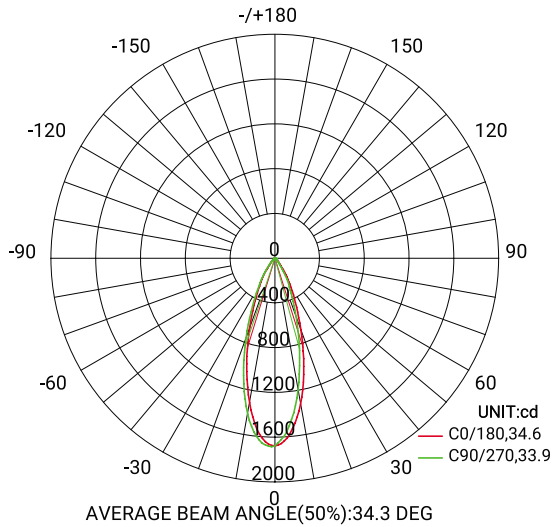


Flux out: 332.2 lm

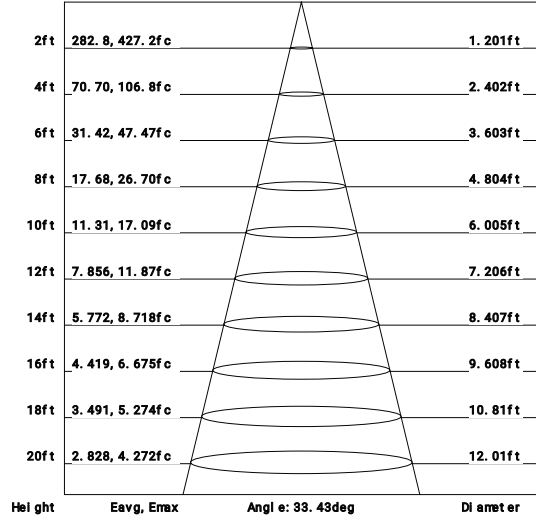

## Metrics

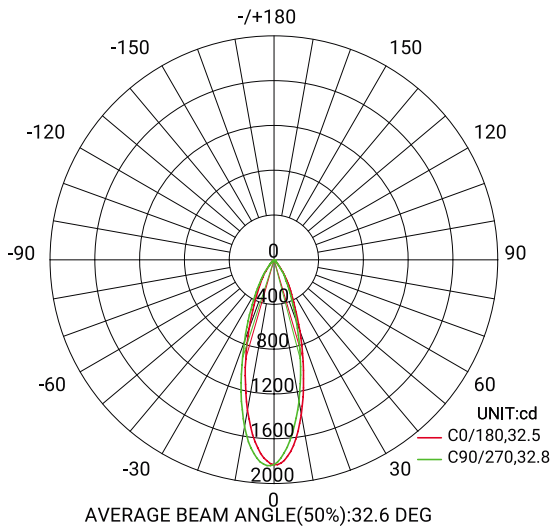

Flux out: 351.2 lm

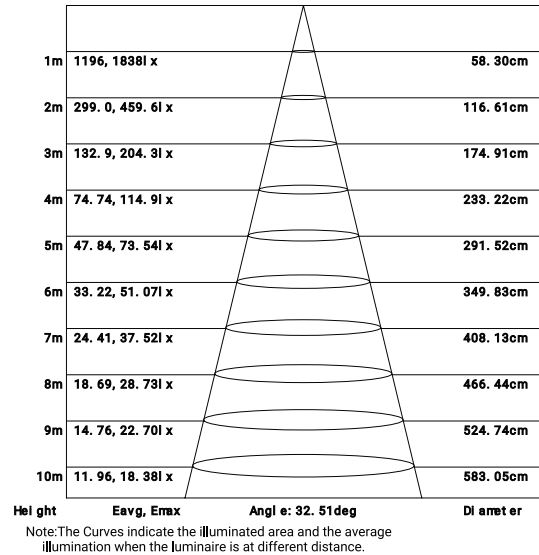





# MIDWAY

RECESSED COLLECTION



## 3.5" 45371 SQUARE FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\varnothing 3 \frac{3}{4}$ ".
- Fixture:  $\varnothing 4 \frac{1}{2}$ " x  $2 \frac{13}{16}$ "H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

#### LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 810 lm | 866 lm | 947 lm | 982 lm | 950 lm

#### CERTIFICATIONS




### ORDERING GUIDE

MODEL	FINISH
45371-028	Black
45371-011	White

### ACCESSORIES




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\varnothing 3 \frac{3}{4}$ "	12W	Up to 982	CCT Selectable	TRIAC/ELV	90+	38°	NO




#### FINISHES



#### PRODUCT DIMENSIONS

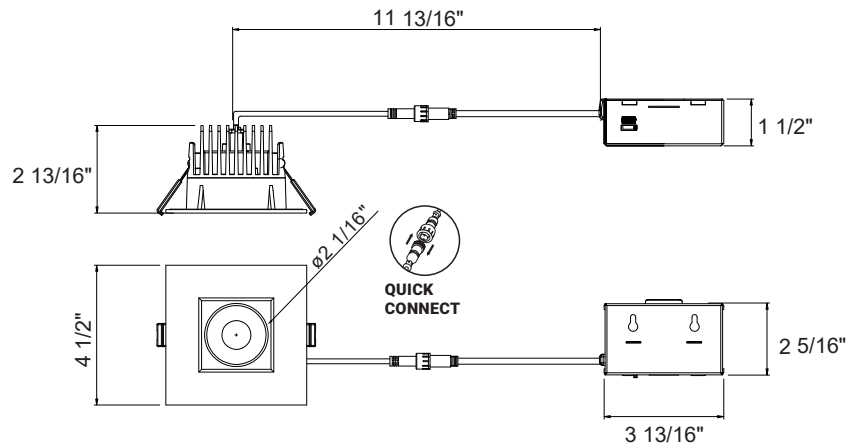





**MIDWAY**  
RECESSED COLLECTION



### Imperial

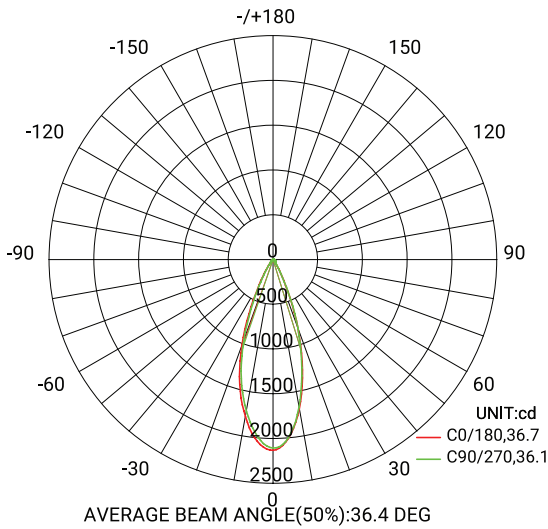


Flux out: 474.4 lm

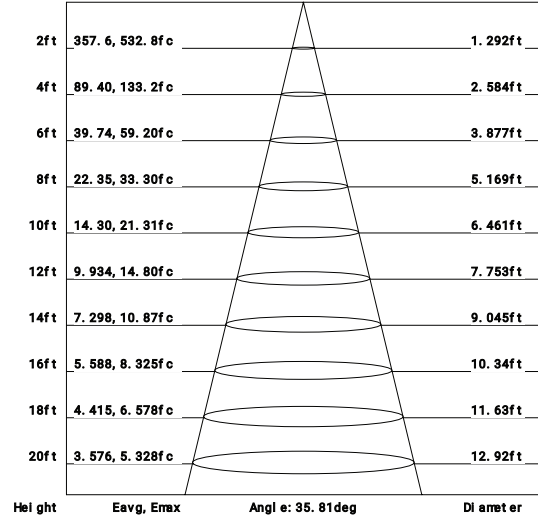


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### Metrics

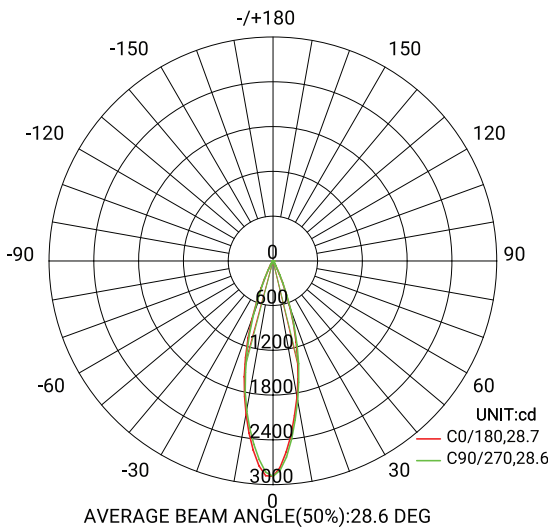

Flux out: 459.7 lm

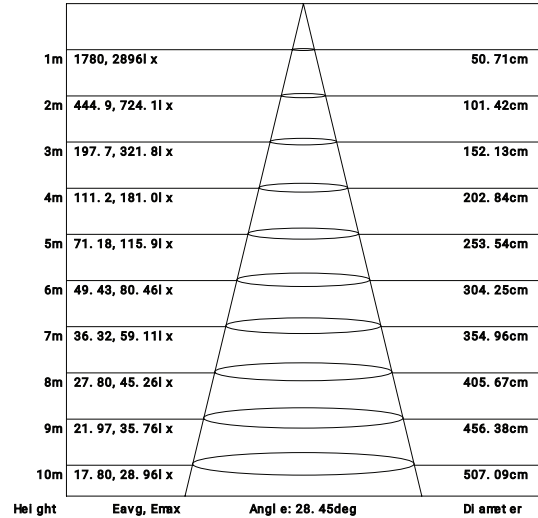

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.