

# AMIGO 26W TRIMLESS GIMBAL

35140



### LAMPING

- 1 x 26W Integrated LED TRIAC Dimming. For 0-10V and alternate dimming options consult Eurofase.
- **Beam angle:** 40°
- **Kelvin:** 3000K/3500K
- **Lumen per head:** 2560lm
- **CRI:** 90+

### ELECTRICAL

- Class 2 dimmable constant current driver (included)
- Driver box mates to fixture by 12" flexible BX cable
- Thermally protected
- **Input voltage:** 120V  
For 277V and 347V input options consult Eurofase

### HOUSING

- 18 gauge powder coated steel housing
- New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options)\*

### GIMBAL

- Adjustable direction suit different application requirement
- **Tilt:** 30°

### MESH PLATE

- Steel mesh plate (included)
- Perforated perimeter allows mud to bond to mounting surface leaving a seamless finish in the ceiling

### DIMENSIONS

- **Cut hole:** 6"L x 6"W
- **Fixture:** 5 3/4"L x 5 3/4"W x 5 1/4"H

### PHOTOMETRICS

- See pg 44

### CUSTOMIZATION

- For customization, please consult Eurofase

### SPECIFICATIONS


LED	WATTS	TOTAL LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	TILT
	26W	2560lm	3000K / 3500K	TRIAC	90+	40°	30°



### FINISHES



### PRODUCT DIMENSIONS

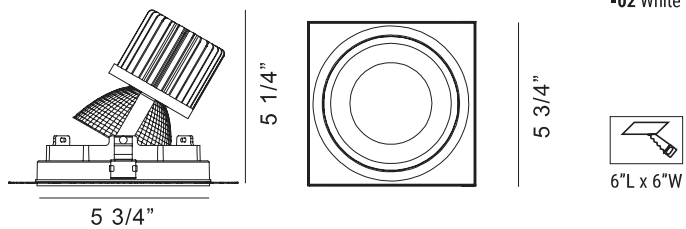

### ORDERING GUIDE

MODEL	KELVIN	FINISH
35140	-30 3000K	-01 Black
	-35 3500K	-02 White

EXAMPLE: 35140-30-01

### \*HOUSING OPTIONS (SOLD SEPARATELY):


Refer to page 123 for housing specification

36214-013 NEW CONSTRUCTION PLATE

36215-010 AIRTIGHT IC BOX



**Dimension** 12 3/4"L x 12 3/4"W x 1 3/8"H  
**Cut Hole** 6"L x 6"W



**Dimension** 12 3/4"L x 12 3/4"W x 1 1/2"H  
**Cut Hole** 6"L x 6"W