

AMIGO 26W TRIMLESS GIMBAL

35144



LAMPING

- 1 x 26W Integrated LED TRIAC Dimming. For 0-10V and alternate dimming options consult Eurofase.
- **Beam angle:** 40°
- **Kelvin:** 3000K/3500K
- **Lumen per head:** 2560lm
- **CRI:** 90+

ELECTRICAL

- Class 2 dimmable constant current driver (included)
- Driver box mates to fixture by 12" flexible BX cable
- Thermally protected
- **Input voltage:** 120V
For 277V and 347V input options consult Eurofase

HOUSING

- 18 gauge powder coated steel housing
- New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options)*

GIMBAL

- Adjustable direction suits different application requirements
- **Tilt:** 30°

MESH PLATE

- Steel mesh plate (included)
- Perforated perimeter allows mud to bond to mounting surface leaving a seamless finish in the ceiling

DIMENSIONS

- **Cut hole:** $\phi 6 \frac{1}{8}$ "
- **Fixture:** $\phi 5 \frac{3}{4}$ " x 5 1/4"H

PHOTOMETRICS

- See pg 44

CUSTOMIZATION



- For customization, please consult Eurofase

SPECIFICATIONS


LED	WATTS	TOTAL LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	TILT
	26W	2560lm	3000K / 3500K	TRIAC	90+	40°	30°



FINISHES



PRODUCT DIMENSIONS

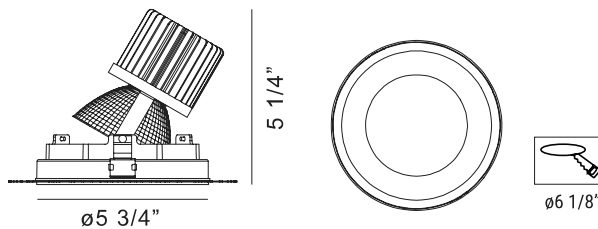

ORDERING GUIDE

MODEL	KELVIN	FINISH
35144	-30 3000K	-01 Black
	-35 3500K	-02 White

EXAMPLE: 35144-30-01

*HOUSING OPTIONS (SOLD SEPARATELY):


Refer to page 123 for housing specification

36217-014 NEW CONSTRUCTION PLATE

36218-011 AIRTIGHT IC BOX



Dimension 12 3/4"L x 12 3/4"W x 1 3/8"H
Cut Hole $\phi 6 \frac{1}{8}$ "



Dimension 12 3/4"L x 12 3/4"W x 1 1/2"H
Cut Hole $\phi 6 \frac{1}{8}$ "