



# 5" 45381 DOUBLE REGRESSED GIMBAL



**SPECIFICATIONS** 

Max Ceiling thickness 5/8".Approved for damp location.

• Cut hole: ø7 1/4" x 3 3/4". • Fixture: ø7 7/8" x 3 1/4"H.

enclosed in junction box.

• TRIAC and ELV dimming.

1 x 24W Integrated LED COB.Lumen maintenance 70% 50,000 hrs.

27K

• Beam angle: 38 degree.

IC

AIR TIGHT

**ORDERING GUIDE** 

120 V Input class 2 constant current dimmable driver

• Min operating temperature (-4°F~104°F)( -20°C~-40°C).

|30K

• Delivered Lumen: 1273 lm |1360 lm |1495 lm |1555 lm |1526lm

FINISH

Black White

|35K

40K

150K

JA8 COMPLIANT

IC Airtight Cast aluminum body.
Remodel application. C/W spring loaded clips.
Mates to driver box with quick connector.

LIGHT HOUSING

DIMENSIONS

ELECTRICAL

LIGHT MODULE

Kelvin (CCT):

CERTIFICATIONS

• CRI: 90+

(II)

MODEL

45381-027

45381-010

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT:			
TYPE:			
DATE:			
NOTES:			



# 2700K . 3000K . 3500K . 4000K . 5000K

	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
ø7 1/4" x 3 3/4	24W	Up to 1555	CCT Selectable	TRIAC/ELV	90+	38°	15°




13


# 027- Black

010- White

5/8"

PRODUCT DIMENSIONS





### ACCESSORIES

**45611-018 60"** 2 pin Connector



 45383-014
 07 3/8"x 3 3/4"

 2LT/3LT
 07 3/8"x 3 3/4"

 NEW CONSTRUCTION
 010 13/16"x 3 3/4"

 PLATE
 16 1/4"x 11 7/8"





NO IC BOX REQUIRED













**Metrics** 





Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.





# 45382 TRIPLE REGRESSED GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

ø10 7/8

3 3/4"

Driver

included

Box

WATTS

36W

LUMENS

Up to 2300

KELVIN

**CCT** Selectable

PROJECT:		
TYPE:		
DATE:		
NOTES:		



# 2700K . 3000K . 3500K . 4000K . 5000K

CRI

90+

DIMMABLE

TRIAC/ELV

3000k

3500k

4000K

SPECIFICATIONS
----------------

#### LIGHT HOUSING

- · IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole: ø10 7/8"x 3 3/4".
- Fixture: ø11 5/8" x 3 3/16"H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver
- enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)( -20°C~-40°C).

#### LIGHT MODULE


- 1 x 36W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- |30K |35K 40K Kelvin (CCT): 27K
- Delivered Lumen: 1914 lm |2025 lm |2202 lm |2300 lm |2280 lm

#### CERTIFICATIONS



### **ORDERING GUIDE**

MODEL	FINISH
45382-024	Black
45382-017	White

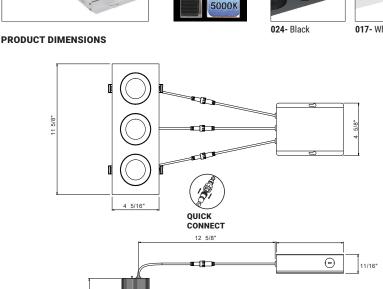

### ACCESSORIES

45611-018 60" 2 pin Connector



150K

45383-014 ø7 3/8"x 3 3/4" 2LT/3LT NEW CONSTRUCTION Ø10 13/16"x 3 3/4" PLATE 16 1/4" x 11 7/8"

3 3/16



NO IC BOX REOUIRED

# www.eurofase.com





BEAM

ANGLE

38°


ADJUSTABLE


15°

017- White











Metrics





Imperial