



MIDWAY

RECESSED COLLECTION



2"

45359 TRIMLESS ROUND FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. Mesh plate included.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: \varnothing 2 5/8".
- Fixture: \varnothing 3 9/16" x 5"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 882 lm | 948 lm | 1024 lm | 1053 lm | 1019 lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH
45359-026	Black
45359-019	White

ACCESSORIES




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
2 5/8"	15W	Up to 1053	CCT Selectable	TRIAC/ELV	90+	38°	NO



FINISHES



PRODUCT DIMENSIONS

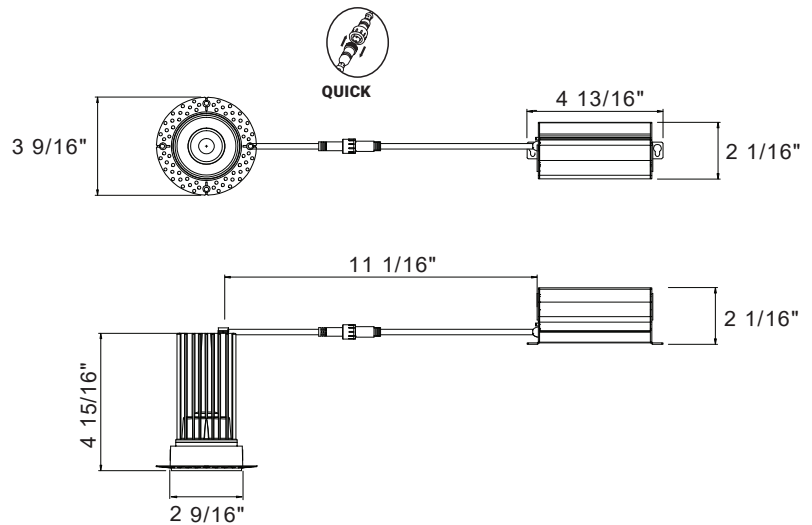





MIDWAY
RECESSED COLLECTION






PHOTOMETRICS

Imperial

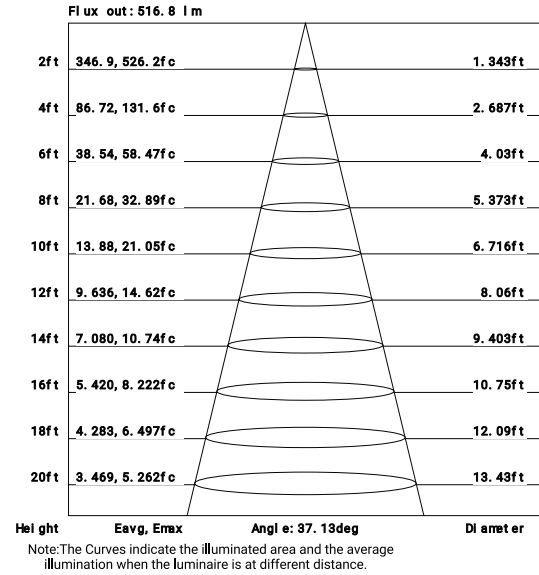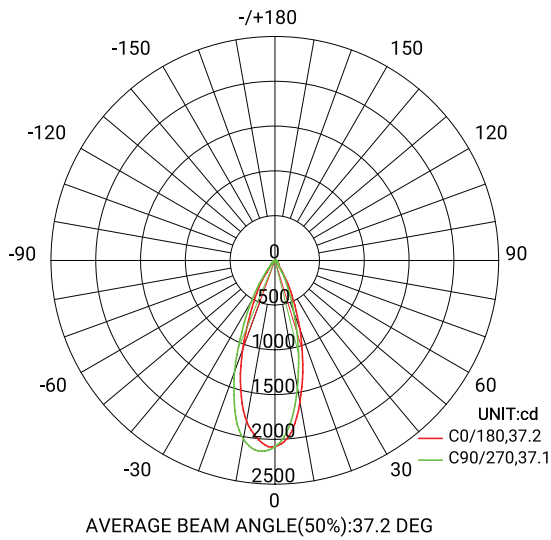

Metrics

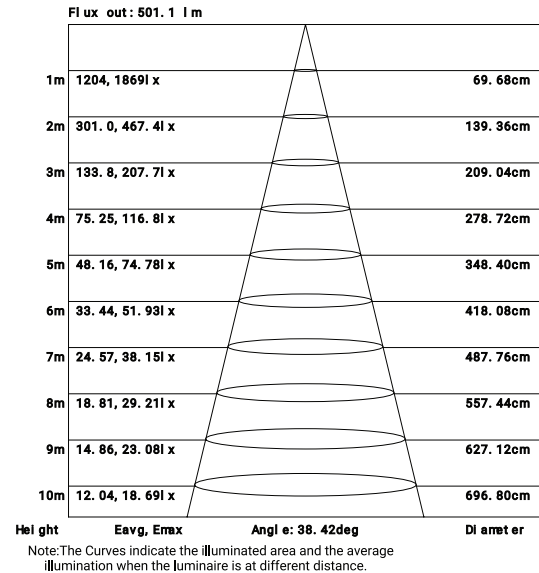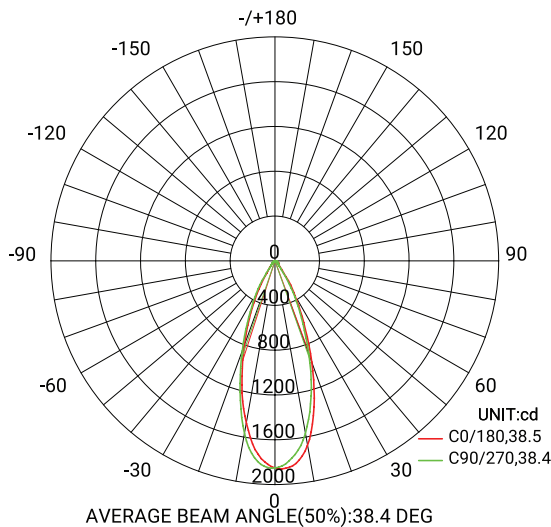



MIDWAY

RECESSED COLLECTION



2"

45361 HIGH OUTPUT ROUND FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: \varnothing 2 7/8".
- Fixture: \varnothing 3 1/8" x 5"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 887 lm | 942 lm | 1040 lm | 1077lm | 1048 lm


CERTIFICATIONS



	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
2 7/8"	15W	Up to 1077	CCT Selectable	TRIAC/ELV	90+	38°	NO



PRODUCT DIMENSIONS

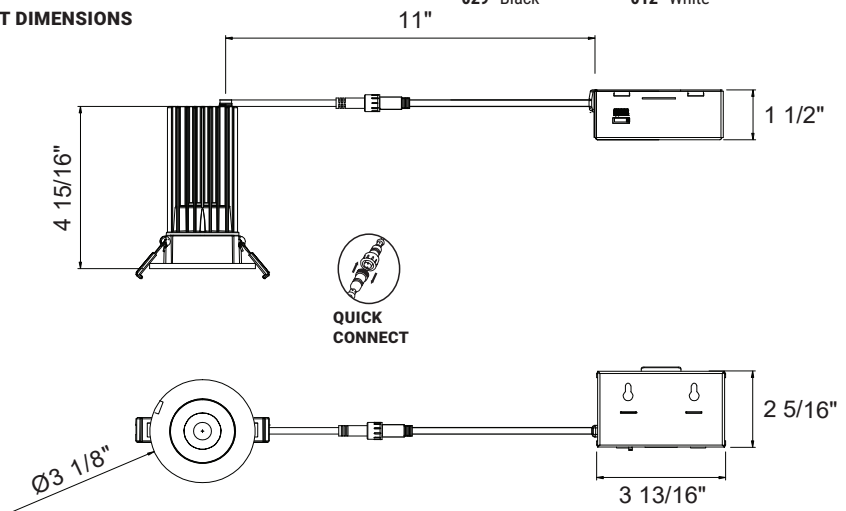

ORDERING GUIDE

MODEL	FINISH
45361-029	Black
45361-012	White

ACCESSORIES



www.eurofase.com

Tel: 905.695.2055 Fax: 905.695.2056
Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390

All features, functionality and other product specifications are subject to change without notice.




MIDWAY

RECESSED COLLECTION




PHOTOMETRICS

Imperial

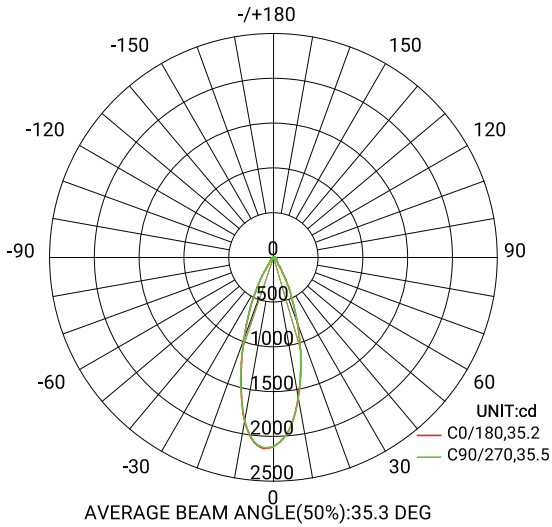


Flux out: 470.2 lm

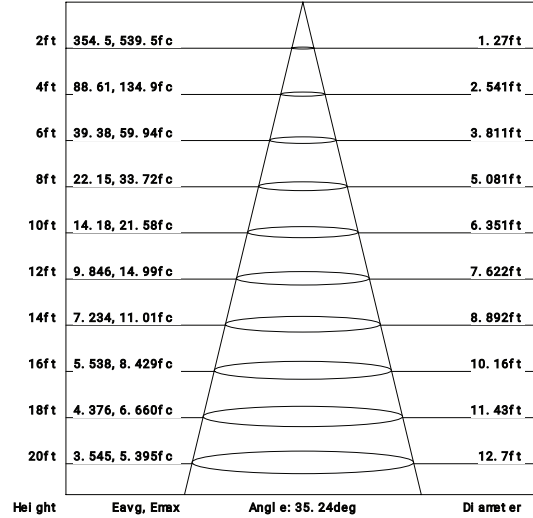


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

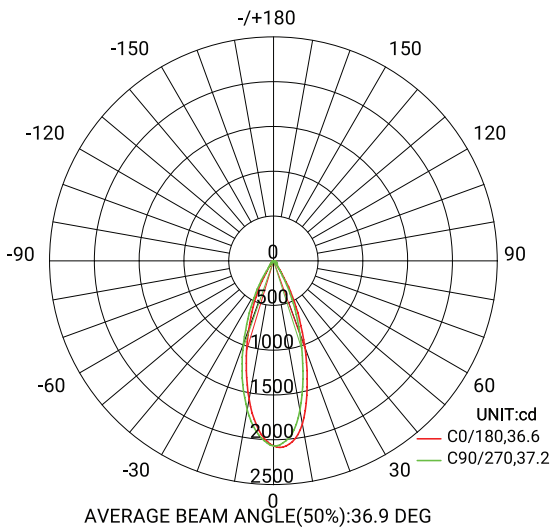

Flux out: 507.6 lm

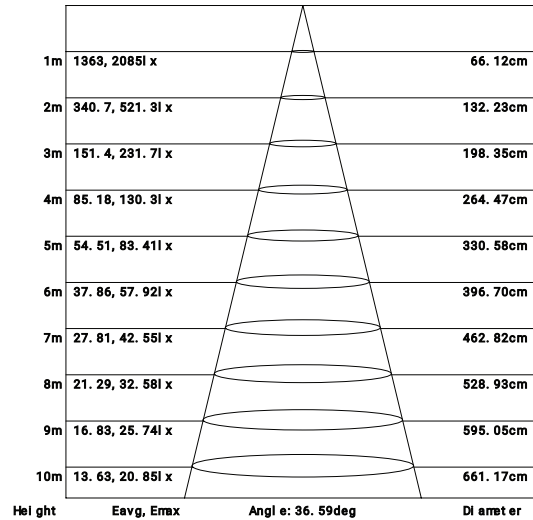

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



MIDWAY

RECESSED COLLECTION



2" 45362 HIGH OUTPUT SQUARE FIXED DOWNLIGHT




The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: \varnothing 2 7/8".
- Fixture: \varnothing 3 1/8" x 5 1/8"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 875 lm | 932 lm | 1027 lm | 1068 lm | 1041 lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH
45362-026	Black
45362-019	White


	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
2 7/8"	15W	Up to 1068	CCT Selectable	TRIAC/ELV	90+	38°	NO



PRODUCT DIMENSIONS




FINISHES




026- Black



019- White

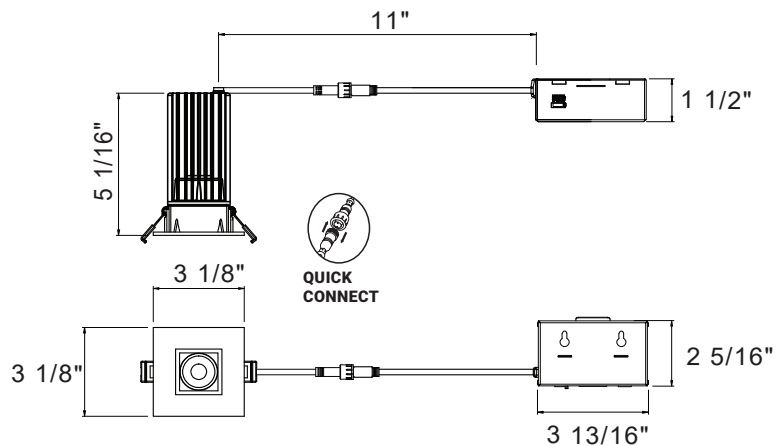

ACCESSORIES



45612-015
60"
3 pin Connector



45363-016
NEW CONSTRUCTION
SMASH PLATE
13 1/4" x 6 1/2"
 \varnothing 3/4"




NO IC BOX
REQUIRED




MIDWAY
RECESSED COLLECTION



Imperial

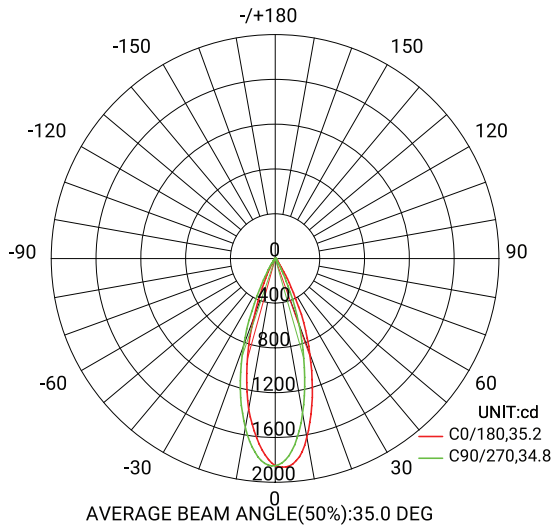


Flux out: 405.4 lm

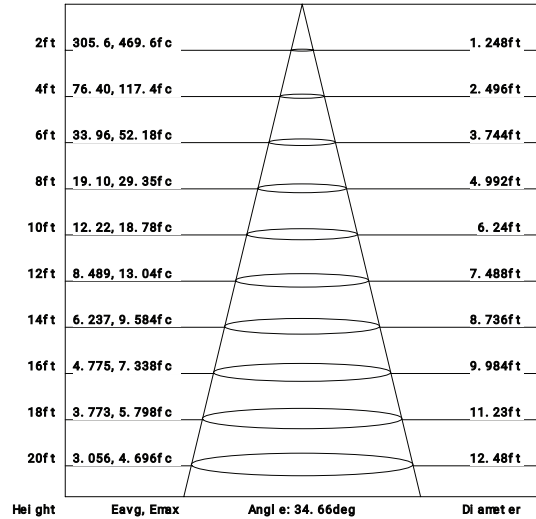


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

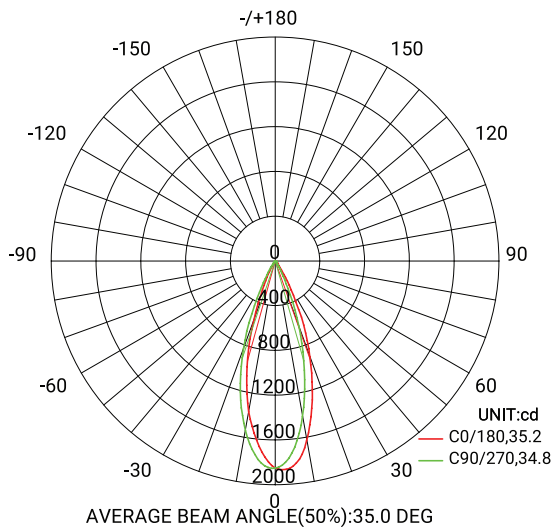

Flux out: 405.4 lm

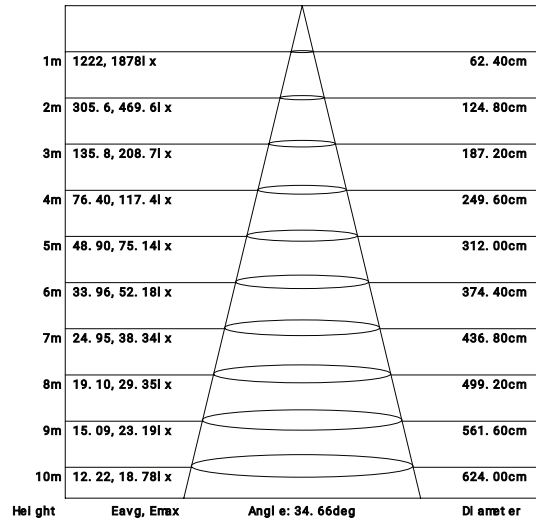

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



MIDWAY

RECESSED COLLECTION



3" 45367 ROUND GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: \varnothing 2 3/4".
- Fixture: \varnothing 3 3/8" x 1 13/16"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

LIGHT MODULE

- 1 x 8W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 542 lm | 578 lm | 620 lm | 633 lm | 629 lm


CERTIFICATIONS




ORDERING GUIDE

MODEL	FINISH
45367-021	Black
45367-014	White


ACCESSORIES




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 \varnothing 2 3/4"	8W	Up to 633	CCT Selectable	TRIAC/ELV	90+	38°	30°



FINISHES



PRODUCT DIMENSIONS

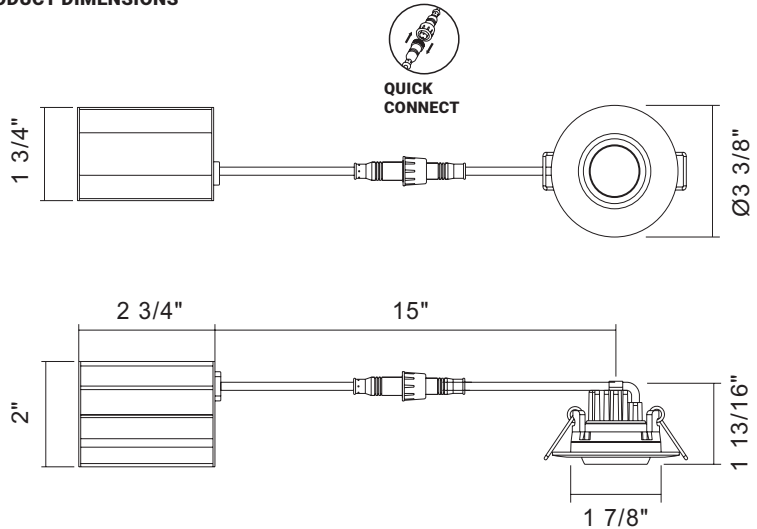





MIDWAY
RECESSED COLLECTION



Imperial

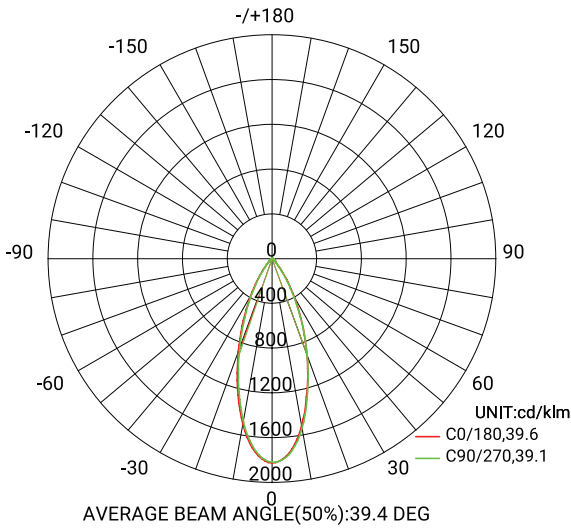


Flux out: 302.5 l m

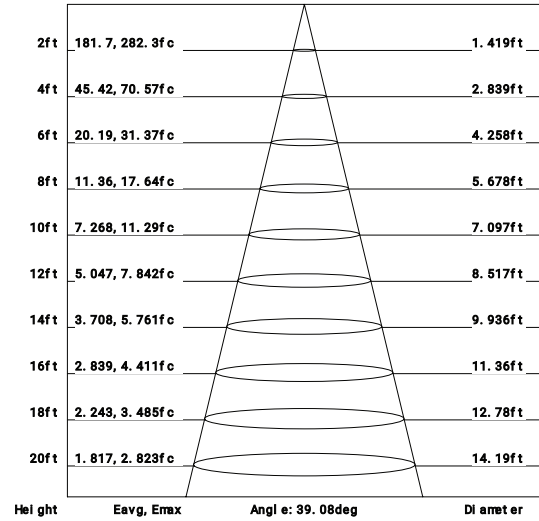


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

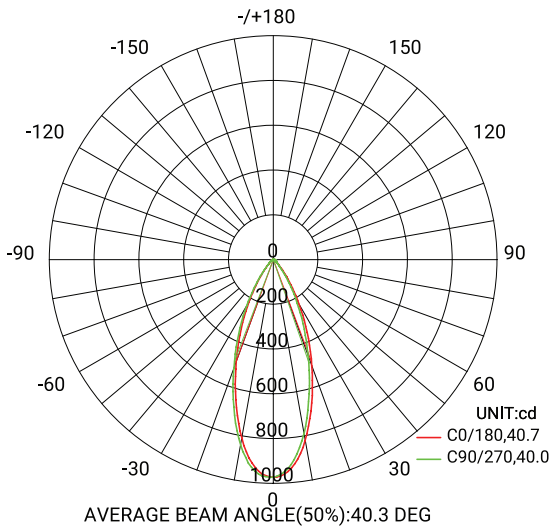

Flux out: 265.9 l m

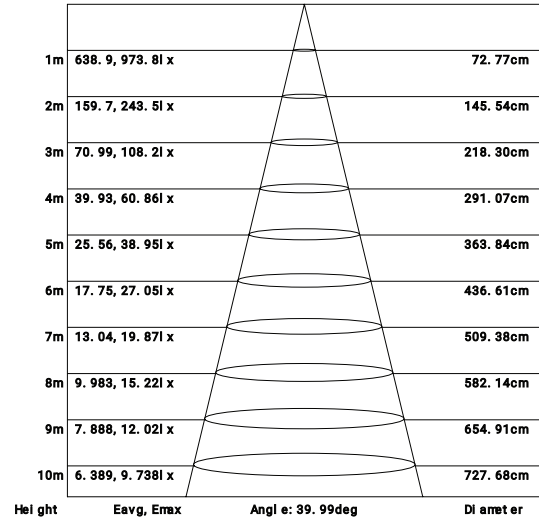

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.