



# MIDWAY

RECESSED COLLECTION



2"

## 45364 MINI ROUND REGRESSED GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\varnothing$ 2 1/8".
- Fixture:  $\varnothing$ 2 1/2" x 1 5/8"H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

#### LIGHT MODULE

- 1 x 5W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 372 lm | 402 lm | 412 lm | 415 lm | 408lm

#### CERTIFICATIONS



### ORDERING GUIDE

MODEL	FINISH
45364-020	Black
45364-013	White


### ACCESSORIES



$\varnothing$ 2 1/8"  
 $\varnothing$ 2 7/8"  
 $\varnothing$ 3 3/4"  
 $\varnothing$ 5 1/4"



**NO IC BOX  
REQUIRED**


	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\varnothing$ 2 1/8"	5W	Up to 415	CCT Selectable	TRIAC/ELV	90+	38°	30°




#### FINISHES



#### PRODUCT DIMENSIONS

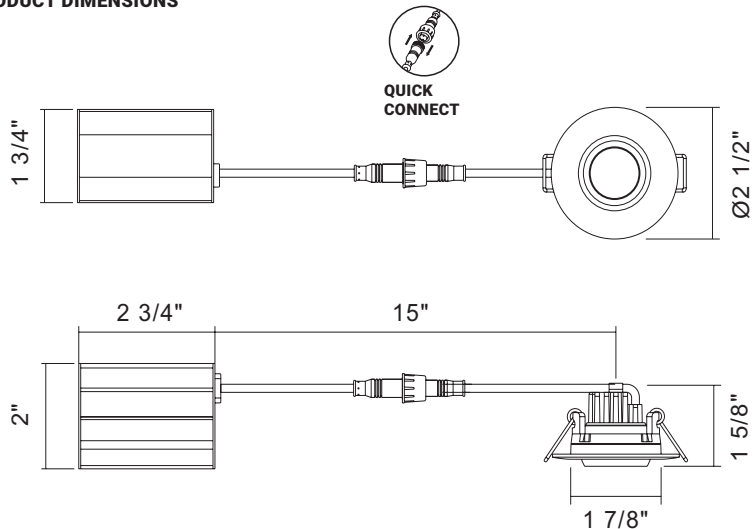




**MIDWAY**  
RECESSED COLLECTION




**PHOTOMETRICS**

Imperial

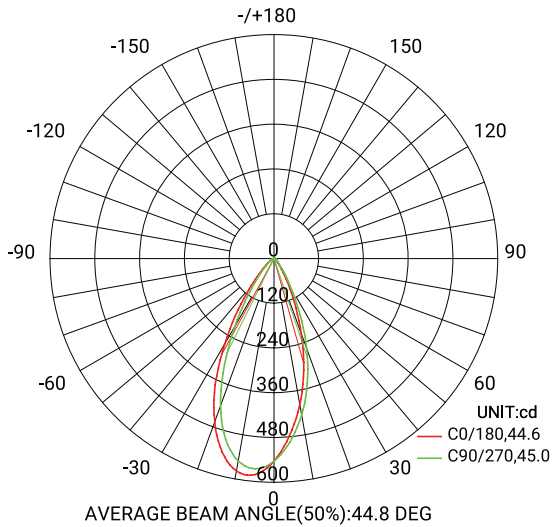


Flux out: 202.3 lm

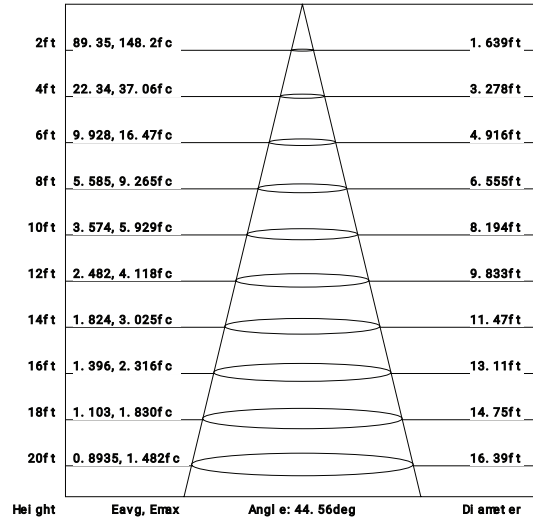


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

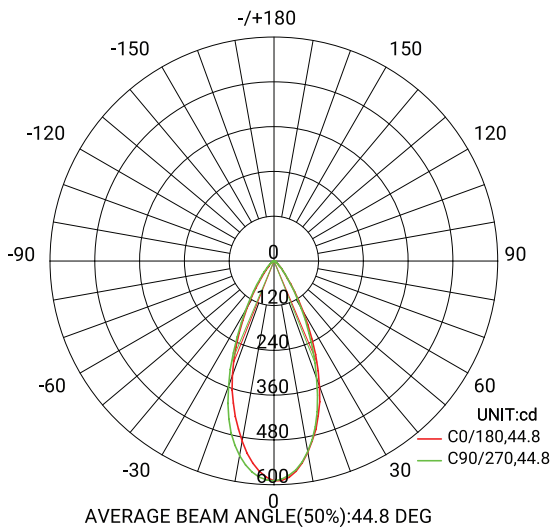

Flux out: 223.9 lm

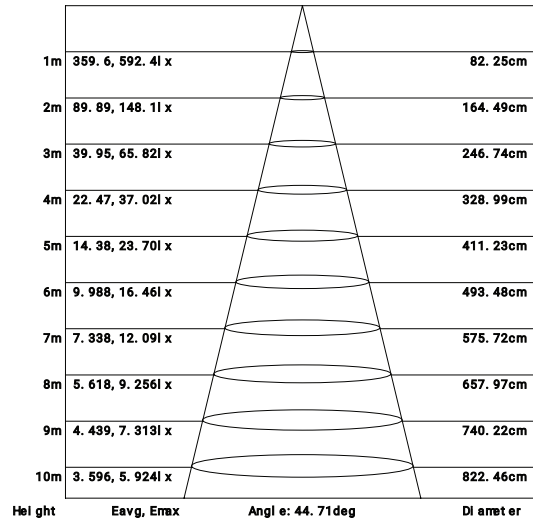

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



# MIDWAY

RECESSED COLLECTION



2"

## 45365 MINI SQUARE GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\varnothing$ 2 1/8".
- Fixture:  $\varnothing$ 2 1/2" x 1 1/2"H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

#### LIGHT MODULE

- 1 x 5W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 373 lm | 410 lm | 421 lm | 426 lm | 429 lm

#### CERTIFICATIONS



### ORDERING GUIDE


MODEL	FINISH
45365-027	Black
45365-010	White

### ACCESSORIES



- $\varnothing$ 2 1/8"
- $\varnothing$ 2 7/8"
- $\varnothing$ 3 3/4"
- $\varnothing$ 5 1/4"




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\varnothing$ 2 1/8"	5W	Up to 429	CCT Selectable	TRIAC/ELV	90+	38°	30°



#### FINISHES



#### PRODUCT DIMENSIONS

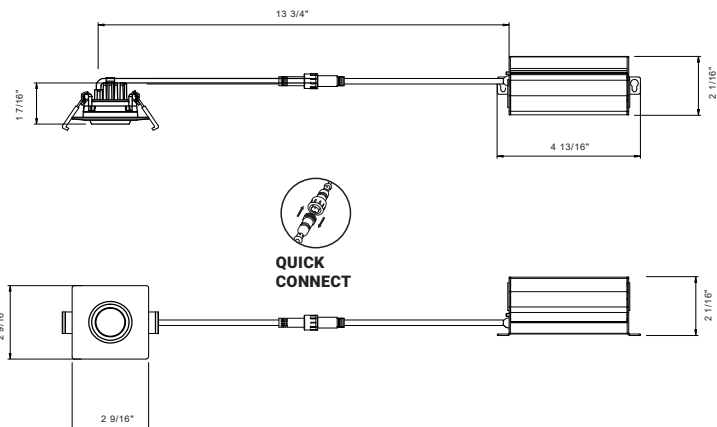




**MIDWAY**  
RECESSED COLLECTION




**PHOTOMETRICS**


Imperial

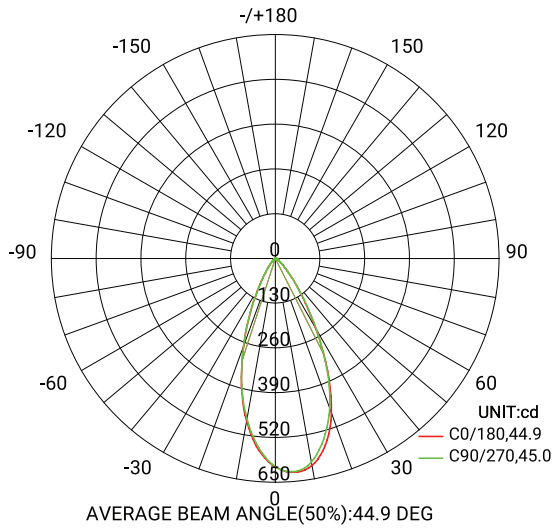


Flux out: 220.3 lm

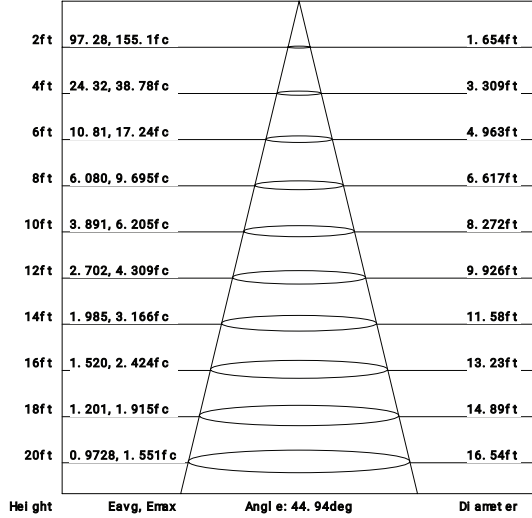

Metrics

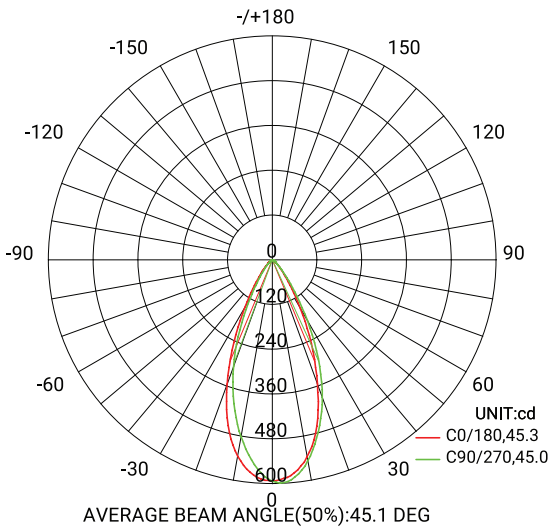

Flux out: 215.6 lm

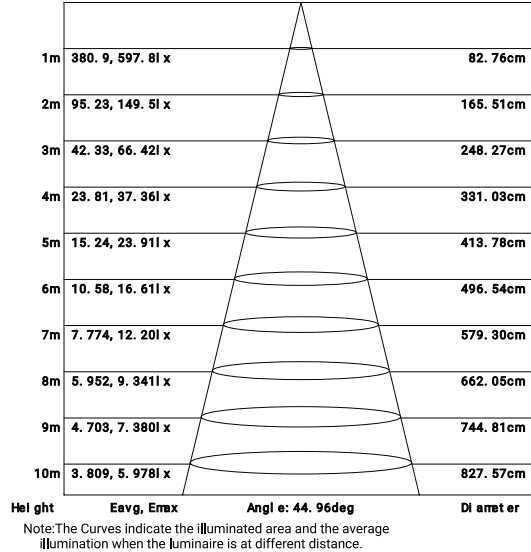

www.eurofase.com

Tel: 905.695.2055 Fax: 905.695.2056  
Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390

All features, functionality and other product specifications are subject to change without notice.