




ENIGMA®

FP2120MG Ceiling Fan

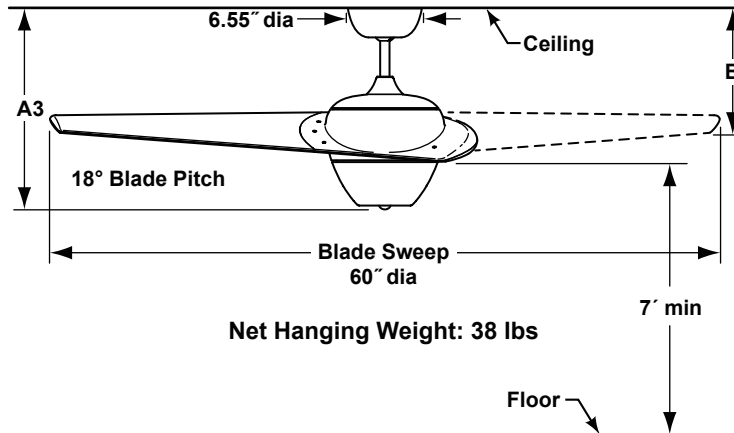

INSTALLATION REQUIREMENTS:

Ceiling fan must be secured to a structural member, such as a ceiling joist, capable of withstanding a load of at least 50 lbs. A $\frac{3}{8}$ " x 5" long lag bolt passes through loop in ceiling support cable, hanger bracket plate, and into wood structural member above.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 18 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

CONTROL OPTIONS:

TR24WH hand-held remote control with canopy-style receiver unit (RECAN34) is included. Push-button remote control has 3 speeds, downlight controls and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. See our catalog or visit www.fanimation.com for more information. Instructions are provided with each control.

LIGHTING OPTION:

Single built-in downlight socket uses PAR 30 short-neck, 75 watt max., halogen bulb (not included).

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30° . Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52° . Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

	A	B
Fan w/6" downrod	17.53"	11.02"
Fan w/12" downrod	23.53"	17.02"
Fan w/18" downrod	29.53"	23.02"
Fan w/24" downrod	35.53"	29.02"
Fan w/36" downrod	47.53"	41.02"
Fan w/48" downrod	59.53"	53.02"
Fan w/60" downrod	71.53"	65.02"
Fan w/72" downrod	83.53"	77.02"

Available Finishes

MG	Metro gray (Damp)
----	-------------------

***Custom Finishes are available by special order only.
Contact technical support for more information*

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	164	5796	114	0.43	51
Med	99	3208	143	0.34	22
Low	62	1693	157	0.26	11

*Minimum Pole Lengths for Sloped Ceilings

Degrees / Pitch	Minimum Pole Length	Blade Tip to Ceiling Dimension
18° / 4 - 12 pitch	12" (DR1-12**)	6½"
27° - 30° / 6 - 12 to 7 - 12	18" (DR1-18**)	4½"