




FILE#: E356487

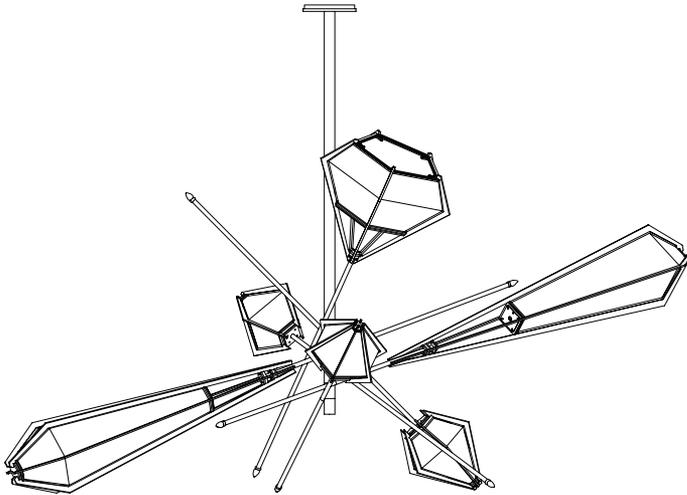

HARLOW

CHANDELIER

Installation Guide

- Suspended mounted only.
- Certified electrician recommended for electrical installation.
- Terminal Block not included. Installation may require advice from a qualified person.
- Junction box rated for minimum of 100lbs or structural blocking required to support fixture.
- For all LED fixtures, use only with class 2 power unit.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Contact manufacturer for service.

***IMPORTANT: Please provide email confirmation that your order and its related components have been received in their entirety and in good condition. Failure to do so within 7 days of delivery will waive all product warranties.**

GABRIEL SCOTT

EST 2012




Provided Supplies:

- Primary Stem Assembly
- Alphabetized glass-heads
- Alphabetized tails
- Provided bulbs(Incandescent fixtures only)
- Universal T-bar
- Installation Screws and Set-screws
- Allen Key for Set-screw
- LED Driver
- Spare LED chip


Required Tools:

- Screwdriver
- 4x 2-pole Wiring Terminals, screw or screwless, 12-18AWG (1.0-2.5mm²), rated for 600V, 15A - EX: WAGO 222-412
- Requires LED driver; Input: Local Line Voltage, Output 12Vdc SELV, 5A, Max 60 Watt, Class 2 LED Driver.

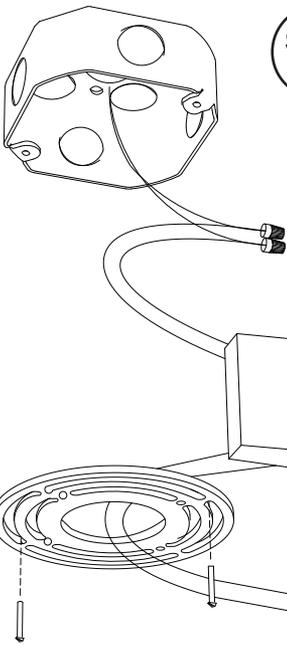

STEP
1

Shut-down associated electrical breaker and wire LED driver to power source using wiring terminals. Install universal canopy to junction box in ceiling.

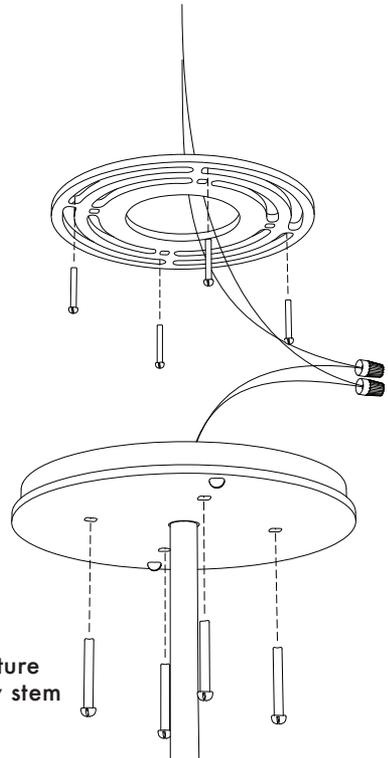


STEP
2

Using remaining terminals, connect the fixture wiring to the led driver. Install the primary stem assembly to the universal T-bar.

STEP
3

Attach each Glass-head to each corresponding rod on the primary stem assembly. Tighten Set-screws on both sides of each Glass-head to lock in place.

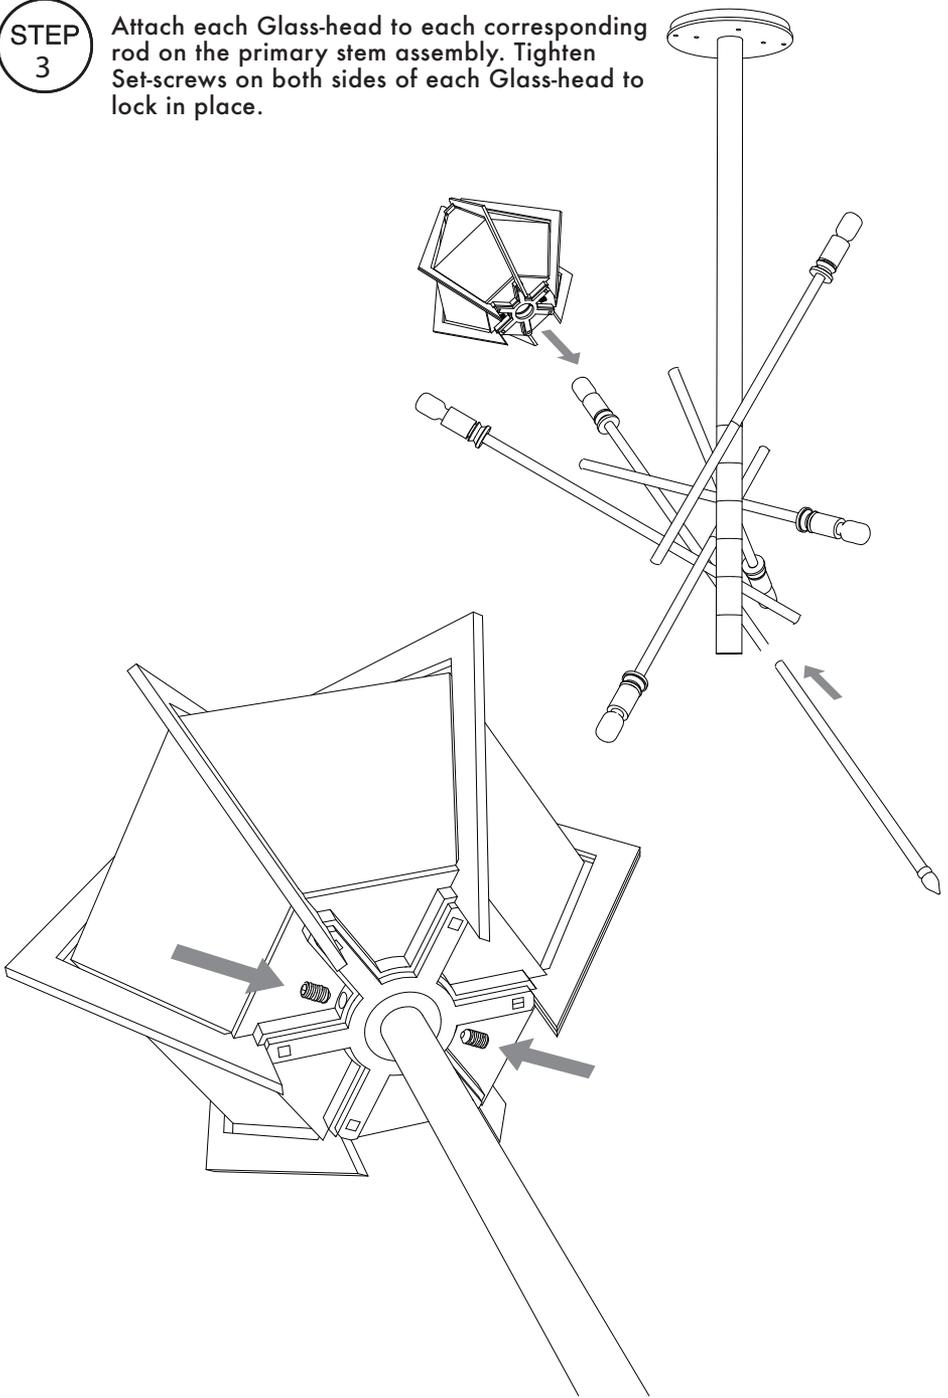

STEP
4

Finally, attach each alphabetized tail to the corresponding rod on the primary stem assembly.



e: info@GabrielScott.com

t: (646) 783-3770