
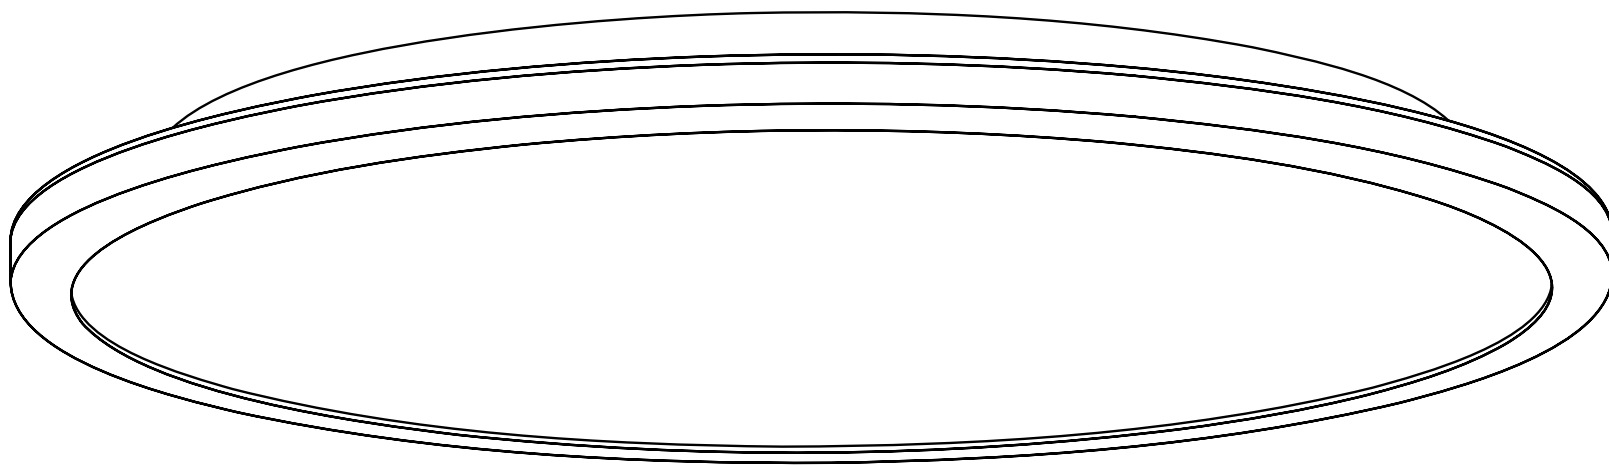


louis poulsen

MUNKEGAARD

Ø265, 460 & 525 LED

DESIGNED BY
ARNE JACOBSEN

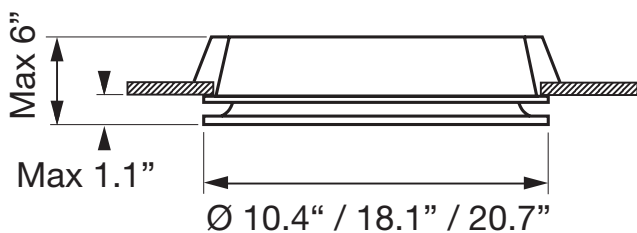

Light source Source lumineuse Fuente de luz	Voltage/frequency Voltage/frequence Tensión/frecuencia	Weight Poids Peso	Ingress protection Indice de protection Clase de protección
LED / 3000K 	120-277V	Max 8,6 Kg / 19 Lbs	IP 20 / Damp location IP 20 / Endroit humide IP 20 / Lugar húmedo


EN
Wipe off dust with a dry, soft cloth. Remove greasy spots etc. with a soft cloth dampened in lukewarm water (<122° F/ 50° C) with a mild detergent. Wipe immediately after with a dry cloth. Never use detergents containing abrasives and solvents.
Warning: Scouring powder and similar substances will scratch surfaces.
All installation is subject to local code and jurisdiction.
Consult a qualified electrician to ensure correct branch circuit conductor.
 Due to possibility of personal injury or property damage, always contact a qualified electrician for servicing or repair of this fixture. To avoid risk of electrical shock, personal injury, or death, disconnect power to fixture before servicing.

FR
Essuyez la poussière avec un chiffon sec et doux. Enlevez les points de saleté etc. avec un chiffon doux imprégné d’eau claire tiède(<122° F/ 50° C) et de détergent doux. Essuyer immédiatement avec un chiffon sec. Ne jamais utiliser de détergents contenant des abrasifs et des solvants.
Avertissement : La poudre à récurer et les substances similaires rayeront les surfaces.
Toute installation est soumise au code local et à la juridiction.
Consultez un électricien qualifié pour vous assurer que le conducteur du circuit de dérivation est correct.
 En raison de la possibilité de blessures corporelles ou de dommages matériels, contactez toujours un électricien qualifié pour l’entretien ou la réparation de ce luminaire. Pour éviter tout risque d’électrocution, de blessure corporelle ou de mort, débranchez l’alimentation du luminaire avant l’entretien.

ES
Limpiar con paño seco y suave. Quitar manchas de grasa y otras con paño suave humedecido con agua templada (<122° F/ 50° C) con detergente poco agresivo. Limpiar inmediatamente después con un paño seco. Nunca use detergents que contengan abrasivos y disolventes.
Advertencia: El polvo para fregar y sustancias similares rayarán las superficies.
Toda instalación está sujeta al código local y la jurisdicción.
Consulte a un electricista calificado para asegurarse de que el conductor del circuito derivado sea el correcto.
 Debido a la posibilidad de lesiones personales o daños a la propiedad, comuníquese siempre con un electricista calificado para el servicio o reparación de este dispositivo. Para evitar el riesgo de descarga eléctrica, lesiones personales o la muerte, desconecte la alimentación del dispositivo antes de repararlo.


LOUIS POULSEN USA INC.
36TH EAST 31ST STREET, 4TH FLOOR
NEW YORK, NEW YORK 10016
TEL. (332) 867 6060
CUSTOMERSERVICE@LOUISPOULSEN.COM
WWW.LOUISPOULSEN.COM






1

NOTE: IMAGES ARE REPRESENTATIVE ONLY. ACTUAL PRODUCT MAY VARY.
PREPARE FIXTURE FOR INSTALLATION.

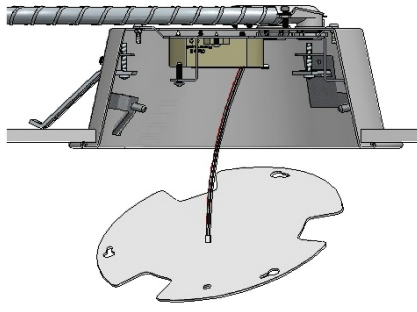


REMOVE LED BOARD BY
LOOSENING SCREWS
AND UN-PLUGGING
FROM DRIVER.

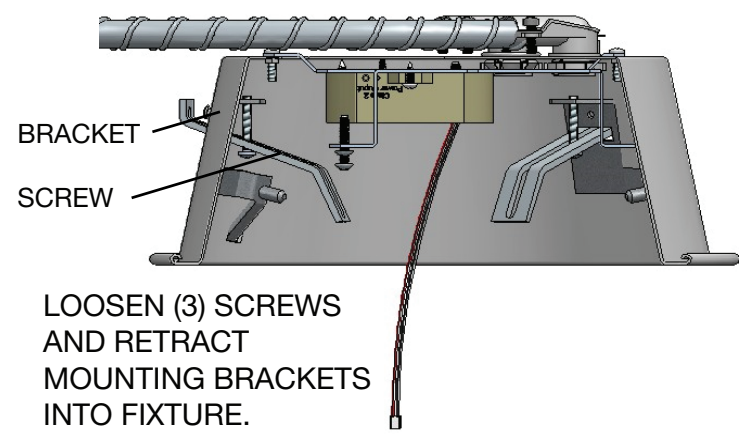

2


RAISE FIXTURE INTO CUTOUT. SECURE
BY EXTRACTING THE MOUNTING BRACKETS AND
TIGHTENING THEIR SCREWS.

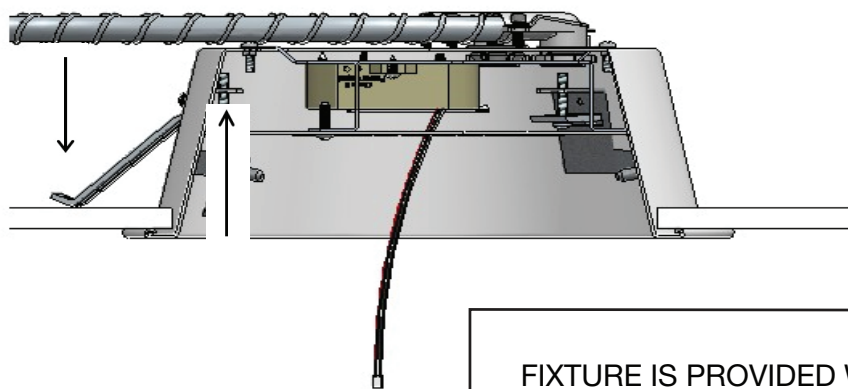

FIXTURE IS PROVIDED WITH A Y-TYPE CONDUIT CONNECTOR. INSTALL THIS
TO A STANDARD JUNCTION BOX. MAINTAIN SEPARATION OF LOW VOLTAGE
DIMMING CIRCUIT FROM LINE VOLTAGE AS REQUIRED BY NEC.

FOR POWER SUPPLY: BLACK WIRE = LINE VOLTAGE
WHITE = NEUTRAL GREEN = GROUND

3

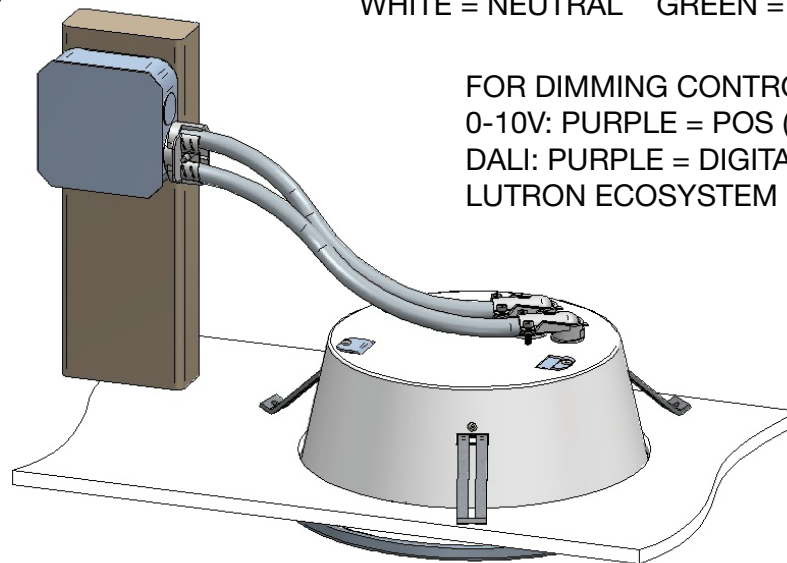

FOR DIMMING CONTROL:


0-10V: PURPLE = POS (+); PINK = NEG (-)

DALI: PURPLE = DIGITAL POS (+); PINK = DIGITAL NEG (-)


LUTRON ECOSYSTEM PURPLE = E1; PINK = E2

4

CONNECT WIRE PLUG TO LED BOARD. ASSEMBLY
LED BOARD TO FIXTURE BY PASSING SCREWS OR
THUMB NUTS THROUGH KEY HOLE SLOTS AND SECURE.

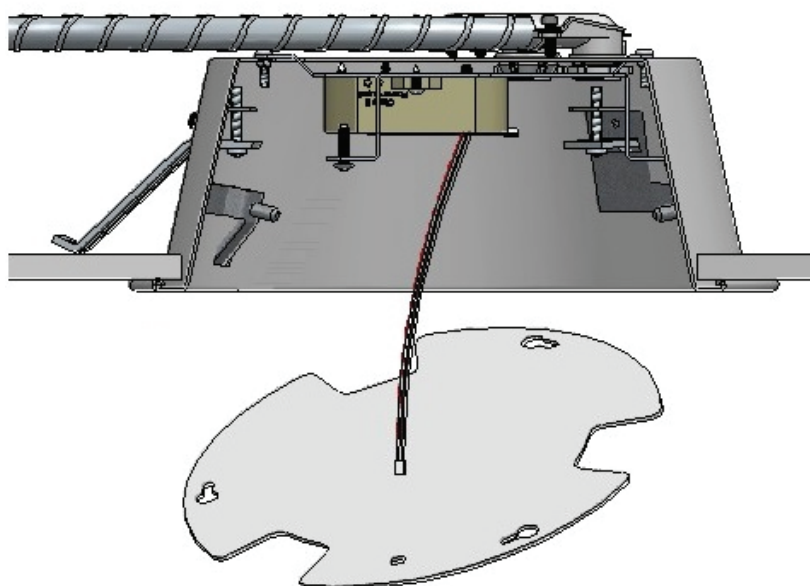

5

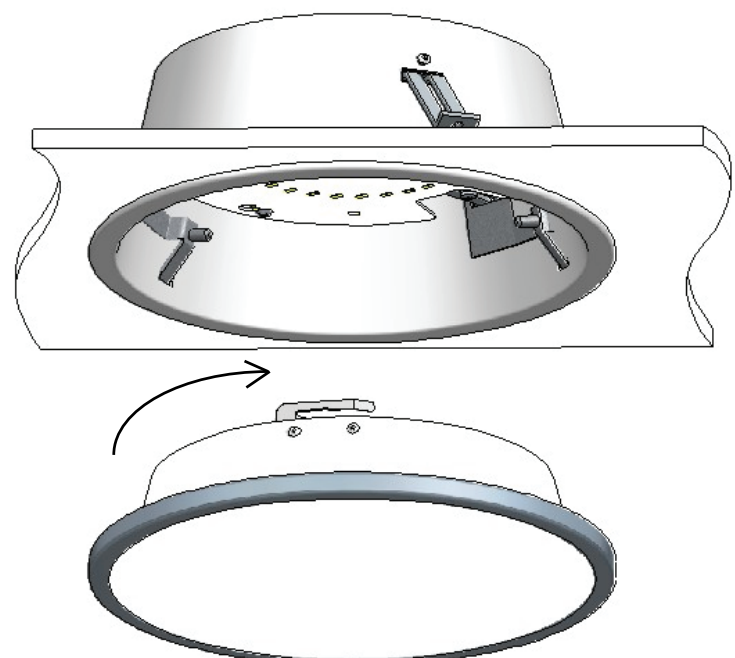

HANG TRIM FROM RIVETED CLIP INSIDE HOUSING.
INSTALL TRIM BY LIFTING UP INTO FIXTURE UNTIL IT
RESTS AGAINST THE PEGS. ROTATE UNTIL SPRING
CLIPS ARE FULLY ENGAGED ON THE PEGS.