


# ITEM: 125

INNOVATIONS LIGHTING  
CREATIVITY MEETS EVOLUTIONARY DESIGN®

DESIGN COPYRIGHT - 16/11/2022

ALL RIGHTS RESERVED AND MAY  
NOT BE DUPLICATED WITHOUT OUR  
WRITTEN PERMISSION

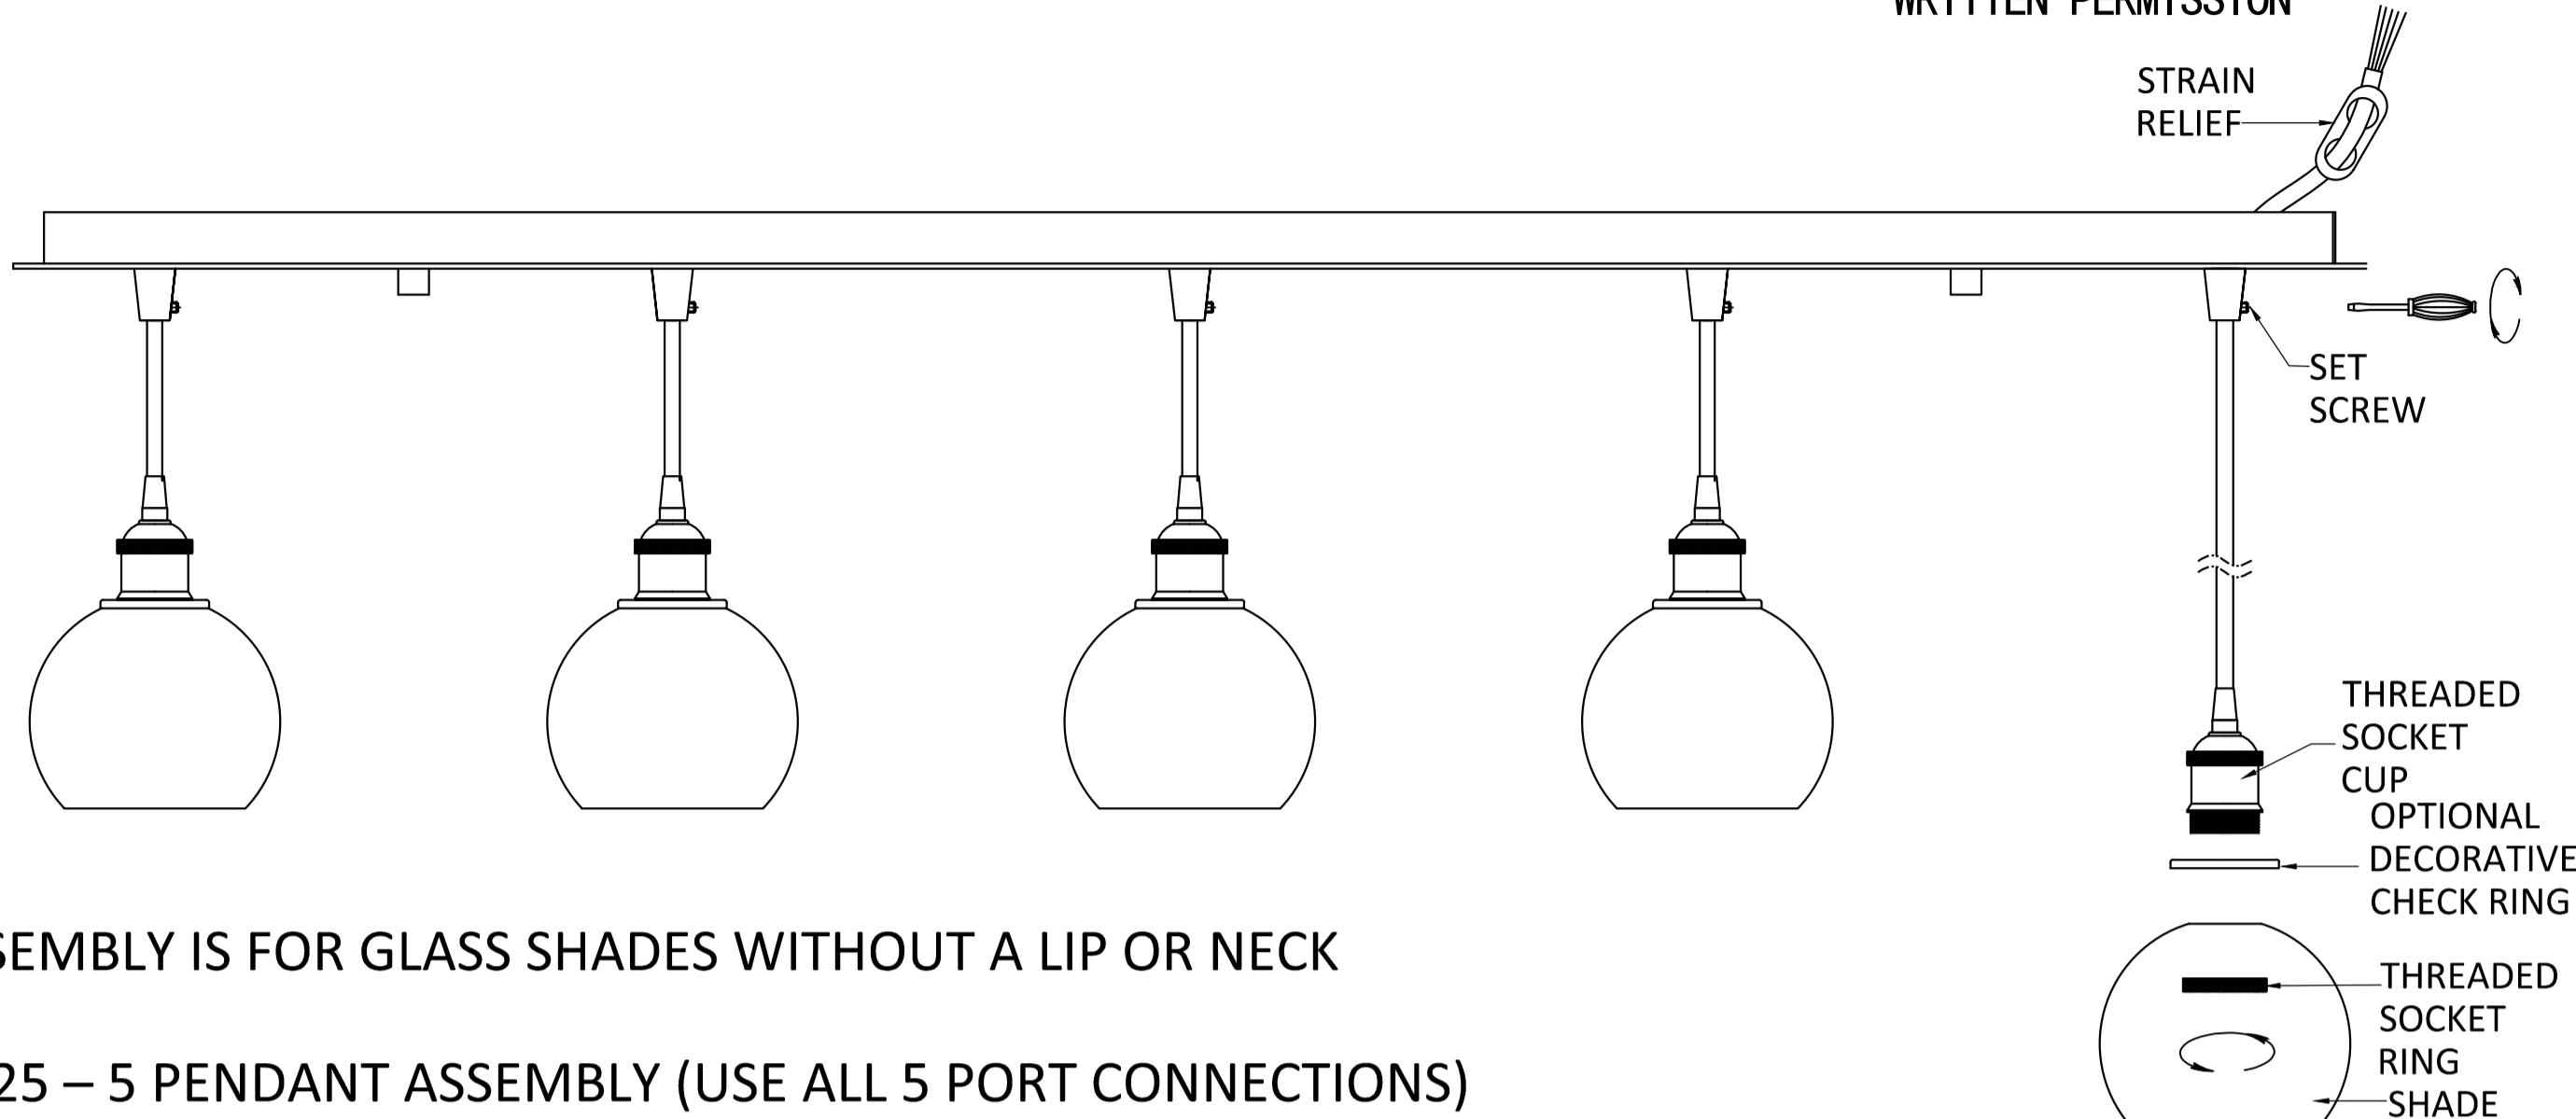

THIS ASSEMBLY IS FOR GLASS SHADES WITH A LIP OR NECK.

ITEM #125 – 5 PENDANT ASSEMBLY (USE ALL 5 PORT CONNECTIONS)


ITEM #123 – 3 PENDANT ASSEMBLY (USE ONLY 3 PORT CONNECTIONS)

(WHEN INSTALLING ONLY 3 PENDANTS PLUG THE (2) UNUSED PORTS USING THE BLANK PLUGS SUPPLIED IN PARTS PACKAGE TO REPLACE THE PORTS)


FEED THE CORDS THROUGH THE CANOPY PORTS AND TIGHTEN WITH THE TINY SET SCREWS IN THE PORTS, THEN PUT THE PLASTIC STRAIN RELIEFS ON THE CORDS DIRECTLY ABOVE THE CANOPY (TO KEEP THE CORDS FROM SLIPPING THROUGH THE PORTS). ATTACH THE HR-314B HOLDER ONTO THE THREADED SOCKET CUP USING THREADED SOCKET RING, THEN SLIDE THE SHADE INTO THE HR-314B HOLDER AND TIGHTEN EVENLY USING THE (3) THUMB SCREWS TO HOLD SHADE IN PLACE.

\*DO NOT OVER TIGHTEN (3) THUMB SCREWS TO AVOID BREAKING THE GLASS SHADE.

GLASS SHADES, METAL SHADES & BULBS ARE OPTIONAL

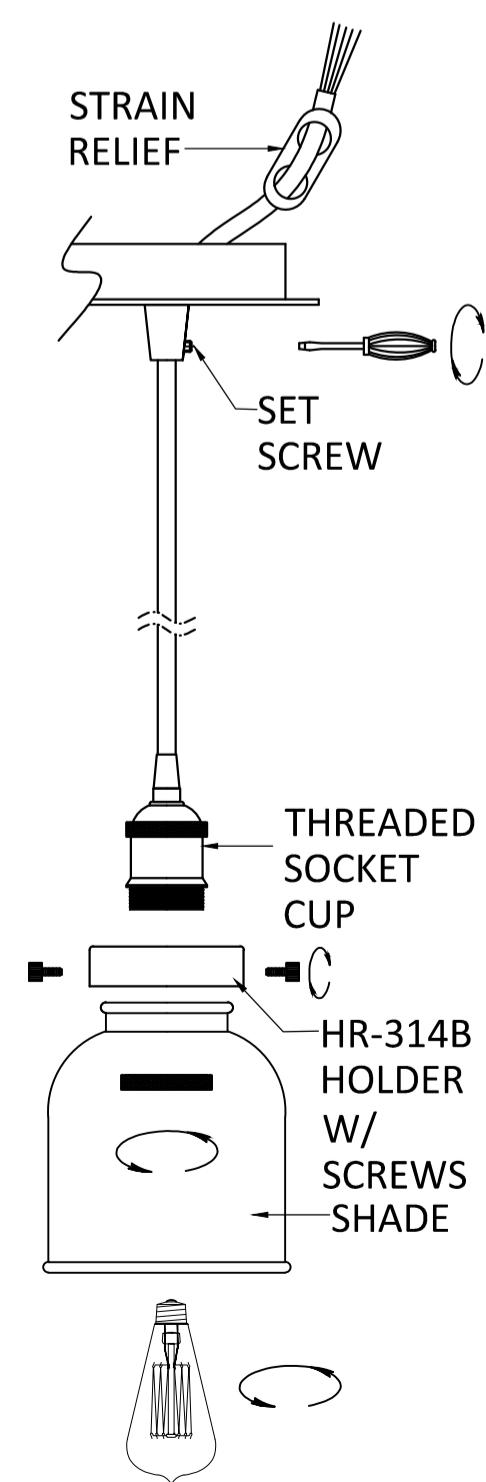

# STANDARD MOUNTING PLATE INSTALLATION INSTRUCTIONS

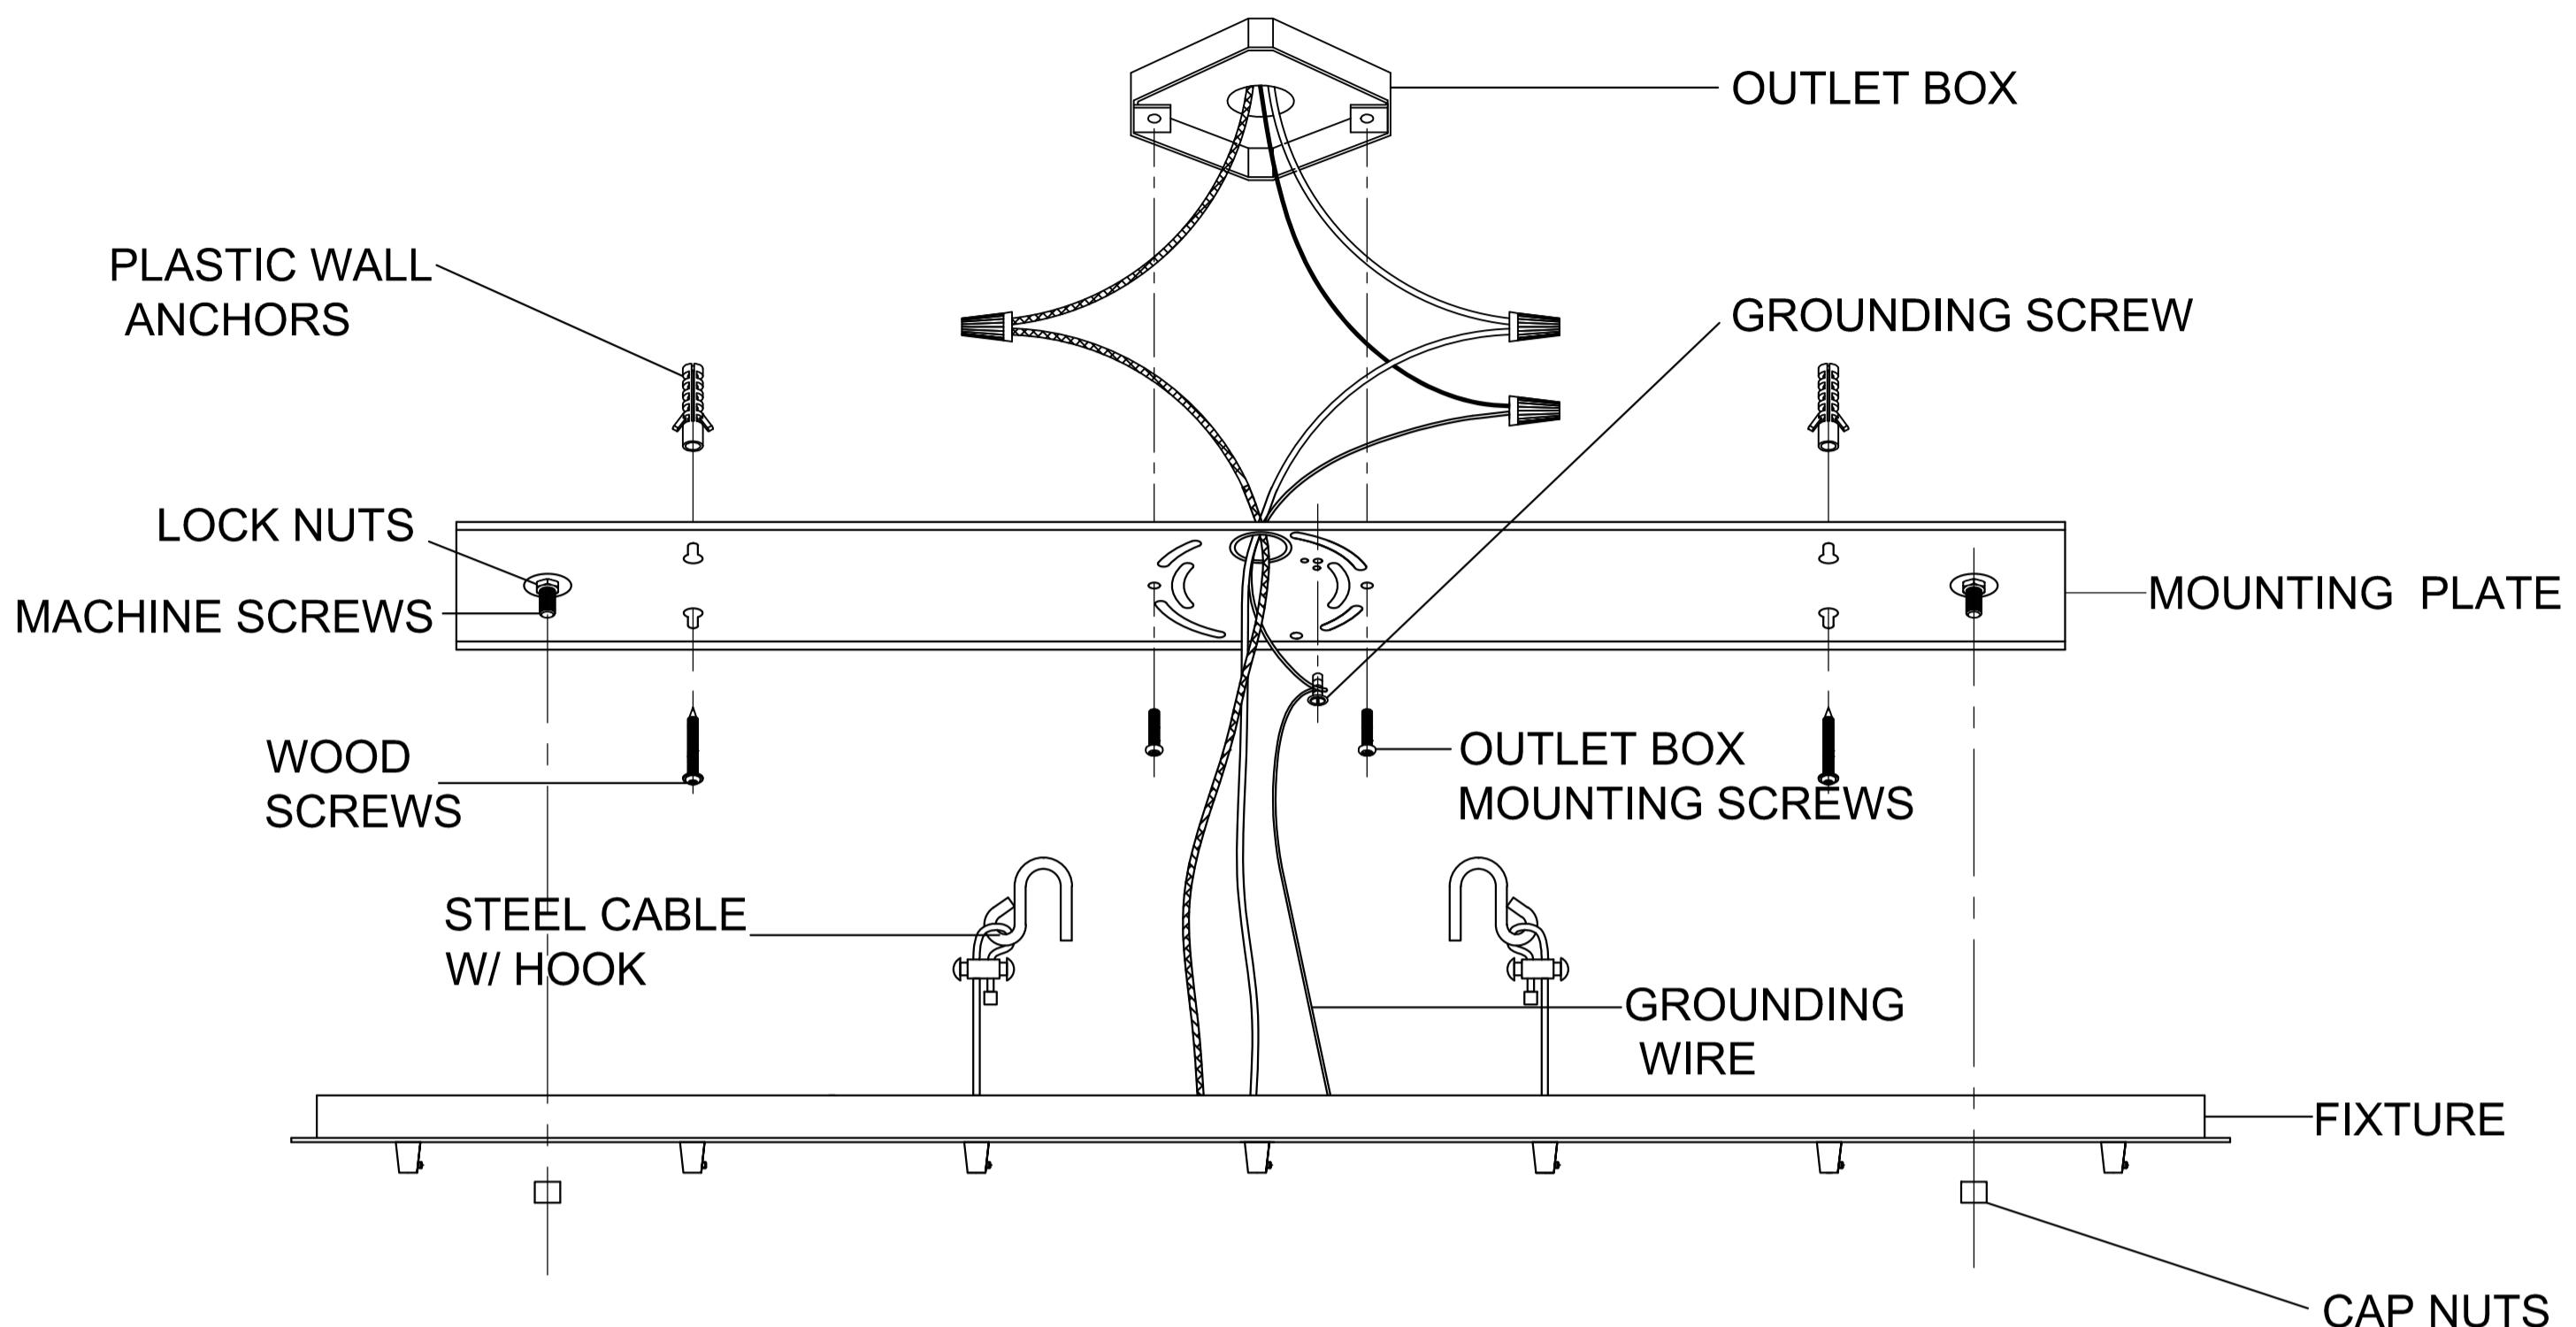

## CAUTION: DISCONNECT POWER DURING INSTALLATION

- 1.) If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
- 2.) Fasten the mounting plate to the outlet box using the two screws supplied with the outlet box and plastic anchors, wood screws under ceiling
- 3.) In order to make the wire connections easily, please hook the steel cables from the canopy onto the mounting holes of the mounting plate
- 4.) Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.
- 5.) Grounding instructions:
  - A.) The mounting plate is provided with a green ground screw and two raised dimples. Wrap ground wire from outlet box around green ground screw and tighten.

- B.) On fixtures where mounting plate is provided with a green ground wire attached. Connect mounting plate ground wire to ground wire from outlet box with wire connector (not provided). If fixture is provided with ground wire. Connect fixture ground wire to ground wire from outlet box with wire connector (not provided). After following the above steps. Never connect ground wire to black or white power supply wires.
- 6.) To make electrical connections: Connect the white wire(s) from the fixture to the white wire of this outlet box. Connect the black wire(s) from the fixture to the black wire of the outlet box. NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/or have a silver conductor.
- 7.) Place canopy against mounting surface allowing the machine screws to pass through the fixture canopy. Secure with cap nuts.