

INSTALLATION GUIDE FOR BRADN1714BRG, BRADG1714BRG, BRADB1714BRG, BRADK1714BRG, BRADW1714BRG, BRADE1714BRG, BRADN1814BRG, BRADG1814BRG, BRADB1814BRG, BRADK1814BRG, BRADW1814BRG and BRADE1814BRG

SAFETY INFORMATION

Released Date: 2025-09-22

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

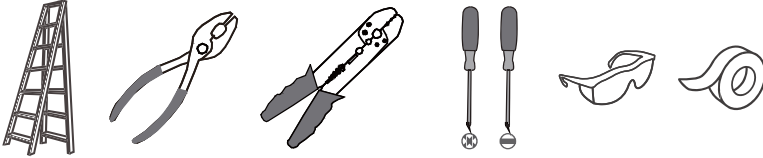


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quezel.com.

PACKAGE CONTENTS

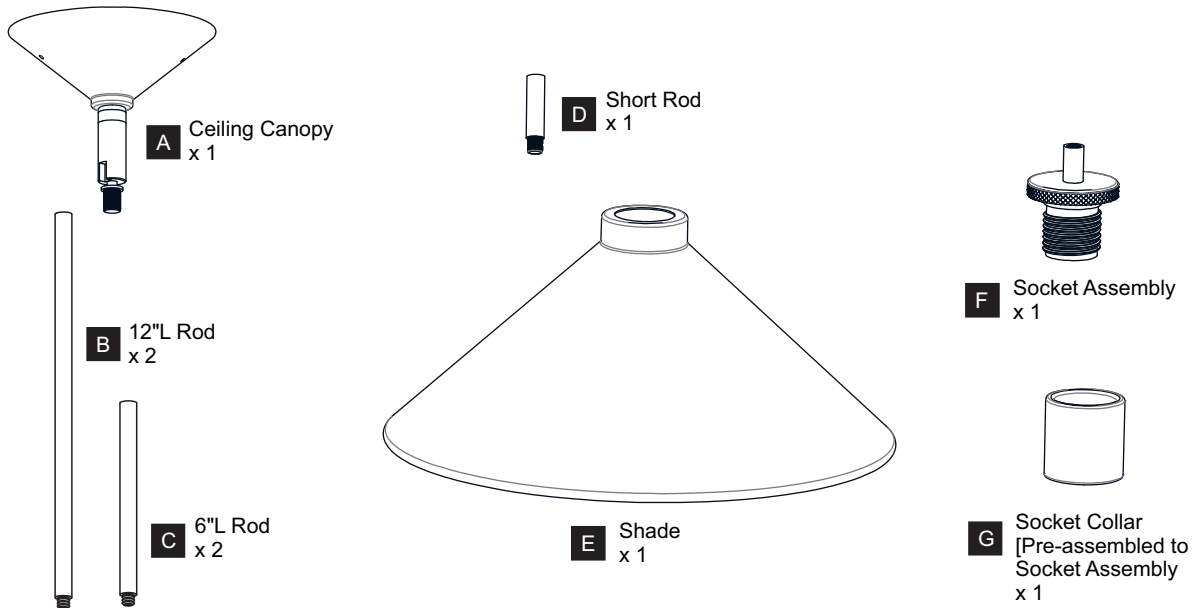

MOUNTING HARDWARE

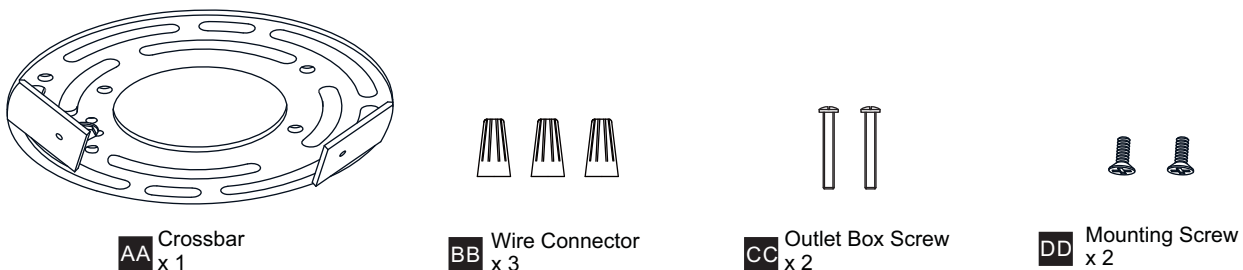


INSTALLATION


IMPORTANT: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

OPTION 1: SEMI-FLUSH - BRADN1714BRG, BRADG1714BRG, BRADB1714BRG, BRADK1714BRG, BRADW1714BRG and BRADE1714BRG

* Set aside (2) 6"L Rods and (2) 12"L Rods and swivel, since they are not required for the semi-flush installation.




1 Remove Swivel



Set aside Swivel


2 Install Ceiling Canopy to Socket Assembly

* Cut the supply wires leaving approximately 8" of wire extending from the ceiling canopy after assembly.

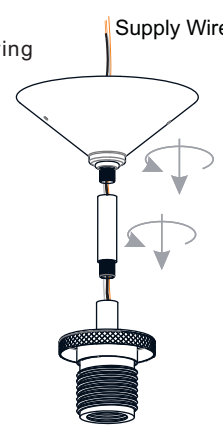


Supply Wire

3 Install Crossbar

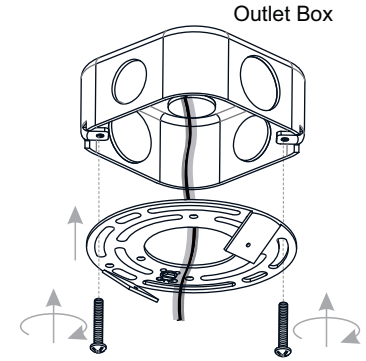

Outlet Box

4 Wiring

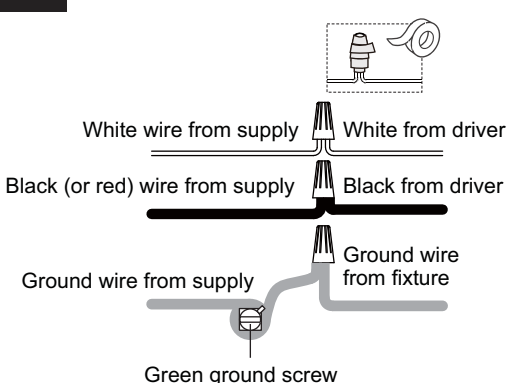


White wire from supply White from driver

Black (or red) wire from supply Black from driver


Ground wire from supply Ground wire from fixture

Green ground screw

5 Install Ceiling Canopy to Crossbar

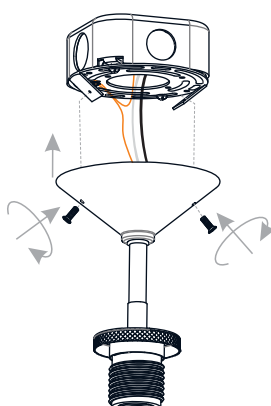


6 Install Shade to Socket Assembly

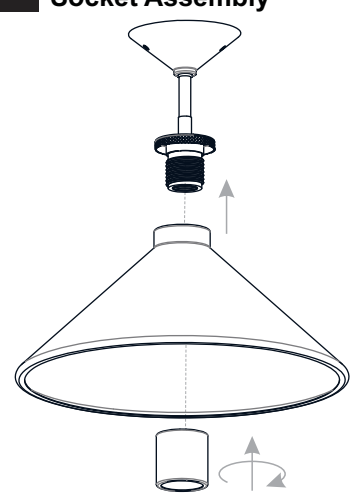


7 Install Bulb

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.


Recommended Bulb type (not included):



BULB BASE TYPE
Medium (E26)



BULB TYPE
TYPE A

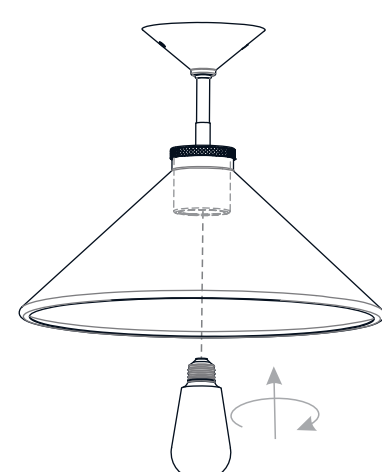


Your installation is now complete! Restore electricity and save this sheet for future reference.

INSTALLATION


OPTION 2: PENDANT - BRADN1814BRG, BRADG1814BRG, BRADB1814BRG, BRADK1814BRG, BRADW1814BRG and BRADE1814BRG

1 Install Rods

Optional Rods:
8 Feet Ceiling:
(2) 12"L Rods.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.

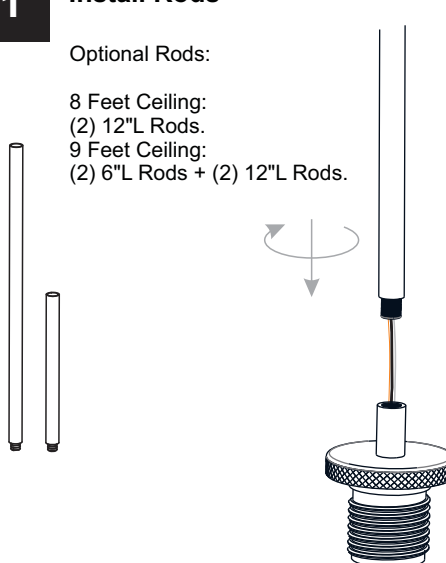


2 Install Ceiling Canopy to Upper Rod

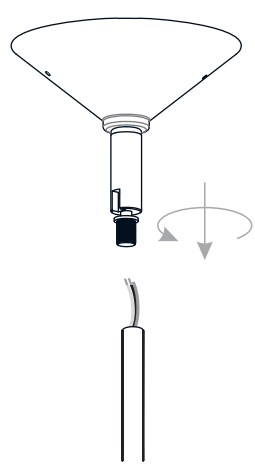


3 Install Crossbar

Outlet Box

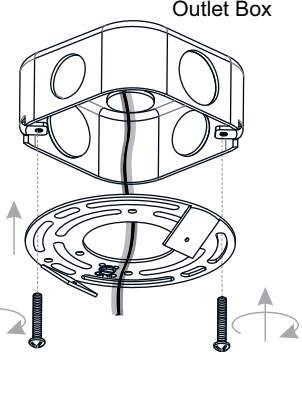


4 Wiring

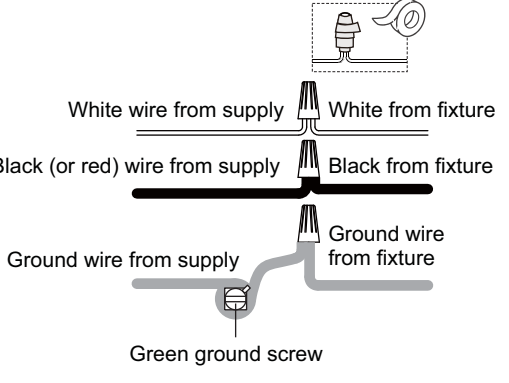


White wire from supply White from fixture
Black (or red) wire from supply Black from fixture
Ground wire from supply Ground wire from fixture
Green ground screw

5 Install Ceiling Canopy to Crossbar

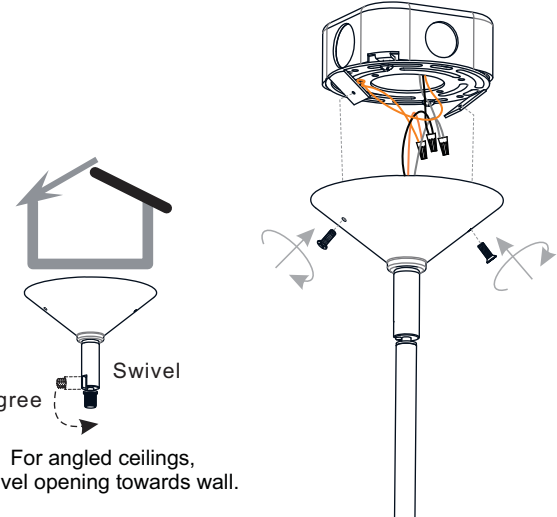

Swivel
90Degree
For angled ceilings,
Swivel opening towards wall.

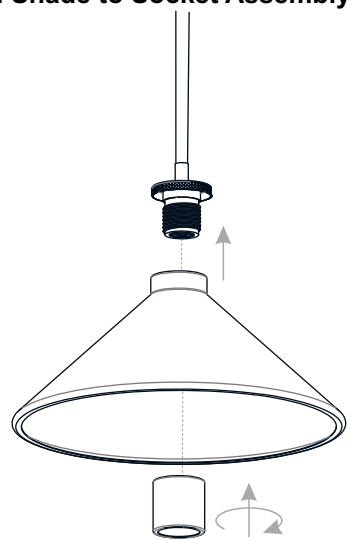

6 Install Shade to Socket Assembly




7 Install Bulb

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):

 BULB BASE TYPE Medium (E26)	 BULB TYPE TYPE A
---	--

100W MAX

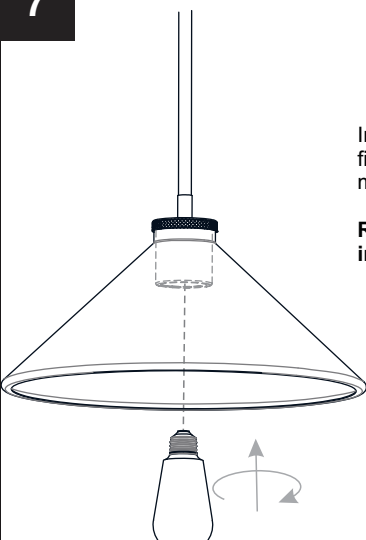

Your installation is now complete! Restore electricity and save this sheet for future reference.