

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.

TOOLS REQUIRED

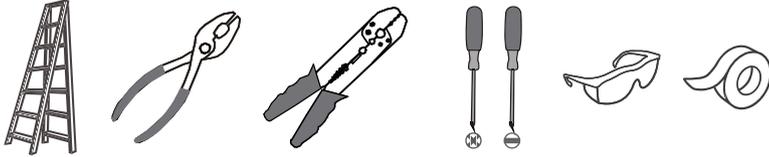


Ratings	120Vac, 60Hz	
	Model No.	Wattage
	PCCME1718C	28W

CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quezel.com.

PACKAGE CONTENTS

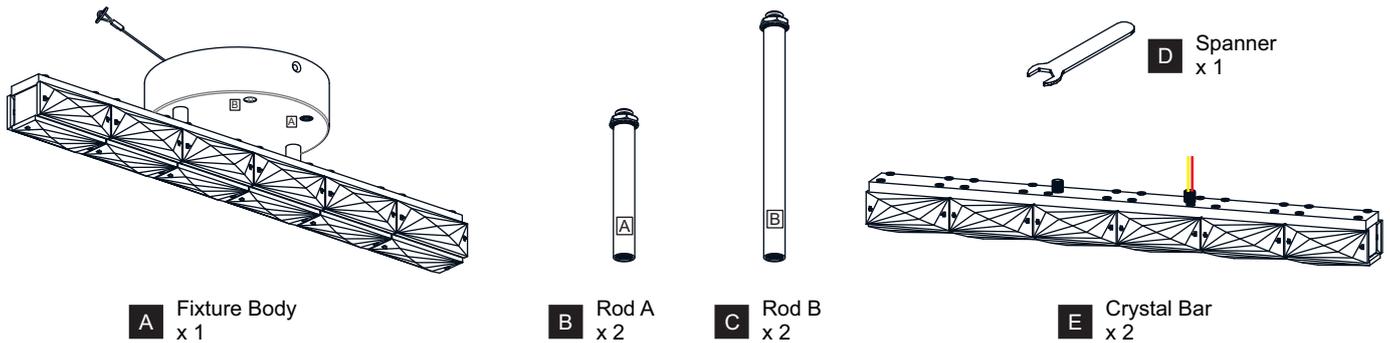

MOUNTING HARDWARE



1 Install Crystal Bar, Rod A to Ceiling Canopy

1. Line Rods A to Location A on the ceiling canopy during assembly.
2. Remove Labels "A" from ceiling canopy and Rods after assembly.

2 Install Crystal Bar, Rod B to Ceiling Canopy

1. Line Rods B to Location B on the ceiling canopy during assembly.
2. Remove Labels "B" from ceiling canopy and Rods after assembly.

3 Connect Fixture Wires to Driver

Red wire from fixture identified with the label "LED +" Red wire from Driver identified with the label "LED +"

Yellow wire from fixture identified with the label "LED -" Yellow wire from Driver identified with the label "LED -"

4 Install Crossbar

5 Install Lanyard

Lanyard

Button Stop

6 Connect Supply Wires to Driver


White wire from supply White wire from Driver

Black (or red) wire from supply Black wire from Driver

Ground wire from supply Ground wire from fixture

Green ground screw

7 Install Fixture Body to Crossbar

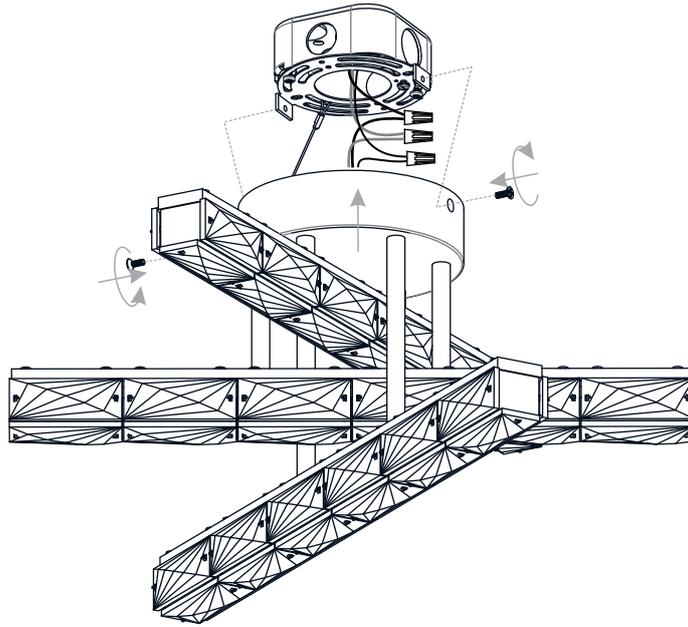

Your installation is now complete! Restore electricity and save this sheet for future reference.