



800-892-1206

info@northeastlantern.com

Please Inspect your product upon receiving!

Any broken glass needs to be reported within 30 days of receipt. We test every socket before it leaves the shop. Any other electrical concerns you should contact your electrician.

Care instructions:

- To dust your Northeast Lantern, you may dampen a soft cloth with water or glass cleaner to clean the glass and the metal.
- Any variation to the finish will even out over time through the natural patina process.
- To remove any type of blemish that is on your light, you may use a light Scotch-Brite pad. Lightly scrub the surface to avoid excessive scratching of the metal. Scrubbing all surfaces evenly can avoid inconsistencies in finish and bare spots.

Mounting Screws for your Northeast Lantern:

Northeast Lanterns are mounted on all different types of applications. For this reason, NEL does not provide screws for mounting.

Wall mounted and hanging fixtures come with the appropriate bracket that connects to the junction box.

Post mounted fixtures will come with 2 wood screws. This does not mean these are the appropriate screws for your application. Please consult your electrician and/or contractor for the appropriate mounting screws.

INSTALLATION INSTRUCTIONS



- Fingerprints on metal are initially prominent due to accelerated oxidation.**
- Please use gloves when installing to protect the finish in it's natural state.**

**Thank you for purchasing
an American made product.**




Our finishing process results in a living patina that evolves over time. It is a hand applied finish, after about 1 month outside it will begin to even in color. Finishes can vary slightly from fixture to fixture. Fixtures placed under a covered area may take a bit longer to patina. Fixtures in different locations on your home may look slightly different in color. We often use the example of a handful of coins. The pennies are usually different colors. The older ones are completely dark and even. This takes time and circulation, but eventually, they will all look the same.

Important information regarding our finish:

INSTALLATION INSTRUCTIONS


Side Wall Mount

1. Fasten cross bar to the junction box.
2. Screw the threaded pipe into the cross bar.
3. Connect the wires (see note below).
4. Position the fixture over the threaded pipe and attach mounting cap on to the extending threaded pipe.
5. For fixtures marked for wet locations, caulk the upper $\frac{2}{3}$ of the wire connection enclosure with a clear silicone rubber sealant, suitable for exterior use. Leave the bottom $\frac{1}{3}$ uncaulked.

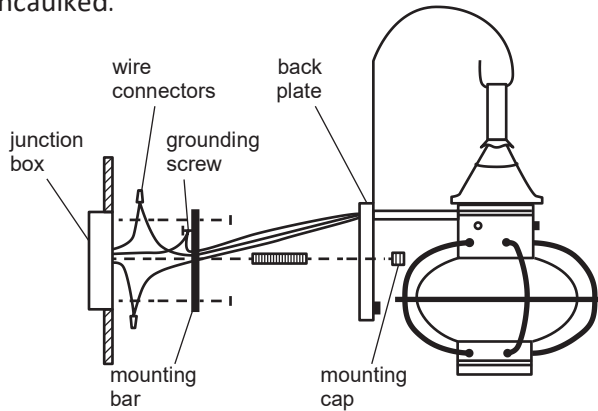

Flush Mount


1. Fasten cross bar to junction box.
2. Screw mounting studs into cross bar.
3. Make wire connections (see note below).
4. Tuck wires into junction box.
5. Slide fixture onto mounting studs and secure with decorative screws.

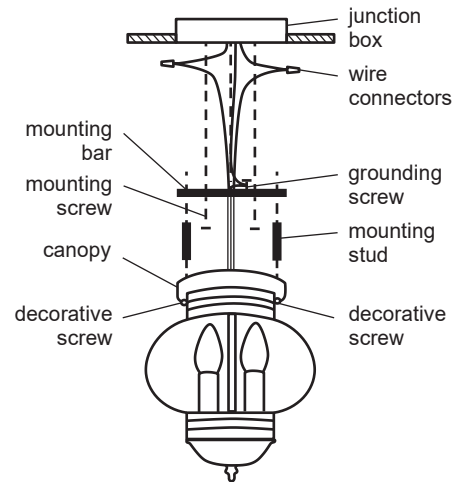

Chain Hanging Fixture


1. Loosen the ring on the screw collar and allow it to slide down the chain followed by the canopy.
2. Attach cross bar to junction box with threaded pipe in place. Threaded pipe should extend about $1\frac{1}{4}$ " from the ceiling.
3. Make wire connections (see note below).
4. Tuck wires inside the junction box and raise canopy against ceiling and screw ring on to the screw collar.

For additional safety for hanging/pendant fixtures, we suggest tying an underwriter's knot in the cord, above the ceiling canopy. Adjust the cord length accordingly before tying the knot, then make the electrical connection to the service wires.

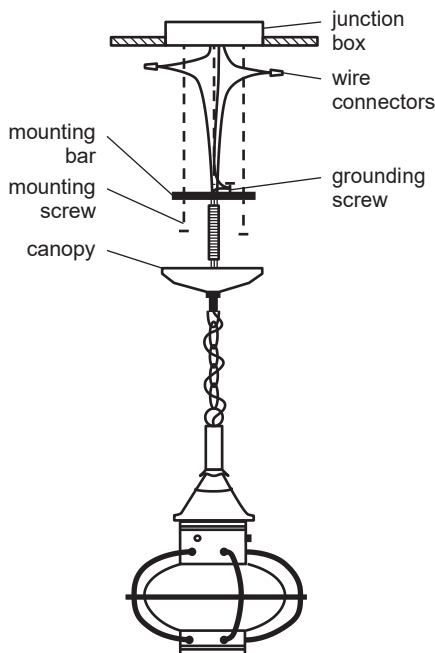

Post Mount

1. For fixtures with a steel cradle (spider), slide the spider over post first.
2. For fixtures without a steel cradle, make all electrical connections (see note below).
3. Place all wires down into post.
4. Secure fixture to post using a self tapping screw.
5. (For fixtures with spider only) Slide spider up under fixture and screw legs into post making sure light is level and supported on all four sides.

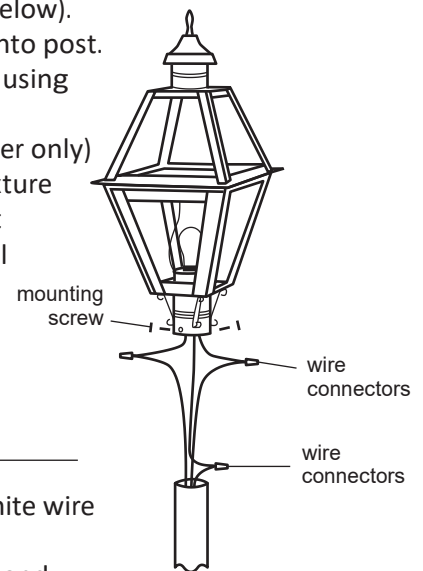

Wire Connections

1. Place the white or taped wire evenly against the white wire from the outlet box or post.
2. Fit the connector (not included) over the two wires and screw in place until it is tight. Try, gently to pull the connector off the wires. If it comes off, repeat steps above and check again for a firm connection.
3. Connect the black or marked wire (by fine print) from the fixture to the black wire from the outlet box or post in the same manner as described in step 2.
4. If fixture mounts using a cross bar, attach bare ground wire to the green screw located on the cross bar. If the fixture does NOT mount with a cross bar, attach bare fixture ground wire to the service ground wire using a wire connector (not included).

All fixtures must be installed by a licensed electrician.