



GABRIEL SCOTT

EST. 2012






KELLY Large Chandelier

in Satin Brass

A chandelier that moves with glamorous intrigue, the KELLY Chandelier's metallic chain cascades through its various layers to create a glisten reflective effect. A bold synergy of cold metal with warm light, the black or brass frame hosts a matching chain that brightens any interior with midnight color.

With its Art Deco sensibility, the KELLY Chandelier is a transitional light fixture of exemplary proportion. Available in small, large and extra-long. Custom sizes available.

All Gabriel Scott pieces are handmade in Canada.

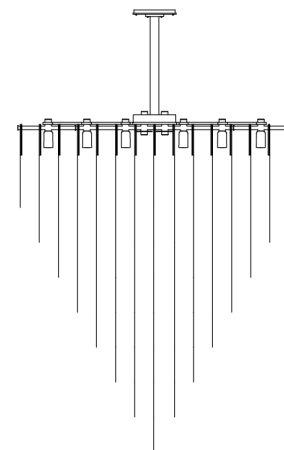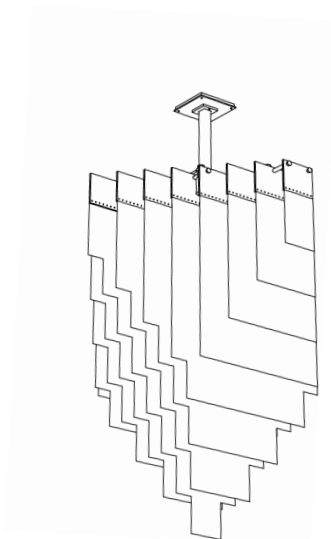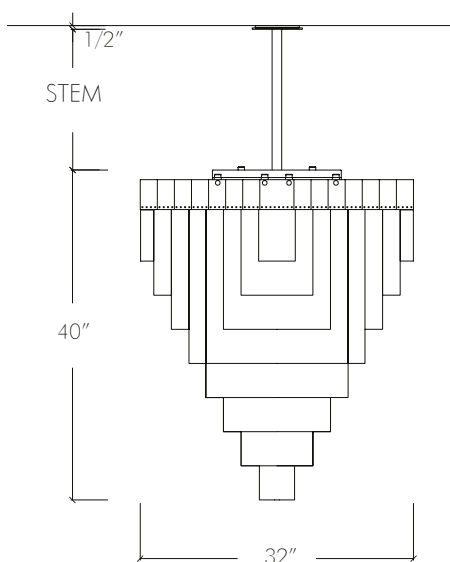

SPECIFICATIONS

Standard Finishes:

Metal: Blackened Steel, Satin Nickel, Satin Brass, Satin Copper or Satin Bronze

Specifications:

Dimensions: 32" x 32" x 40" H + Stem

81.3cm x 81.3cm x 101.6cm + Stem

Weight: 80 lbs/ 36.3 kg

Light Source: E60L12DC-KO - 110V
UVC1250TD - 220V

Standard Lead time: 12 - 14 weeks

Stems & Canopies:

Standard Stem Lengths: 6", 12", 18" or 24"

15.3cm, 30.5cm, 45.7cm or 60.9cm

Additional Stem Lengths: 30", 36", 42" or 48"

76.2cm, 91.4cm, 106.7cm or 121.9cm
(up-charge applies)

Standard Canopy: 5" x 0.5" / 12cm x 1.3cm


Deep Canopy: Dimensions on request.

Custom finishes available upon inquiry.


Made and assembled in Canada. Item is UL & CE listed.

STANDARD FINISHES

Metal:



Blackened Steel



Satin Nickel



Satin Brass



Satin Copper





Satin Bronze

LED DRIVER

E60L12DC-KO - 110V

Magnitude's E60L12DC-KO dimmable voltage LED driver is class 2 rated and designed to operate with any standard MLV/ Incandescent TRIAC (Leading edge) dimmer switch. Encased in a low profile aluminum enclosure that includes 2 knock-outs to enable easy installation makes it the perfect choice for under cabinet lights, tape lights and various LED fixtures installations. Our electrical specification includes Auto Reset, over current and short circuit protection. Efficiency of 90% and higher allows the driver to operate at low temperatures.

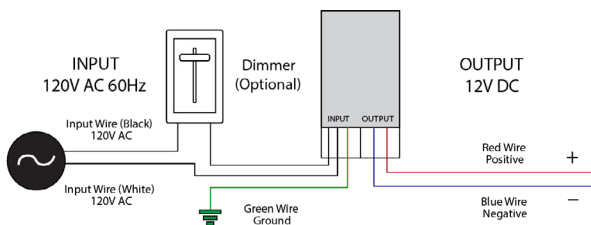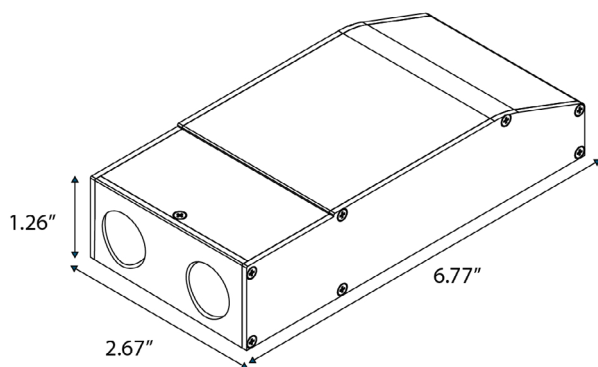

Features:


- Dimmable with any standard MLV/Incandescent TRIAC- (Leading edge) dimmer switch.
- Super compact ALUMINUM CASE.
- Class 2
- UL 8750
- IP67 - Withstands wet and salty conditions.
- Nema 3R - Outdoor Use
- Auto-Reset Protection for short circuits & over-voltage.
- FCC 15 part 2
- 12V DC True RMS

Specifications:

| | |
|-----------------------------|-------------------------|
| Max Load | 60W |
| Input Voltage | 120V AC |
| Input Current at Max Load | 0.61 A |
| Output Voltage | 12V DC |
| Output Current at Max load | 5.26 A |
| Power Factor | 0.95 |
| Efficiency | > 90 % |
| Operating Temp. | -20c - 70c (-4F - 158F) |
| Short Circuit Protection | Yes |
| Overcurrent Protection | Yes |
| Over Temperature | Yes |
| Open Circuit Protections | Yes |
| Input Wires (White / Black) | 14 AWG |
| Output Wires (Red / Black) | 18 AWG |
| Weight | 481 g |
| Dimensions (inches) | 6.77" x 2.67" x 1.26" |
| Dimensions (cm) | 17.2cm x 6.8cm x 3.2cm |

LED DRIVER

UVC1250TD - 220V

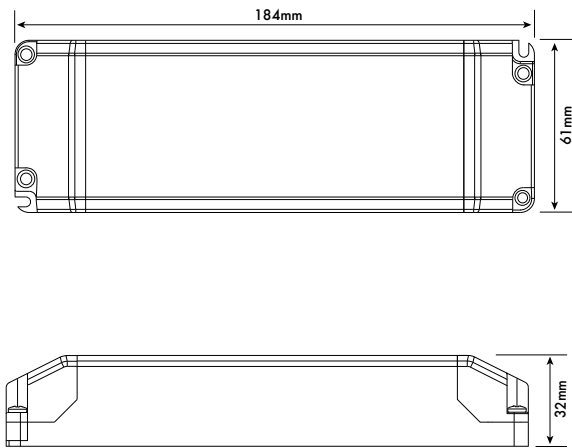

Features:

- Constant voltage output
- Fully isolated
- Short circuit, over current and over voltage protection up to 80% efficient.
- Fire resistant plastic cover
- Compatible with leading and trailing edge dimmers
- 20 ~ 100% Dimming Load and Dimming range
- Mains dimmable
- Screw terminals
- IP44 design for indoor use
- 2 years warranty

Specifications:

| | |
|-----------------------|-----------------------------|
| Part Code | UVC1250TD UVC2450TD |
| Voltage | 220V ~ 240VAC |
| Frequency | 50-60 Hz |
| Current | 0.4A |
| Inrush Current | <2.5A |
| Power Factor | 0.95 |
| Load Voltage | 12V |
| No Load Voltage | 12V |
| Current | 4.16A |
| Power | 50W |
| Power Factor | >0.95 |
| Efficiency (TYP.) | >80% |
| Over Load | Auto-recovery |
| Short Circuit | Auto-recovery |
| Over Voltage | Auto-recovery |
| Operating Temperature | -20 ~ +50°C |
| Storage Temperature | -40 ~ +70°C |
| Relative Humidity | 5 ~ 95% |
| Lifetime | 50K hrs at TC max (85°C) |
| Connections | Screw terminal on I/P & O/P |
| Weight | 200g |
| Dimensions (inches) | 7.2" x 2.4" x 1.25" |
| Dimensions (cm) | 18.4cm x 6cm x 3.2cm |



GABRIEL SCOTT

EST. 2012



KELLY




Small Chandelier

*in Blackened Steel, Satin
Brass & Satin Nickel*

A chandelier that moves with glamorous intrigue, the KELLY Chandelier's metallic chain cascades through its various layers to create a glisten reflective effect. A bold synergy of cold metal with warm light, the black or brass frame hosts a matching chain that brightens any interior with midnight color.

With its Art Deco sensibility, the KELLY Chandelier is a transitional light fixture of exemplary proportion. Available in small, large and extra-long. Custom sizes available.

All Gabriel Scott pieces are handmade in Canada.

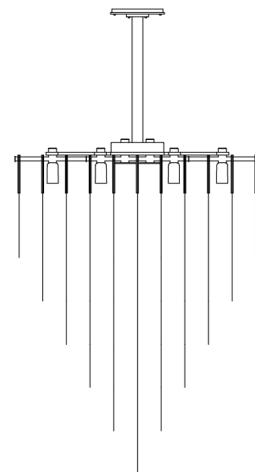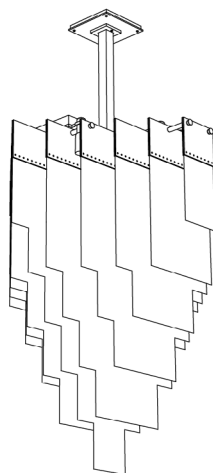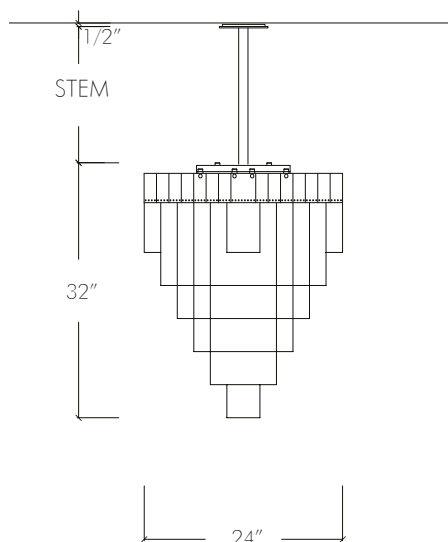

SPECIFICATIONS

Standard Finishes:

Metal: Blackened Steel, Satin Nickel, Satin Brass, Satin Copper or Satin Bronze

Specifications:

Dimensions: 24" x 24" x 32" H + Stem

61 cm x 61 cm x 81.3 cm H + Stem

Weight: 50 lbs/ 22.7 kg

Light Source: E60L12DC-KO - 110V
UVC1250TD - 220V

Standard Lead time: 12 - 14 weeks

Stems & Canopies:

Standard Stem Lengths: 6", 12", 18" or 24"

15.3cm, 30.5cm, 45.7cm or 60.9cm

Additional Stem Lengths: 30", 36", 42" or 48"

76.2cm, 91.4cm, 106.7cm or 121.9cm

(up-charge applies)

Standard Canopy: 5" x 0.5" / 12cm x 1.3cm


Deep Canopy: Dimensions on request.

Custom finishes available upon inquiry.

Made and assembled in Canada. Item is UL & CE listed.

STANDARD FINISHES

Metal:



Blackened Steel



Satin Nickel



Satin Brass



Satin Copper





Satin Bronze

LED DRIVER

E60L12DC-KO - 110V

Magnitude's E60L12DC-KO dimmable voltage LED driver is class 2 rated and designed to operate with any standard MLV/ Incandescent TRIAC (Leading edge) dimmer switch. Encased in a low profile aluminum enclosure that includes 2 knock-outs to enable easy installation makes it the perfect choice for under cabinet lights, tape lights and various LED fixtures installations. Our electrical specification includes Auto Reset, over current and short circuit protection. Efficiency of 90% and higher allows the driver to operate at low temperatures.

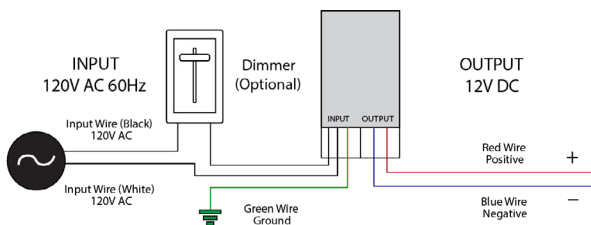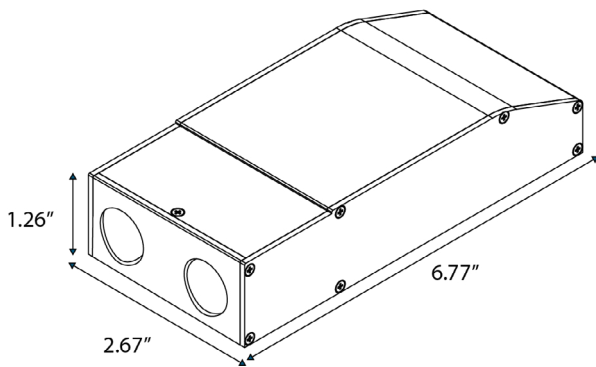

Features:


- Dimmable with any standard MLV/Incandescent TRIAC- (Leading edge) dimmer switch.
- Super compact ALUMINUM CASE.
- Class 2
- UL 8750
- IP67 - Withstands wet and salty conditions.
- Nema 3R - Outdoor Use
- Auto-Reset Protection for short circuits & over-voltage.
- FCC 15 part 2
- 12V DC True RMS

Specifications:

| | |
|-----------------------------|-------------------------|
| Max Load | 60W |
| Input Voltage | 120V AC |
| Input Current at Max Load | 0.61 A |
| Output Voltage | 12V DC |
| Output Current at Max load | 5.26 A |
| Power Factor | 0.95 |
| Efficiency | > 90 % |
| Operating Temp. | -20c - 70c (-4F - 158F) |
| Short Circuit Protection | Yes |
| Overcurrent Protection | Yes |
| Over Temperature | Yes |
| Open Circuit Protections | Yes |
| Input Wires (White / Black) | 14 AWG |
| Output Wires (Red / Black) | 18 AWG |
| Weight | 481 g |
| Dimensions (inches) | 6.77" x 2.67" x 1.26" |
| Dimensions (cm) | 17.2cm x 6.8cm x 3.2cm |

LED DRIVER

UVC1250TD - 220V

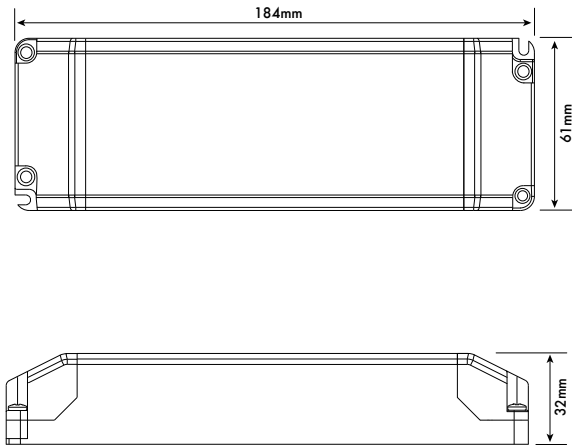

Features:

- Constant voltage output
- Fully isolated
- Short circuit, over current and over voltage protection up to 80% efficient.
- Fire resistant plastic cover
- Compatible with leading and trailing edge dimmers
- 20 ~ 100% Dimming Load and Dimming range
- Mains dimmable
- Screw terminals
- IP44 design for indoor use
- 2 years warranty

Specifications:

| | |
|-----------------------|-----------------------------|
| Part Code | UVC1250TD UVC2450TD |
| Voltage | 220V ~ 240VAC |
| Frequency | 50-60 Hz |
| Current | 0.4A |
| Inrush Current | <2.5A |
| Power Factor | 0.95 |
| Load Voltage | 12V |
| No Load Voltage | 12V |
| Current | 4.16A |
| Power | 50W |
| Power Factor | >0.95 |
| Efficiency (TYP.) | >80% |
| Over Load | Auto-recovery |
| Short Circuit | Auto-recovery |
| Over Voltage | Auto-recovery |
| Operating Temperature | -20 ~ +50°C |
| Storage Temperature | -40 ~ +70°C |
| Relative Humidity | 5 ~ 95% |
| Lifetime | 50K hrs at TC max (85°C) |
| Connections | Screw terminal on I/P & O/P |
| Weight | 200g |
| Dimensions (inches) | 7.2" x 2.4" x 1.25" |
| Dimensions (cm) | 18.4cm x 6cm x 3.2cm |