


ASSEMBLY INSTRUCTION MODEL #LAY-300-LG



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

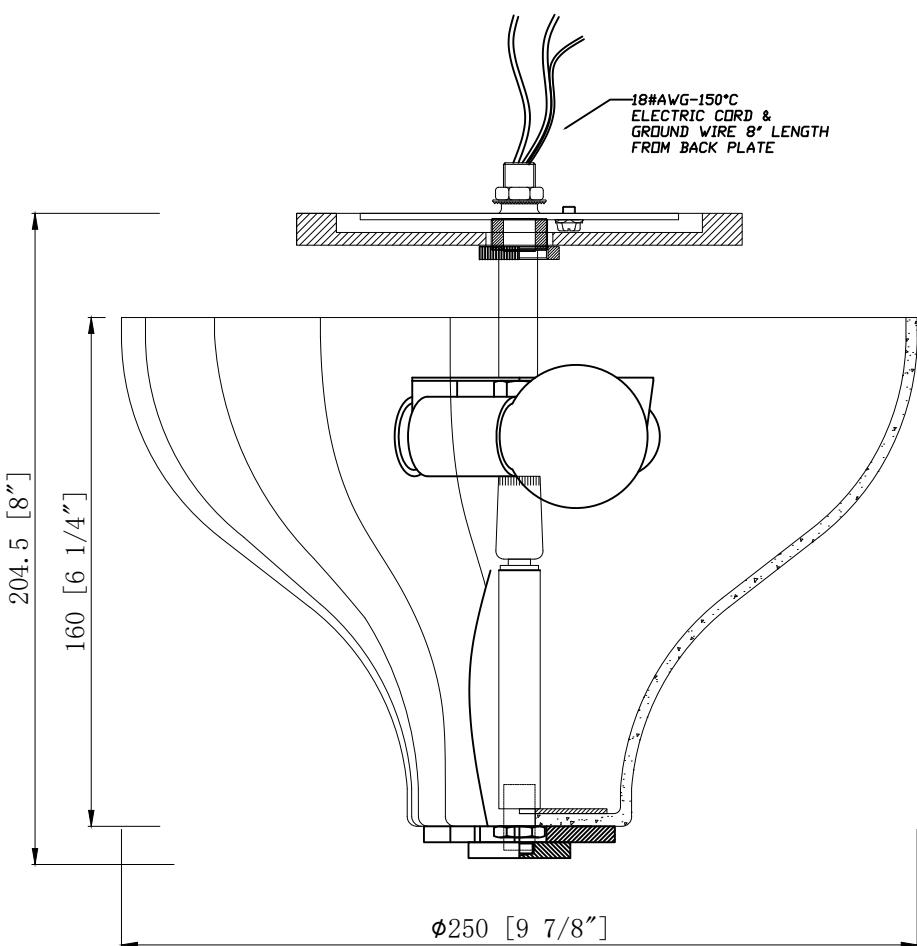



You will need 3 - Cand.Bulb
25 Watts Recommended 40 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS Damp RATED


How to Install

1. Remove the collar ring from the coupler on the mounting strap.
2. Feed the wire through the collar ring and canopy.
3. Screw the mounting strap onto the center rod.
4. Raise the frame up to the ceiling and attach the mounting strap onto the outlet box using hex nuts. Do the wire connections as illustrated. Secure the canopy with the collar ring.
5. Install the bulb (not included) onto the socket.
6. Slide one rubber washer over the threaded nipple on the bottom of the frame. In this order, slide the glass shade, one rubber washer, and the decorative plate over the threaded nipple. Secure the glass with a hex nut. If the glass is not straight, gently hold it and adjust it until it is level.
7. Place the decorative plate over the hex nut and secure it with the finial.

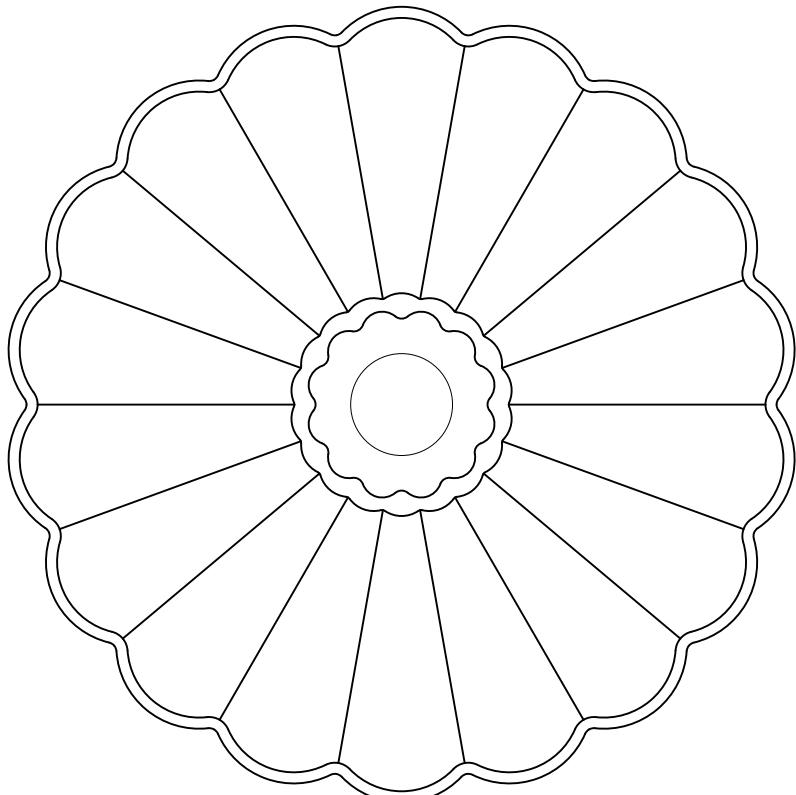




ASSEMBLY INSTRUCTION MODEL #LAY-300-LG

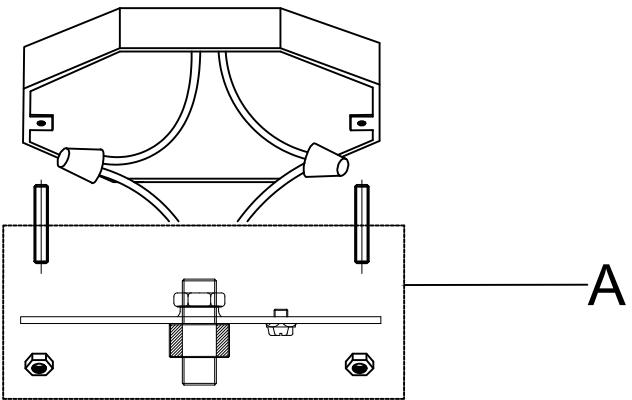

Part Number

- A. (1)-Mounting hardware
- B. (1)-Canopy (XAR300LGCAN5.5IN)
- C. (1)-Collar Ring
- D. (1)-Center rod
- E. (1)-Swivel
- F. (1)-Metal Washer
- G.(1)-Glass shade (XAR300GLA9.75IN)
- H. (2)-Rubber washer
- I. (1)-Decorative plate
- J. (1)-Final (XAR300LGFIN)

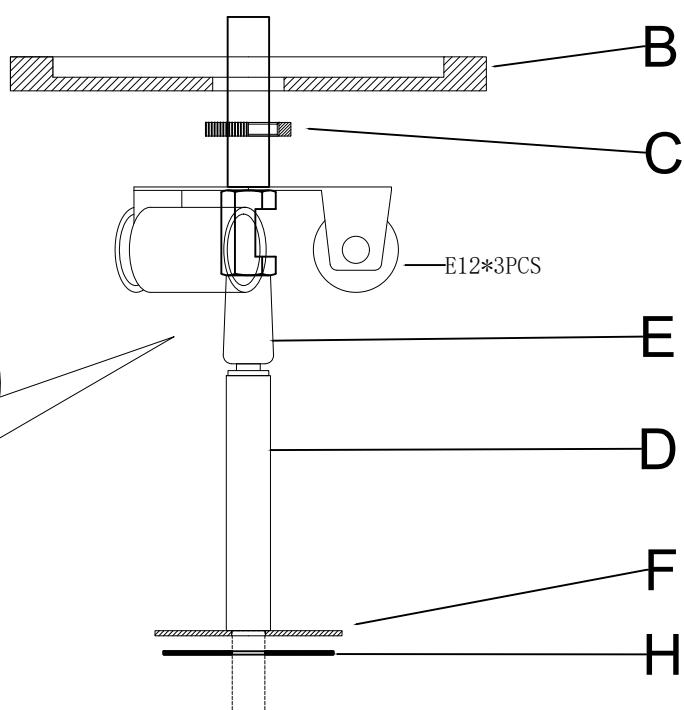


E

D

F

H

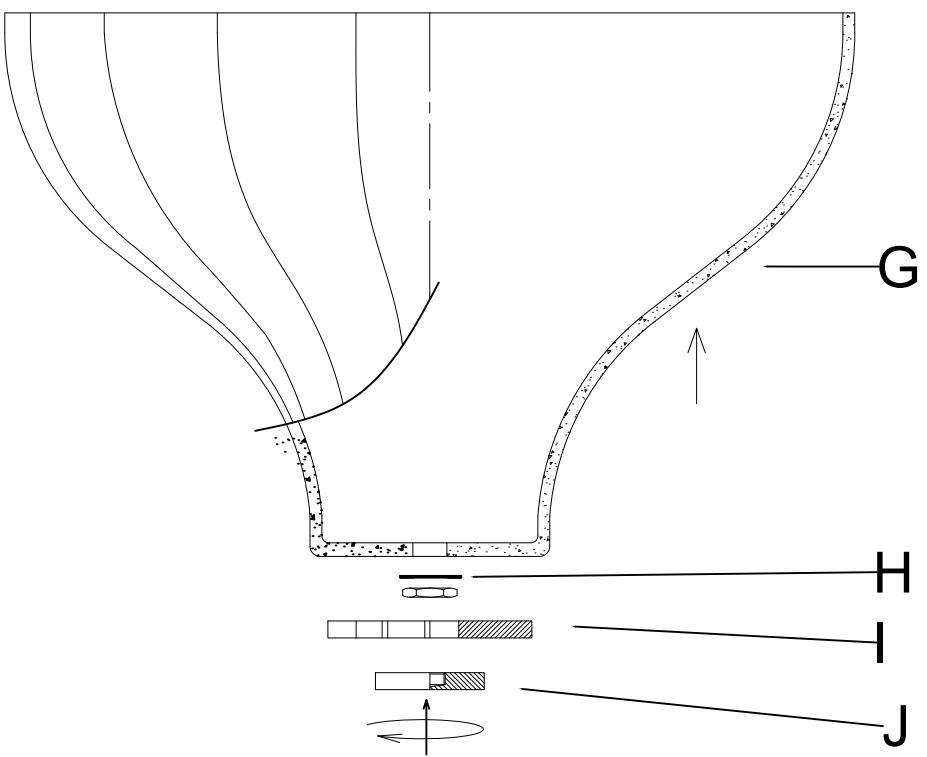

G

H

I

J