BLACKJACK®
LIGHTING

LPA PENDANT
INSTALLATION INSTRUCTIONS

CAUTION
Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

GENERAL
Read all instructions carefully for safe operartion and installation.
All electrical connections must be in accordance with local and national electrical code (N.E.C.) standards.
Remove the fixture and mounting package from the box. Make sure no parts are missing by referencing the illustrations on these Installation Instructions. Please contact Blackjack Lighting at 847-941-0588 if any parts are missing or damaged.
This product is suitable for DAMP locations.

PREPARATION

1. Remove the fixture from its box.

2. Pull black and white driver wires(3&5) wires through the center hole in the canopy backplate(13) and then through the center hole in the mounting bracket(10).

3. Pull the black and white supply wires(2&4) out from the junction box(1). Using wire connectors(8), connect them to the black and white driver wires(3&5).

3a. (Optional) Connect pink and purple dimming wires from junction box(6) to pink and purple dimming wires from driver(7).

4. Attach the mounting bracket(10) to the junction box(1) using two mounting screws and nuts(9). If there is a house ground wire, you may connect it to the canopy backplate(13) if desired.

5. Unscrew the two nuts attached to mounting bracket(10). Push two studs on mounting bracket(10) through canopy backplate(13) and fasten with the two nuts previously removed.

ASSEMBLY AND INSTALLATION

1. Carefully unpack each of the three 12" glass sphere pendants(19). Each pendant assembly includes a socket and acrylic diffuser(17), threaded side pins(18), and cable.

2. To install the glass sphere pendants(19), screw the glass sphere pendants(19) into the sockets(17). Insert and tighten threaded side pins(18) for secure and level suspension.

3. Determine the appropriate length of each pendant wire (if in doubt about exact length needed, leave a little extra wire until final installation of canopy faceplate(15)). Push the excess wire up into the canopy backplate(13) by pressing the small barrel of the gripper(11) upward. This will release the wire tension and allow the suspended wire to be pulled through gripper(11). Roll excess wire into a small loop inside the canopy.

4. Make sure all wires are carefully placed inside canopy faceplate(15). Secure the canopy faceplate(15) to the canopy backplate(13) by tightening two decorative thumbscrews(12).

5. Once the assembled canopy is in place, use each gripper(11) to fine-tune the wire lengths of each pendant to preferred lengths.

6. Once the length of each wire has been established, any remaining bends or kinks in the wire can be straightened by bending out the kinks by hand while heating the cord up with the warm air from a hair dryer or heat gun.

Blackjack Lighting reserves the right to change, modify or upgrade our products without notice. © 2025 Blackjack Lighting LLC
tel: **(847) 941-0588** email: **sales@blackjacklighting.com** web: **Blackjacklighting.com**

HARDWARE

Wire Connector (#6)
Qty. Included: 4

Mounting Screw (#7)
Qty. Included: 2

Decorative Thumbscrew (10)
Qty. Included: 2

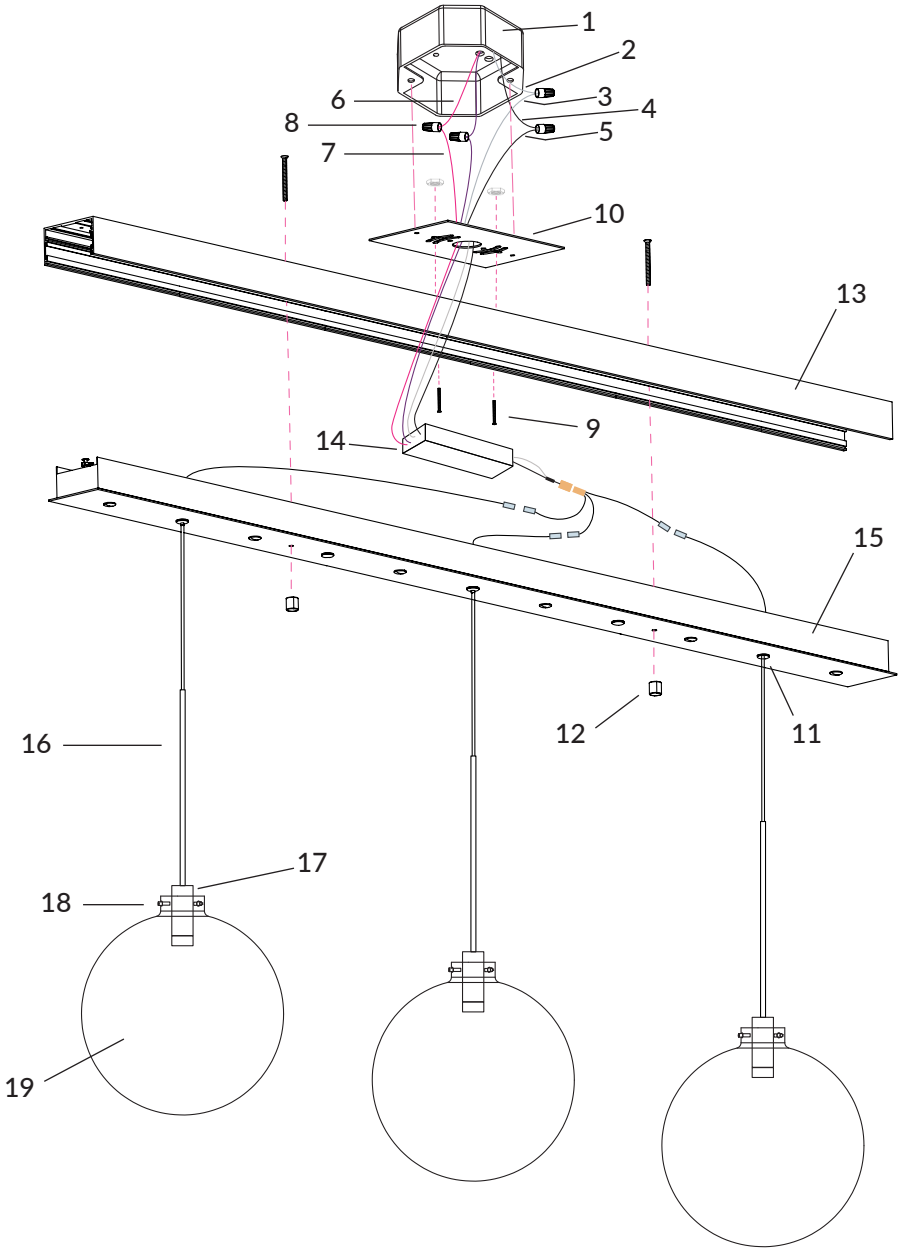

Figure 1

1. JUNCTION BOX (not supplied by BJL)
2. WHITE SUPPLY WIRE
3. WHITE DRIVER WIRE
4. BLACK SUPPLY WIRE
5. BLACK DRIVER WIRE
6. PINK/PURPLE DIMMING WIRES from Junction Box
7. PINK/PURPLE DIMMING WIRES from Driver
8. WIRE CONNECTORS
9. MOUNTING SCREWS and NUTS
10. MOUNTING BRACKET
11. STRAIN RELIEF / GRIPPER
12. DECORATIVE THUMBSCREWS
13. CANOPY BACKPLATE
14. DRIVER
15. CANOPY FACEPLATE
16. EXTENSION STEM
17. SOCKET & DIFFUSER
18. THREADED SIDE PINS
19. GLASS GLOBE PENDANT

Blackjack Lighting reserves the right to change, modify or upgrade our products without notice. © 2025 Blackjack Lighting LLC
tel: **(847) 941-0588** email: **sales@blackjacklighting.com** web: **Blackjacklighting.com**