

INSTALLATION INSTRUCTION

LED Undercabinet Strip Light

LU-**

WAC

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by dweLED. Substitution of parts or accessories not designated for use with this product by dweLED could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits dweLED. Remplacer des pièces ou accessoires non conçus pour ce produit dweLED pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidus sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

A



Mounting Clip
Qty: 2pcs/8 inch
2pcs/20 inch
4pcs/40 inch

B



Mounting Screw
Qty: 2pcs/8 inch
2pcs/20 inch
4pcs/40 inch

C



End Cap
Qty: 2pcs/8 inch
2pcs/20 inch
2pcs/40 inch

Wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760




INSTALLATION INSTRUCTION

LED Undercabinet Strip Light

LU-**

WAC

Fig.1

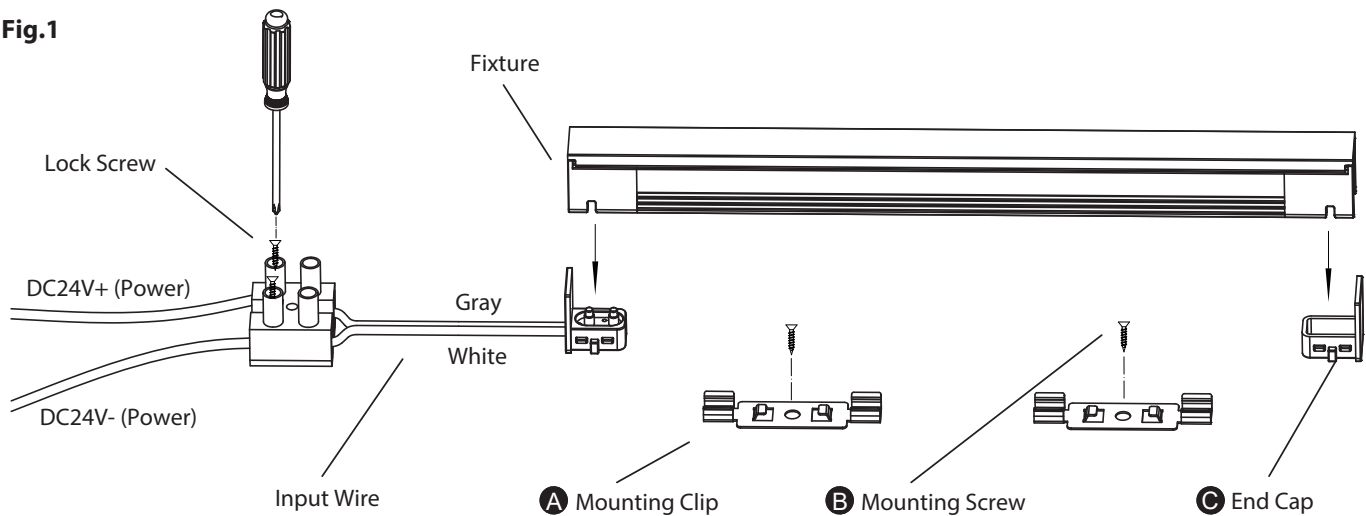

PREPARATION

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any parts necessary for installation.
2. Shut off the power at the circuit breaker .

MOUNTING THE FIXTURE (Fig. 1)

3. Drill holes in the cabinet aligned with the key holes located on the mounting clip (A).
4. Fasten the mounting clip (A) to the wall using the mounting screw (B) provided.
5. Fix the input module by hand, and press the fixture in the direction of the arrow in the figure with the other hand to install the input module.

Note:Input wire can be purchased separately according to the desired length.

6. As previous step, install the end cap into the fixture.

CONNECTING THE WIRES(Fig. 1)

7. Unscrew the lock screw on the connecting terminal.
8. Connect the output line of the DC24V power supply to the connection terminal. Connect the positive pole of the 24V power supply to the gray input wire, the negative pole of the 24V power supply to the white input wire. Screw the lock screw, Ensure terminal connect is secure.


COMPLETING THE INSTALLATION (Fig. 1)

9. Press the assembled fixture into the mounting clip.

WIRING MULTIPLE UNITS

a. End to End Connection with I-Connector (One included with each light bar):

Note:The total number of all connected fixtures should not exceed 18ft

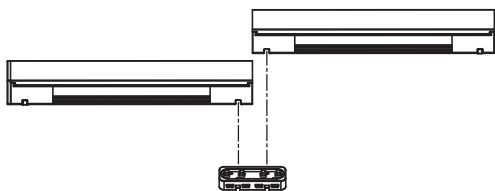

b. Connection with interconnect cable (Sold Separately):

Note:The total number of all connected fixtures should not exceed 18ft



Waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

