

CYLINDER 1

SUSPENDED CABLE

Our best-selling cylinders keep getting better. Suspended cylinders are offered in a broad range of sizes and more than a dozen finish options, with field-cuttable cables and lumens from 800 to almost 4000lm.

PROJECT NAME:


TYPE:



ORDERING INFORMATION

TYPE 24

JA8-2022 COMPLIANCE INDICATED BY SHADING

CYLINDER	LENGTH	FUNCTION	RATING	CYLINDER FINISH	BAFFLE FINISH	CRI	WATTAGE	CCT	OPTIC (UGR)	MEDIA	POWER SUPPLY	MOUNTING				
CP1X		D	1													
CP1X 2.5" Ø	Ø96W 96" White 192W 192" White Ø96B 96" Black 192B 192" Black XXXB Black Cable* XXXW White Cable* *(Specify length in inches) *(Cable is field cuttable)	D Downlight	1 Dry / Damp (IP30)	POWDERCOAT FINISHES	POWDERCOAT FINISHES	STATIC WHITE	 STATIC WHITE	24 2400K* *(90CRI only) 27 2700K 30 3000K 35 3500K 40 4000K	10 10° (<16) *(17W only) 15 15° (<16) 20 20° (<10) 25 25° (<10) 40 40° (<10) 60 60° (<16)	STANDARD MEDIA	INTEGRAL UCA 0-10V Analog 120-277V, LIN 1CE 120V Electronic Forward/Reverse	ROUGH-IN JBMP 4" Sq. or 4/0 Junction Box Mounting Plate				
				WH White	WH White	80S	11A 11W, 952 Lm					4 Soft Focus Lens (SFL)* *(Required for 10° optic)		FINISH OUT CMJB *1/2" and 3/4" Conduit Ceiling Mount Junction Box*		
				AG Satin Silver	AG Satin Silver	90S	17A 17W, 1416 Lm									
				AU Cashmere Gold	AU Cashmere Gold	97S										
				AB Architectural Bronze	AB Architectural Bronze								0 ALTERNATE MEDIA	REMOTE (120V) 1TR Philips, 2% Forward / Reverse 1RE Forward / Reverse		
				BB Burnt Bronze	BB Burnt Bronze								2 No Lens			
				BK Black	BK Black								2 Honey Comb Louver (HCL)	REMOTE (120-277V) URA 0-10V Analog, LIN ULH Lutron Hi-Lume Ecosystem 1% Fade to Black		
				CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)								3 Clear Glass Lens (CGL)	ULN Philips Xitanium 1% 0-10V, LOG	SMK3 3/0 Surface Mount Kit*	
				ALUMINA FINISHES	ALUMINA FINISHES								5 Frosted Glass Lens (FGL)	UAN Philips Xitanium 1% 0-10V, LIN	SMK4 4/0 Surface Mount Kit*	
				01 Brushed Obsidian	01 Brushed Obsidian								6 Frosted Soft Focus Lens (FSFL)	ULN Philips Xitanium 1% 0-10V, LIN	*(Available in powdercoat finishes.)	
				02 Matte Obsidian	02 Matte Obsidian								7 Frosted Linear Spread Lens (FLSL)	UEG eldoLED, 0.1% 0-10V, LOG		
				03 Brushed Dark Patinated Bronze	03 Brushed Dark Patinated Bronze										UEN eldoLED, 0.1% 0-10V, LIN	
				04 Matte Dark Patinated Bronze	04 Matte Dark Patinated Bronze										UED eldoLED, 0.1% DALI-2, LOG	
				05 Brushed Aged Aluminum	05 Brushed Aged Aluminum										ULD eldoLED, 0.1% DALI-2, LIN	
				06 Matte Aged Aluminum	06 Matte Aged Aluminum										UAS1/ Athena Control	
				07 Brushed Cast Brass	07 Brushed Cast Brass										UASR EldoLED, 0.1% 120-277V*	
				08 Matte Cast Brass	08 Matte Cast Brass										UCS1/Casambi Control	
				09 Brushed Light Patinated Bronze	09 Brushed Light Patinated Bronze										UCSR EldoLED, 0.1% 120-277V*	
				10 Matte Light Patinated Bronze	10 Matte Light Patinated Bronze										*(Includes Node. Extended lead time, consult factory. UASR/UCSR includes shunt.)	
				FINISH IMAGES ON PAGE 2	FINISH IMAGES ON PAGE 2										TUNABLE WHITE REMOTE (0.1%, 120-277V)	
															UDD eldoLED, DUALdrive DALI-2 DT6, LOG	
															UDG eldoLED, DUALdrive 0-10V, LOG	
															UDN eldoLED, DUALdrive 0-10V, LIN	
															UAD1/ Athena Control, UADR EldoLED, DUALdrive*	
															UCD1/ Casambi Control, UCDC EldoLED, DUALdrive*	
															*(Includes Node. Extended lead time, consult factory. UADR/UCDR includes shunt.)	

CYLINDER 1 SUSPENDED CABLE

ACCESSORIES

REPLACEMENT MEDIA - INCLUDES LENS RETAINER

- ☐ **SFL-CY1X-01** Soft Focus Lens
- ☐ **HCL-CY1X-01** Honeycomb Louver
- ☐ **CGL-CY1X-01** Clear Glass Lens
- ☐ **FGL-CY1X-01** Frosted Glass Lens
- ☐ **FSFL-CY1X-01** Frosted Soft Focus Lens
- ☐ **FLSL-CY1X-01** Frosted Linear Spread Lens
- ☐ **CGL-HCL-CY1X-01** Clear Glass Film W/ Honeycomb Louver
- ☐ **SFL-HCL-CY1X-01** Soft Focus Film W/ Honeycomb Louver

STATIC WHITE REPLACEMENT OPTICS

- ☐ **RO-50-15-S** 15° optic
- ☐ **RO-50-20-S** 20° optic
- ☐ **RO-50-25-S** 25° optic
- ☐ **RO-50-40-S** 40° optic
- ☐ **RO-50-60-S** 60° optic

WARM DIM REPLACEMENT OPTICS

- ☐ **RO-50-20-W** 20° optic
- ☐ **RO-50-25-W** 25° optic
- ☐ **RO-50-40-W** 40° optic
- ☐ **RO-50-60-W** 60° optic

TUNABLE WHITE REPLACEMENT OPTICS

- ☐ **RO-50-15-T** 15° optic
- ☐ **RO-50-20-T** 20° optic
- ☐ **RO-50-25-T** 25° optic
- ☐ **RO-50-40-T** 40° optic
- ☐ **RO-50-60-T** 60° optic

SUCTION CUP TOOL

- ☐ **CYX-TOOL-SUCTION** Baffle removal tool, provided with every 5 fixtures


EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- ☐ **EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz
- ☐ **EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V dimmable
- ☐ **EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V dimmable
- ☐ **EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz

***SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.**

POWDERCOAT FINISHES

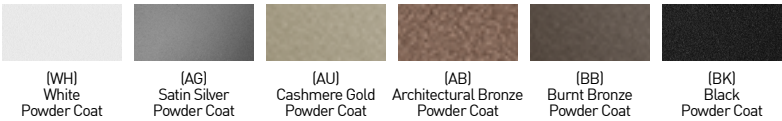

ALUMINA FINISHES BY LUCIFER LIGHTING™



CYLINDER 1 SUSPENDED CABLE

STATIC WHITE PERFORMANCE - 3000K

LUMEN PACKAGE	WATTS	10° OPTIC FIELD REDUCER		15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS	
		DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW
80S11A	11	-	-	891	76	1080	98	1088	98	1002	91	1104	100
80S17A/C	17	587	35	1451	73	1623	95	1624	95	1495	88	1643	96
90S11A	11	-	-	846	76	931	84	938	85	864	78	952	86
90S17A/C	17	506	28	1251	73	1399	82	1400	82	1291	75	1416	83
97S11A	11	-	-	744	67	819	74	825	75	760	69	838	76
97S17A/C	17	437	26	1101	64	1231	72	1232	72	1136	66	1246	73
90L17AL (2700K-1800K)	18	-	-	1125	66	1262	74	1241	73	1154	68	1280	75
90L17AD (3000K-1800K)	18	-	-	1148	68	1283	75	1284	76	1184	70	1299	76
90T17ATR (4000K-1800K)	17	-	-	1112	65	1230	72	1234	72	1157	68	1291	75
90T17ATH (5000K-2700K)	17	-	-	1100	64	1213	71	1215	71	1174	69	1251	73

TITLE 24 JA8-2022 INDICATED BY SHADING

UNIFIED GLARE RATING					
10° OPTIC FIELD REDUCER	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
<16	<16	<10	<10	<10	<16

OUTPUT MULTIPLIER	
CCT	CCT SCALE
2400K	0.76
2700K	0.957
3000K	1.000
3500K	1.019
4000K	1.030


MEDIA LIGHT LOSS FACTOR	
MEDIA	LIGHT LOSS FACTOR
No Lens	1.07
CGL	0.99
SFL	1.00
FGL	0.90
FSFL	0.84
FLSL	0.85
HCL	0.68
SFL+HCL	0.63

TUNABLE WHITE MULTIPLIER		
CCT	5000K-2700K	4000K-1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

WARM DIM PERFORMANCE - SOFT FOCUS LENS - 60° OPTIC

INCANDESCENT PROFILE


17AL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700K	2700K	2700K	2700K	2500K	1950K	1800K
Light Output (Lm)	1280	1024	896	640	256	128	26
Power (W)	17	13.6	11.9	8.5	3.4	1.7	0.3
Efficacy (LPW)	66	66	66	66	66	66	66

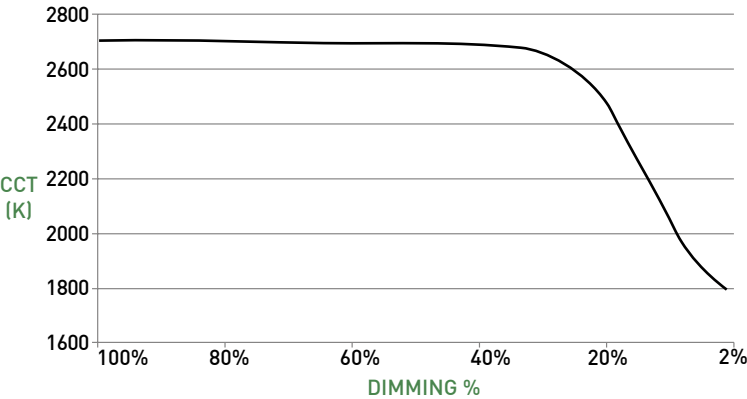

NOTE: LIN-TO-LIN 0-10V PAIRING NOT COMPATIBLE WITH WARM DIM.

HALOGEN PROFILE

17AD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000K	3000K	3000K	3000K	3000K	2150K	1800K
Light Output (Lm)	1299	1039	909	650	260	130	26
Power (W)	17	13.6	11.9	8.5	3.4	1.7	0.3
Efficacy (LPW)	68	68	68	68	68	68	68

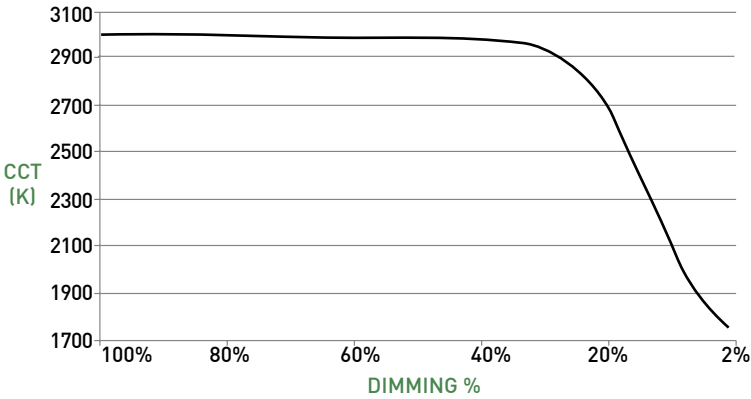


CYLINDER 1 SUSPENDED CABLE

PENDANT

- A CANOPY**
Die-cast 1.77" (45mm) canopy accommodates flat and slope ceiling conditions. Conceals hidden twist-on mounting hardware. Available with integral or remote driver.
- B CABLE**
Black or white cable available; up to 192.0" length; cable may be cut in field.
- C LUMINAIRE**
Die-cast body with integral heat sink and LED.
- D1 OPTICS**
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
- D2 10° FIELD REDUCER**
Soft Focus Lens, Honeycomb Louver, and Field Reducer provided with 10 degree beam selection. Reduces field angle by 10%.
- E MEDIA**
Cylinder baffle assembly can accept 2 lenses; soft focus lens or no lens standard and sealed in place.
- F BAFFLE**
Die-cast baffle minimizes aperture glare and conceals view into fixture.

DIMENSIONS / DRAWINGS

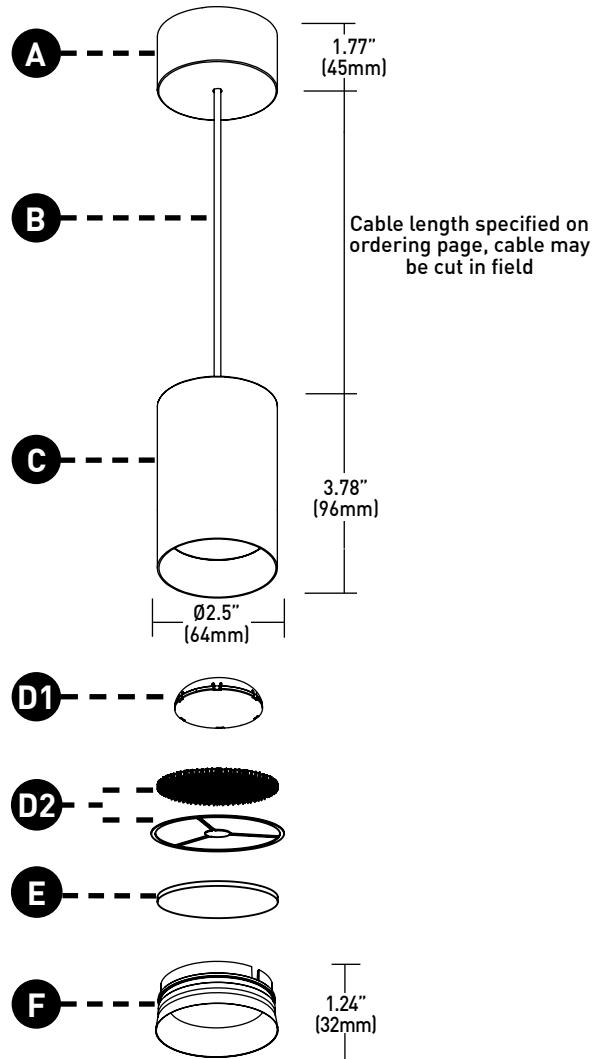

CYLINDER 1 SUSPENDED CABLE

MOUNTING

- G JBMP**
Mounting plate (concealed) for standard 4" square or 4" 4/0 j-box. To be installed during rough-in, prior to substrate, for ceiling thicknesses up to 0.75". Fixture to mount flush with minimalist transition to ceiling.

Part Number - CP1X-JBMP

- H SMK3**
Surface mount kit includes mounting plate and 4" concealer plate that installs between fixture and standard 3" 3/0 j-box for existing applications where standard j-box cutout is to be concealed.

Part Number - CP1X-SMK-3/0-(FINISH)




- I SMK4**
Surface mount kit includes mounting plate and 5" concealer plate that installs between fixture and standard 4" 4/0 j-box for existing applications where standard j-box cutout is to be concealed.

Part Number - CP1X-SMK-4/0-(FINISH)

- J CMJB**
Ceiling mount junction box perfectly matches the cylinder profile for a continuous, integrated look where exposed ceiling mount junction box and conduit applications apply. For use with 1/2" and 3/4" EMT conduit only. Features two conduit entrances on either side and one conduit knockout on top of j-box. J-box is IP10 rated; painted finishes only. Blank off plugs included.

Part Number - CP1X-CMJB-(FINISH)

DIMENSIONS / DRAWINGS

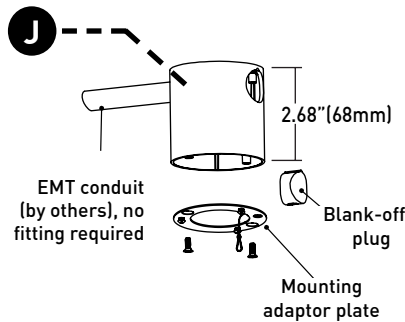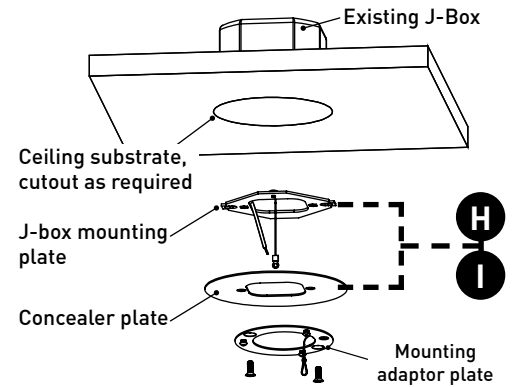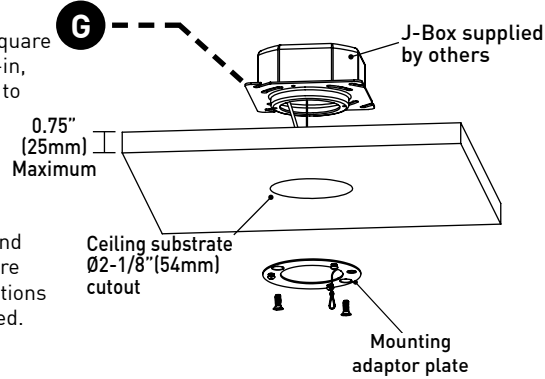

MOUNTING NOTES

- JBMP not recommended for use with pancake style j-box.
- Fixtures are surface mount and must have access to free air. For applications involving slat ceilings or confined mounting, consult Comprehensive Install Guide for required clearances for proper air flow and servicing.

REMOTE POWER SUPPLY

- K PS-RMT**
Remote power supply must be mounted in accessible area. Mounting device still required. Consult page 7 for dimming compatibility list. Consult install guide for complete details of suitable controls, wiring diagrams, and maximum allowable secondary run lengths between PS-RMT and cylinder.



- L ATHENA / CASAMBI CONTROL**
Controls integrated into remote driver assembly. All equipment is serviceable.

Athena Model Number: A-WN-D01-RF-BL & DC-OEM-DBI



Casambi Model Number: BT-S1E1-5400

- M ATHENA / CASAMBI EM SHUNT**
Included with drivers specified as ASR, ADR, CSR, or CDR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.

Model Number: PS-RMT-SHUNT

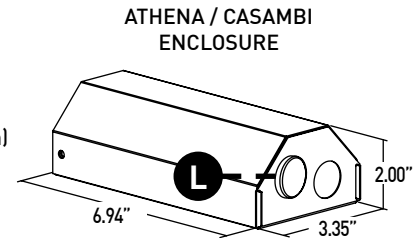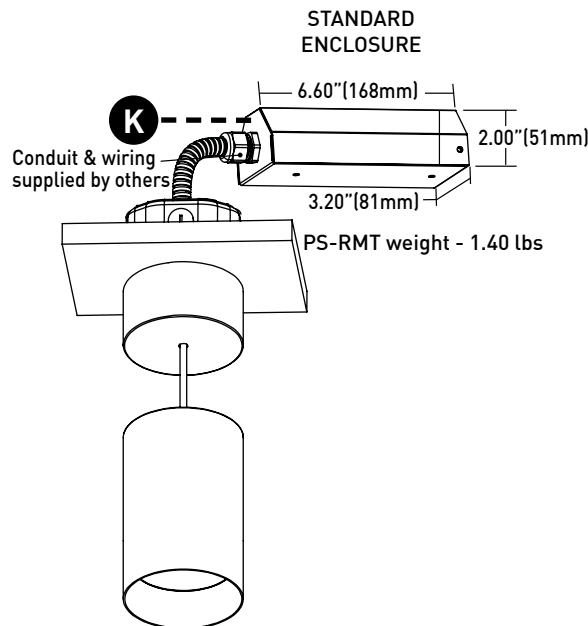

M ATHENA / CASAMBI EM SHUNT

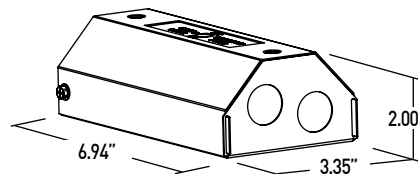

CYLINDER 1 SUSPENDED CABLE

TECHNICAL

CONSTRUCTION

Pendant: Die-cast aluminum body with integrated heat sink; painted finishes are granulated powder coat. Alumina finishes are anodized aluminum.

CMJB: Die-cast aluminum body; painted finishes are granulated powder coat.

Remote Power Supply: 22 Gauge galvanized steel.

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K.

3-step MacAdam ellipse LED module available in 90+ CRI configuration in color temperature of 2400K. Average rated lamp life: 50,000 hours. LED and driver assemblies are field-replaceable. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

TUNABLE WHITE LED

3-Step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning range of 2700K to 5000K and 1800K to 4000K. Average rated lamp life of 50,000 hours. Driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE		0-10V							ECO	DALI			ATHENA	CASAMBI
Power Supply	1CE/1RE	1TR	UCA/URA	UAN	ULN	UEG	UEN	UDG	UDN	ULH	UED	ULD	UDD	UAS/UAD	UCS/UCD
Minimum °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	0 °C	-20 °C	-20 °C	-20 °C	0 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	1.0%	2.0%	1.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For 1TR, UAN, ULN, UEG and UEN drivers consult chart on page 7 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
URA, 1RE	-	164'	105'	66'	40'
1TR, UAN, ULN	285'	180'	113'	71'	45'
ULH	60'	40'	25'	15'	-
UEG, UEN, UED, ULD, DD1, DG1, DN1, UAS, UCS, UAD, UCD	-	-	118'	72'	46'

FIXTURE SPACING

Recommended fixture on-center spacing is 12" (305mm) at minimum. In slat ceiling applications, fixture must have 0.5" (13mm) minimum clearance on no more than two sides. Recessed conditions require 1.5" (38mm) setbacks on all sides.

MOUNTING

Cylinder is supplied with a mounting adaptor plate, which integrates with required additional mounting accessories specified separately according to field application conditions, providing a minimalist transition from standard 4/0 or 4" square junction boxes and accommodating ceiling thicknesses of 0.44" (12mm) to 0.75" (19mm). Ceiling-mount junction box available for 1/2" (13mm) and 3/4" (19mm) conduit and feature concealed internal clamps for clean fitting-free conduit exit and entry.

LISTING

cTUVus listed to UL1598 standard for Dry / Damp (IP30) locations.

Title 24 JA8-2022 Listed. NEMA 410 compliant. Buy American Act Compliant.

DECLARE

LBC Declared

FIXTURE WEIGHT

CP1X - 0.9 lbs

Remote Driver - 1.4 lbs

LIMITED WARRANTY

Manufacturer's 1-year warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service. 5-year warranty on LED and power supply to operate with 70% of the original flux and remain within a range of 3 duv. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. Consult [website](#) for full warranty terms

CHANGE LOG

1. 03/15/2024: ADDED 10 DEGREE FIELD REDUCER, UPDATED 10 DEGREE PERFORMANCE DATA.

2. 07/22/2024: REMOVED L2 DRIVER.

3. 05/07/2025: UPDATED WARM DIM OFFERINGS AND PERFORMANCE

CYLINDER 1 SUSPENDED CABLE

DIMMING COMPATIBILITY

PHILIPS DRIVER COMPATIBILITY

Power supply 1TR Manufacturer	Family/Model #
Lutron Electronics	DV-600P
Lutron Electronics	DVELV-303P
Lutron Electronics	NTELV-600
Lutron Electronics	MAELV-600
Lutron Electronics	SELV-300P
Lutron Electronics	DVLV-600P
Lutron Electronics	NFTU-5A
Lutron Electronics	CTCL-153P
Lutron Electronics	GL-600H
Lutron Electronics	S-600P
Lutron Electronics	PHPM
Power supply UAN / ULN Manufacturer	Family/Model #
Lutron Electronics	DVTV plus PP-DV
Lutron Electronics	DVSCTV plus PP-DV
Lutron Electronics	DVSTV
Lutron Electronics	DVSCSTV
Lutron Electronics	QSGRJ-XP plus GRX-TVI
Lutron Electronics	QSGRJ-XE plus GRX-TVI
Lutron Electronics	QSGR-XE plus GRX-TVI
Lutron Electronics	NFTV plus PP-DV
Lutron Electronics	NTSTV
Lutron Electronics	RMJ-5T
Lutron Electronics	RMJS-8T
Lutron Electronics	FCJS-010
Leviton	IlumaTch IP7 series
Philips	Sunrise - SR1200ZTUNV

LUTRON DRIVER COMPATIBILITY

Power supply ULH Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _E (wireless)
GRAFIK Eye QS control unit	QSGR- _E
Homeworks QS control unit	QSGR- _E
Quantum Hub	QP2- _ _ 2C
Quantum Hub	QP2- _ _ 4C
Quantum Hub	QP2- _ _ 6C
Quantum Hub	QP2- _ _ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	



eldoLED DRIVER COMPATIBILITY

Power supply UEG / UEN Dimmer / Switch Control Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DDTV
Lutron Electronics	Nova® - NFTV
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Sensor Switch	nIO EZ
Synergy	ISD BC
Power supply UEG / UEN Dimmer / Switch Control Manufacturer	Family/Model #
Dimmer / Switch Control Manufacturer	GrafixEye® GRX-TVI w GRX3503
Energy Savr Node™ - QSN-4T16-S	
Lutron Electronics	TVM2 Module
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
ABB	SD/S 2.16.1

ANALOG DRIVERS AND DIMMERS

