

MONOPOINT CM1 HANG STRAIGHT

An innovative solution for sloped ceilings, this monopoint “hang straight” can suspend with a rigid stem up to 4’ in length, for ceiling pitches up to 45° while still allowing for a full 90° tilt.

PROJECT NAME:

TYPE:



ORDERING INFORMATION - MONOPOINT



JA8-2022 COMPLIANCE INDICATED BY SHADING

CYLINDER	LENGTH	FIXTURE	BODY FINISH	BAFFLE FINISH	STEM FINISH	CRI / WATTAGE PACKAGE	CCT	OPTIC (UGR)	DRIVER	MEDIA	MOUNTING
CM1		HS1									
CM1 2.60"	LENGTHS SL 3" Standard 24 24" 48 48" 24" AND 48" STEMS ARE FIELD CUTTABLE. 3" STANDARD LENGTH STEM IS MINIMUM LENGTH	ADJUSTABLE DRY / DAMP HS1 Adjustable 90° Fixture Tilt, Max ceiling pitch 12/12 (45°)	POWDERCOAT	POWDERCOAT	POWDERCOAT	 STATIC WHITE 80S11A 80+ CRI, 11 Watts lm Delivered - 1095 90S11A 90+ CRI, 11 Watts lm Delivered - 941 97S11A 97+ CRI, 11 Watts lm Delivered - 826	24 2400K* *(90+ CRI only)	10 10° (>19)	INTEGRAL	STANDARD MEDIA	ROUGH-IN
			WH White	WH White	WH White		27 2700K	15 15° (<13)	CA 0-10V Analog, LIN 120-277V	4 Soft Focus Lens* *(Required for 10° optic)	J JBMP 4" Sq. or 4/0 Junction Box Mounting Plate. Features 2.6" diameter canopy*
			BK Black	BK Black	BK Black		30 3000K	20 20° (<10)	CE 120V Electronic Forward / Reverse		
			AB Architectural Bronze	AB Architectural Bronze	AB Architectural Bronze		35 3500K	25 25° (<10)	REMOTE (120V) RE 120V Electronic Forward / Reverse	ALTERNATE MEDIA	* (Mounts to 4/0 junction box)
			AG Satin Silver	AG Satin Silver	AG Satin Silver	40 4000K	40 40° (<10)	60 60° (<13)			
			AU Cashmere Gold	AU Cashmere Gold	AU Cashmere Gold	 REMOTE STATIC WHITE 80S17A 80+ CRI, 17 Watts lm Delivered - 1655 90S17A 90+ CRI, 17 Watts lm Delivered - 1422 97S17A 97+ CRI, 17 Watts lm Delivered - 1249	24 2400K* *(90+ CRI only)	10 10° (>19)	REMOTE (120V-277V)	2 Honeycomb Louver* *(Not available for Wet Location)	FINISH OUT
			BB Burnt Bronze	BB Burnt Bronze	BB Burnt Bronze		27 2700K	15 15° (<16)	RA 0-10V Analog, LIN	3 Clear Glass Lens	G Zero Sightline Gypsum (1/16" Applique) Features 2.6" diameter canopy*
			CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)		30 3000K	20 20° (<10)	LH Lutron, Hi-Lume Ecosystem 1% Fade to Black,	5 Frosted Glass Lens	* (Mounts to 4/0 junction box)
			ALUMINA	ALUMINA	ALUMINA		35 3500K	25 25° (<10)	LP Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black	6 Frosted Soft Focus Lens	W Zero Sightline Millwork Features 2.6" diameter canopy*
			01 Brushed Obsidian	CONSULT FACTORY FOR ALUMINA FINISHES	CONSULT FACTORY FOR ALUMINA FINISHES		40 4000K	40 40° (<10)	EG eldoLED, SOLOdrive 0.1% 0-10V, LOG	7 Frosted Linear Spread Lens	* (Mounts to 4/0 junction box. Requires accessory part number CMHS-RTG ordered separately.)
02 Matte Obsidian				60 60° (<13)	EN eldoLED, SOLOdrive 0.1% 0-10V, LIN		8 Soft Focus Lens w/ Honeycomb Louver	R Remodel 4.5" Flange Overlay Canopy*			
03 Brushed Dark Patinated Bronze					ED eldoLED, SOLOdrive 0.1% DALI-2, LOG		F Frosted Glass Lens w/ Honeycomb Louver	* (Mounts to existing 4/0 junction box)			
04 Matte Dark Patinated Bronze					AS1 / Athena Control ASR eldoLED, DUALdrive 0.1%*		N No Lens* *(Not available for Wet Location)				
05 Brushed Aged Aluminum					* (Includes Athena Node. Increased lead time, consult factory. ASR includes shunt.)						
06 Matte Aged Aluminum					CS1 / Casambi Control CSR eldoLED, DUALdrive 0.1%*						
07 Brushed Cast Brass					* (Includes Athena Node. Increased lead time, consult factory. CSR includes shunt.)						
08 Matte Cast Brass					TUNABLE WHITE POWER SUPPLIES (120-277V)						
09 Brushed Light Patinated Bronze					DD eldoLED, DUALdrive 0.1% DALI-2, LOG						
10 Matte Light Patinated Bronze					DG eldoLED, DUALdrive 0.1% 0-10V, LOG						
					DN eldoLED, DUALdrive 0.1% 0-10V, LIN						
					AD1 / Athena Control ADR eldoLED, DUALdrive 0.1%*						
					* (Includes Athena Node. Increased lead time, consult factory. ADR includes shunt.)						
					CD1 / Casambi Control CDR eldoLED, DUALdrive 0.1%*						
					* (Includes Casambi Node. Extended lead time, consult factory. CDR includes shunt)						
PART NUMBER NOTES						ALL LM DELIVERED AND T24 COMPLIANCE REFLECT 3000K PAIRED WITH 25° OPTIC AND SOFT FOCUS LENS					
• CM1 ships as e.g., CM124HS1WHBK90S11*3040CA*4F											
• Remote driver ships as e.g., PS-RMT-90S-11A-1RE*											
• Mounting ships separate from fixture, part numbers listed on page 6.											

PART NUMBER NOTES

- CM1 ships as e.g., CM124HS1WHBK90S11*3040CA*4F
- Remote driver ships as e.g., PS-RMT-90S-11A-1RE*
- Mounting ships separate from fixture, part numbers listed on page 6.



Red List
Approved

Declare.

LUCIFER
LIGHTING COMPANY

luciferlighting.com

©2025 Lucifer Lighting Company

As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.

[PH] +1-210-227-7329
[FAX] +1-210-227-4967




pg. 1

[DATE OF REV: 05072025]

MONOPOINT CM1 HANG STRAIGHT

FINISHES

POWDERCOAT FINISHES

					
(WH) White	(BK) Black	(AB) Architectural Bronze	(AG) Satin Silver	(AU) Cashmere Gold	(BB) Burnt Bronze

ALUMINA FINISHES BY LUCIFER LIGHTING™

				
(01) Brushed Obsidian	(03) Brushed Dark Patinated Bronze	(05) Brushed Aged Aluminum	(07) Brushed Cast Brass	(09) Brushed Light Patinated Bronze
				
(02) Matte Obsidian	(04) Matte Dark Patinated Bronze	(06) Matte Aged Aluminum	(08) Matte Cast Brass	(10) Matte Light Patinated Bronze

ACCESSORIES

REPLACEMENT MEDIA

- ☐ **HCL-CT1** Honeycomb Louver*
- ☐ **CGL-CT1** Clear Glass Lens
- ☐ **SFL-CT1** Soft Focus Lens
- ☐ **FGL-CT1** Frosted Glass Lens
- ☐ **FSFL-CT1** Frosted Soft Focus Lens
- ☐ **FLSL-CT1** Frosted Linear Spread Lens

REPLACEMENT OPTICS

Interchangeable optics accessible by removing baffle.

- | Static White | Warm Dim | Tunable White |
|--|--|--|
| ☐ RO-50-15-S 15° optic | ☐ RO-50-15-W 15° optic | ☐ RO-50-15-S 15° optic |
| ☐ RO-50-20-S 20° optic | ☐ RO-50-20-W 20° optic | ☐ RO-50-20-S 20° optic |
| ☐ RO-50-25-S 25° optic | ☐ RO-50-25-W 25° optic | ☐ RO-50-25-S 25° optic |
| ☐ RO-50-40-S 40° optic | ☐ RO-50-40-W 40° optic | ☐ RO-50-40-S 40° optic |
| ☐ RO-50-60-S 60° optic | ☐ RO-50-60-W 60° optic | ☐ RO-50-60-S 60° optic |

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- ☐ **EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable
- ☐ **EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- ☐ **EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- ☐ **EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable

*SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.

ZERO-SIGHTLINE MILLWORK ROUTER TOOL GUIDE

Required for zero-sightline millwork installations. Factory recommends qty. 2 per order.

- ☐ **CMHS-RTG** Router Tool Guide

REPLACEMENT BAFFLE ASSEMBLY (INCLUDES MEDIA)

ASSEMBLY	SHAPE	RATING	FINISH	MEDIA
RBA	CM1			
REPLACEMENT BAFFLE ASSEMBLY	CM1 2.60"	1 IP20 Dry/Damp 2 IP65 Wet* *(Requires provided suction cup to service)	WH White BK Black AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze PR Primer CF Custom Finish* *(Consult Factory)	LEAVE BLANK FOR SOFT FOCUS LENS (SFL) HCL Honeycomb Louver* *(Not available for Wet Location) CGL Clear Glass Lens FGL Frosted Glass Lens FSFL Frosted Soft Focus Lens FLSL Frosted Linear Spread Lens NL No Lens* *(Not available for Wet Location)

MONOPOINT CM1 HANG STRAIGHT

PERFORMANCE - 3000K

LUMEN PACKAGE	WATTAGE	10° OPTIC FIELD REDUCER		15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S11A	11	454	41	991	90	1093	99	1095	100	1019	93	1145	104
80S17A	17	619	36	1435	84	1701	100	1655	97	1513	89	1640	96
90S11A	11	391	35	851	86	939	95	941	96	875	89	984	100
90S17A	17	532	31	1233	76	1461	90	1422	87	1300	80	1409	86
97S11A	11	337	30	747	68	824	75	826	75	768	70	864	79
97S17A	17	460	27	1083	64	1283	75	1249	73	1141	67	1237	73
90L11A (2700K-1800K)	11	-	-	830	75	945	86	920	84	851	77	918	83
90L11A (3000K-1800K)	11	-	-	872	79	993	90	967	88	895	81	964	88
90L17A (2700K-1800K)	17	-	-	1107	65	1261	74	1227	72	1135	67	1223	72
90L17A (3000K-1800K)	17	-	-	1164	68	1326	78	1291	76	1194	70	1287	76
90T17A (4000K-1800K)	17	-	-	798	47	917	54	896	53	811	48	910	54
90T17A (5000K-2700K)	17	-	-	791	47	909	53	888	52	803	47	902	53

JA8-2022 INDICATED BY SHADING

UNIFIED GLARE RATING

10° OPTIC FIELD REDUCER	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
>19	<16	<10	<10	<10	<16

MEDIA LIGHT LOSS MULTIPLIER

MEDIA	LIGHT LOSS FACTOR
No Lens	1.05
CGL	1.00
SFL	1.00
FGL	0.85
FSFL	0.82
FLSL	0.78
HCL	0.75
SFL W/ HCL	0.68
FGL W/ HCL	0.47

OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.000
3500K	1.03
4000K	1.08


TUNABLE WHITE MULTIPLIER

CCT	5000K-2700K	4000K-1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

MONOPOINT CM1 HANG STRAIGHT


WARM DIM PERFORMANCE - SOFT FOCUS LENS - 25° OPTIC

INCANDESCENT PROFILE							
90L11AWL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2700	2700	2600	2200	1900	1800
Light Output (Lm)	920	736	644	460	184	92	18
Power (W)	11	8.8	7.7	5.5	2.2	1.1	0.2
Efficacy (LPW)	84	84	84	84	84	84	84
90L17AWL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700K	2700K	2700K	2700K	2500K	1950K	1800K
Light Output (Lm)	1227	982	859	614	245	123	25
Power (W)	22	17.6	15.4	11	4.4	2.2	0.4
Efficacy (LPW)	72	72	72	72	72	72	72

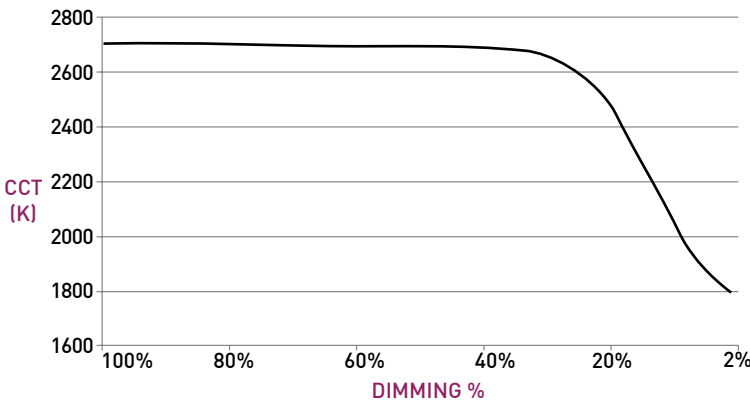

NOTE: LIN-TO-LIN 0-10V PAIRING NOT COMPATIBLE WITH WARM DIM.

HALOGEN PROFILE							
90L11AWD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	3000	3000	3000	2500	1900	1800
Light Output (Lm)	967	774	677	484	193	97	19
Power (W)	11	8.8	7.7	5.5	2.2	1.1	0.2
Efficacy (LPW)	88	88	88	88	88	88	88
90L17AWD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000K	3000K	3000K	3000K	3000K	2150K	1800K
Light Output (Lm)	1291	1033	904	646	258	129	26
Power (W)	22	17.6	15.4	11	4.4	2.2	0.4
Efficacy (LPW)	76	76	76	76	76	76	76

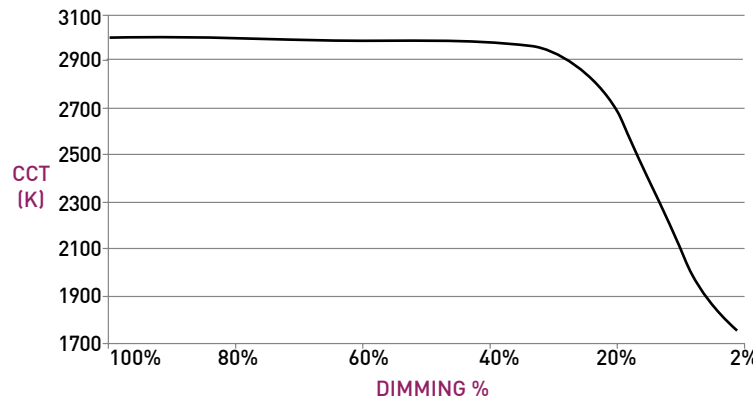


MONOPOINT CM1 HANG STRAIGHT

MONOPOINT

- A STEM**
Standard length is 3", also available in 24" and 48" lengths. All lengths excepts 3" are field cuttable. Powdercoat finishes standard, consult factory for Alumina finishes.
- B BODY**
Available in powdercoat and Alumina finishes. Power supply integrated into fixture body.
- C OPTICS**
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
- D 10° FIELD REDUCER**
Soft Focus Lens, Honeycomb Louver, and Field Reducer provided with 10° optic. Reduces field angle by 30%.
- E MEDIA**
Soft Focus Lens standard. Wet location media sealed in place.
- F BAFFLE**
Accepts 2 media devices. Baffle minimizes aperture glare and conceals view into fixture. Powdercoat finishes standard, consult factory for Alumina finishes.
- G HANG STRAIGHT CANOPY**
Features hidden ball joint that accomodates installations on up to 12/12 (45°) sloped ceilings.
- H ADJUSTABILITY**
Features locking 90° tilt and 365° rotation. Stem features 45° tilt to accommodate up to 12/12 slopes.

DIMENSIONS / DRAWINGS

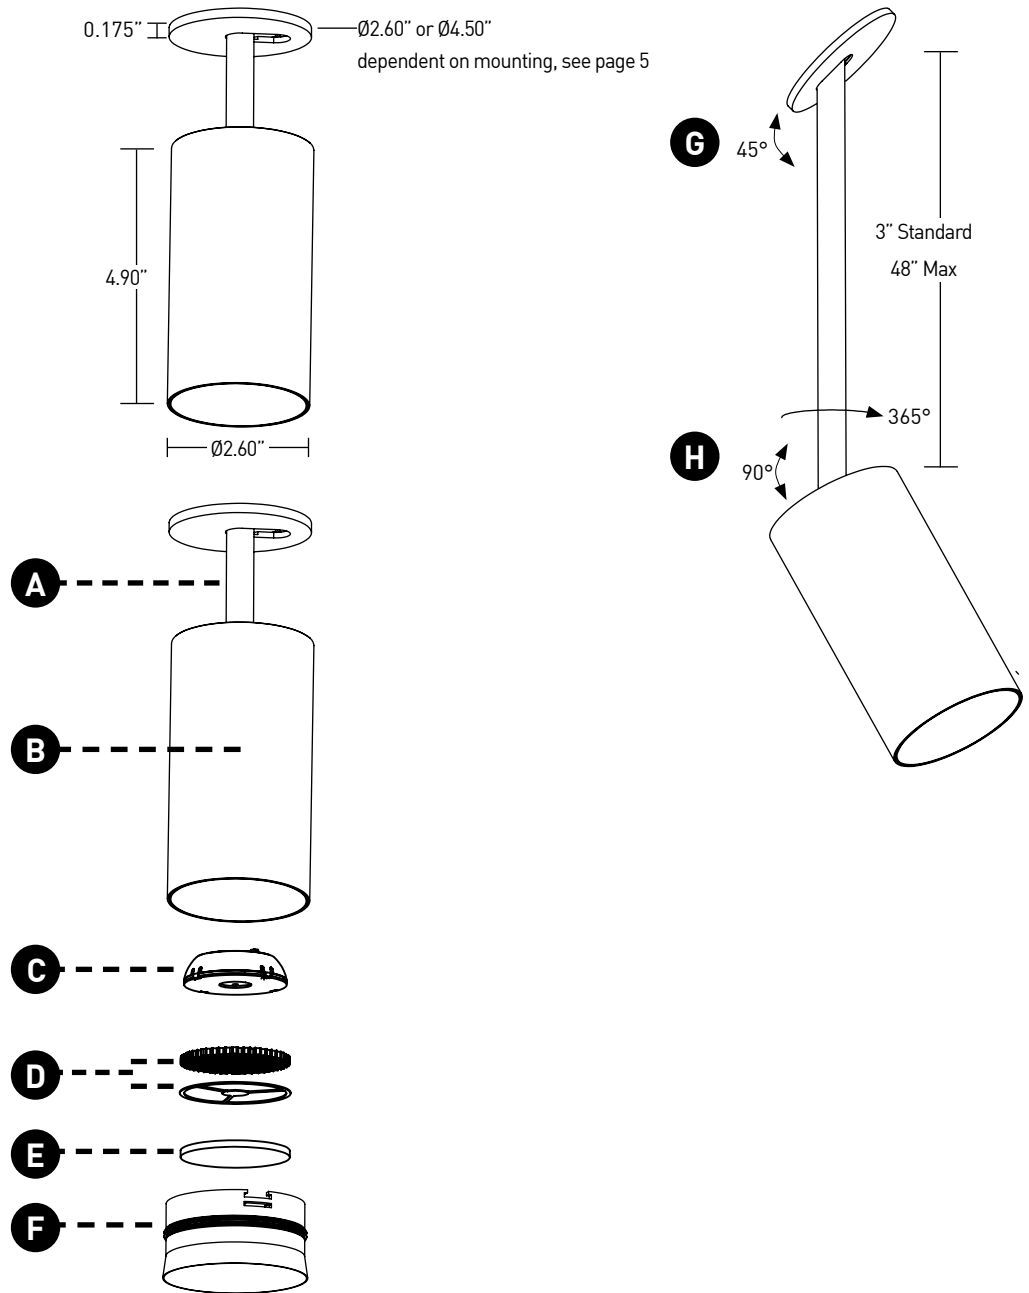

MONOPOINT CM1 HANG STRAIGHT

MOUNTING

IMPORTANT: Fixture cannot be installed with pancake junction boxes.

I JUNCTION BOX MOUNTING PLATE

Mounting plate (concealed) for standard 4" square or 4" 4/0 j-box. To be installed during rough-in, prior to substrate, for ceiling thicknesses up to 0.75". Fixture to mount flush with minimalist transition to ceiling.

Part Number - CMHS-JBMP

J ZERO-SIGHTLINE DRYWALL

Provided with mud-in appliqué that mounts to standard 4" 4/0 junction box. Allows fixture canopy to be recessed into ceiling for a flush or zero-sightline aesthetic. Standard plaster stop thickness of 1/16". Not recommended for stucco applications.

Part Number - DLA-APP-CMHS

K REMODEL / FLANGE OVERLAY

Provided with oversized canopy and mounting plate for standard 4" square or 4" 4/0 junction boxes. Ideal for existing applications and features oversized 4.5" canopy to cover standard 4" octagon box cutout.

L ZERO-SIGHTLINE MILLWORK


Mounting plate (concealed) for standard 4" square or 4" 4/0 junction boxes. To be installed during rough-in prior to substrate. Router guide, specified separately, required to make surface bore allowing fixture canopy to be recessed into ceiling for a flush or zero-sightline aesthetic.

Part Number - CMHS-JBMP


Router Guide Part Number - CMHS-RTG

DIMENSIONS / DRAWINGS



I JUNCTION BOX MOUNTING PLATE

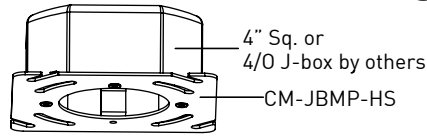



INSTALL JBMP BEFORE CEILING

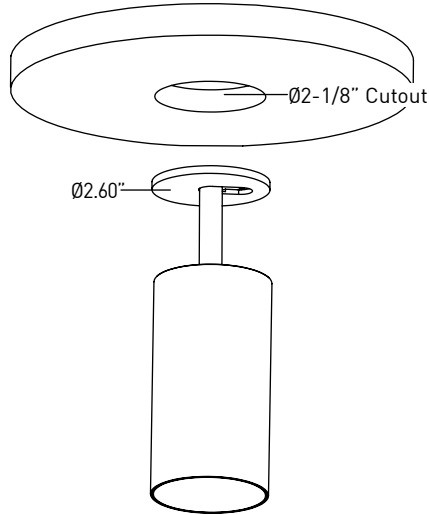


J ZERO-SIGHTLINE DRYWALL

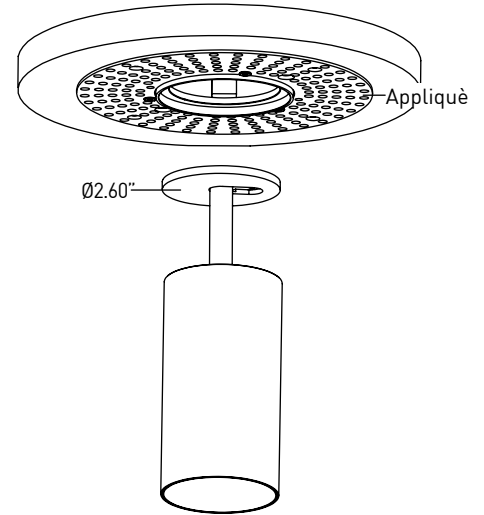



K REMODEL / FLANGE OVERLAY

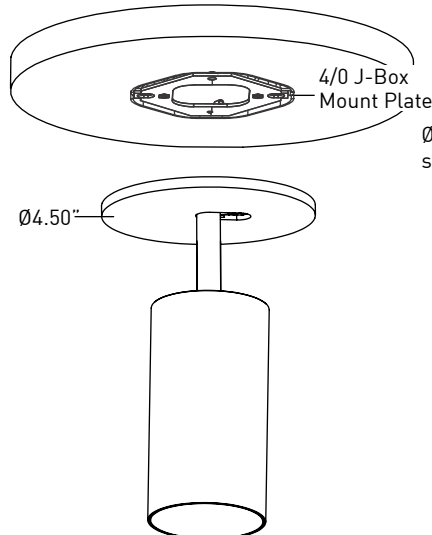

L ZERO-SIGHTLINE MILLWORK

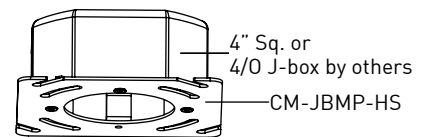

INSTALL JBMP BEFORE CEILING

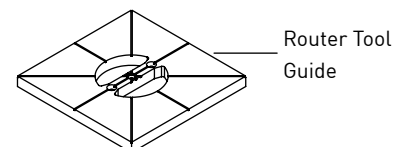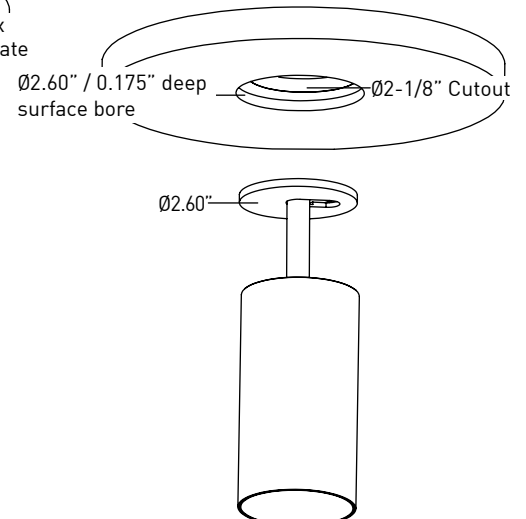

MONOPOINT CM1 HANG STRAIGHT

REMOTE POWER SUPPLY

- M** Remote power supply provides additional driver options. See page 8 for maximum allowable wiring distance. Must be installed in an accessible location.

- N** **ATHENA / CASAMBI CONTROL**
Controls integrated into remote driver assembly. All equipment is serviceable.

Athena Model Numbers: A-WN-D01-RF-BL & DFC-OEM-DBI


Casambi Model Number: BT-S1E1-5400

- O** **ATHENA / CASAMBI EM SHUNT**
Included with drivers specified as ASR, ATR, CSR, or CTR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.


Model Number: PS-RMT-SHUNT

DIMENSIONS / DRAWINGS


M

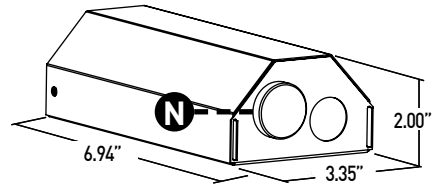

O

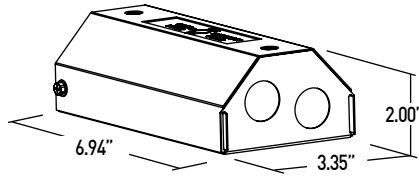

**ATHENA / CASAMBI
EM SHUNT**



MONOPOINT CM1 HANG STRAIGHT

TECHNICAL

CONSTRUCTION

Monopoint: Machined aluminum body; painted finishes are granulated powder coat; Alumina finishes are anodized aluminum.

Remote Power Supply: 22 Gauge galvanized steel.

Appliqué: Machined Aluminum

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. 3-step MacAdam ellipse LED module available in 90+ CRI configurations in color temperature of 2400K. Average rated lamp life of 50,000 hours.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours.

TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE			ECO								0-10V		DALI-2		ATHENA		CASAMBI	
Power Supply	CE/RE	LH	LP	CA/RA	SG	SN	EG	EN	DG	DN	ED	DD	AS	AT	CS	CT			
Minimum °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	0.1%	2.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For LH, LP, SG, SN, EG, EN, DG, and DN drivers consult chart on page 9 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
RA, RE	-	164'	105'	66'	40'
SG, SN	285'	180'	113'	71'	45'
LH, LP	60'	40'	25'	15'	-
EG, EN, ED, DG, DN, DD, AS, AT, CS, CT	-	-	118'	72'	46'

LISTING

cTUVus listed to UL1598 standard for Dry / Damp locations. Title 24 JA8-2022 Listed. NEMA 410 Compliant.

DECLARE

LBC Red List Approved.

BUY AMERICA ACT

All CM1 Hang Straight fixtures are BAA compliant.

LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. [Consult website for full warranty terms and conditions.](#)

CHANGE LOG

- 02/13/2024: ADDED TUNABLE WHITE OFFERING.
- 03/18/2024: UPDATED 10 DEGREE NARROW BEAM TO UTILIZE FILED REDUCER.
- 07/15/2024: REMOVED L2 DRIVER OFFERING.
- 09/19/2024: UPDATED WITH NEW BAFFLE DESIGN.
- 05/07/2025: UPDATED WARM DIM OFFERING.



MONOPOINT CM1 HANG STRAIGHT

DIMMING COMPATABILITY

PHILIPS DRIVER COMPATIBILITY

Power supply SG Manufacturer	Family/Model #
Lutron Electronics	DVTV plus PP-DV
Lutron Electronics	DVSCTV plus PP-DV
Lutron Electronics	DVSTV
Lutron Electronics	DVSCSTV
Lutron Electronics	QSGRJ-XP plus GRX-TVI
Lutron Electronics	QSGRJ-XE plus GRX-TVI
Lutron Electronics	QSGR-XE plus GRX-TVI
Lutron Electronics	NFTV plus PP-DV
Lutron Electronics	NTSTV
Lutron Electronics	RMJ-5T
Lutron Electronics	RMJS-8T
Lutron Electronics	FCJS-010
Leviton	IllumaTch IP7 series
Philips	Sunrise - SR1200ZTUNV

LUTRON DRIVER COMPATIBILITY

Power supply LH / LP Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _ E (wireless)
GRAFIK Eye QS control unit	QSGR- _ E
Homeworks QS control unit	QSGR- _ E
Quantum Hub	QP2- _ _ 2C
Quantum Hub	QP2- _ _ 4C
Quantum Hub	QP2- _ _ 6C
Quantum Hub	QP2- _ _ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	LQSE-2ECO-D



eldoLED DRIVER COMPATIBILITY

Power supply EG, DG Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Creston®	GLX-DIMFLV8
Creston®	GLXP-DIMFLV8
Creston®	GLPAC-DIMFLV4-*
Creston®	GLPAC-DIMFLV8-*
Creston®	GLPP-DIMFLVEX-PM
Creston®	GLPP-1DIMFLV2EX-PM
Creston®	GLPP-1DIMFLV3EX-PM
Creston®	DIN-A08
Creston®	DIN-4DIMFLV4
Creston®	CLS-EXP-DIMFLV
Creston®	CLCI-1DIMFLV2EX
Power supply EN, DN Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nI0 EZ
ABB	SD/S 2.16.1

ANALOG DRIVERS AND DIMMERS

