MICHAELANASTASSIADES

INSTALLATION INSTRUCTIONS



BRASS ARCHITECTURAL COLLECTION CAP, WALL/CEILING MOUNTED, 2023

PRODUCT SPECIFICATIONS

Bulb specifications: 120V / 240V

Integrated LED 3.8W

120V / 240V dimmable LED 1-10V

Product weight: 1kg

120V version supplied with paintable junction box cover.

IP 20: Indoor Use Only (suitable for bathroom Zone 3)

BEFORE INSTALLING

Please keep these instructions for future reference. Please read instructions in full prior to installation noting all illustrations. Instructions should be followed precisely.

If in any doubt about electrical safety, contact a qualified electrician.

Installation should always be carried out by a qualified electrician or a competent person in accordance with your current electrical regulation.

The electricity supply should always be isolated at its source (fuse box) before attempting any installation or maintenance. Please do not fit bulbs exceeding the maximum allowable wattage.

Ensure the circuit, to which the fixture is to be connected, has been installed and fused in accordance with your local electrical standards

If the external flexible cable or cord is damaged, it should be replaced exclusively by MICHAEL ANASTASSIADES or a similar qualified person to avoid a hazard.

Please see the latest IEE Wiring Regulations for full details.

If a bulb requires replacement, always switch off the mains power and allow the fixture to cool

Position the fixture where desired, ensuring that the area is suitable to support the weight of the fixture.

Determine the fixing method appropriate to the surface material.

Modifying any part of the fixture will void the products warranty.

MICHAEAL ANASTASSIADES takes no responsibility for incorrectly installed lights & recommends that all fixtures should be installed by a qualified electrician.


CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.

Polished brass: As the item is unlacquered it will naturally oxidise and darken. Upon touching the items without gloves, fingerprints are likely to occur and leave marks. Use a good quality brass cleaning liquid and follow the product instructions using the extra soft dust cloth. Do not apply pressure on persistent marks.

Remove them using repeated gentle motions and by reapplying the brass cleaning liquid.

Parts Supplied

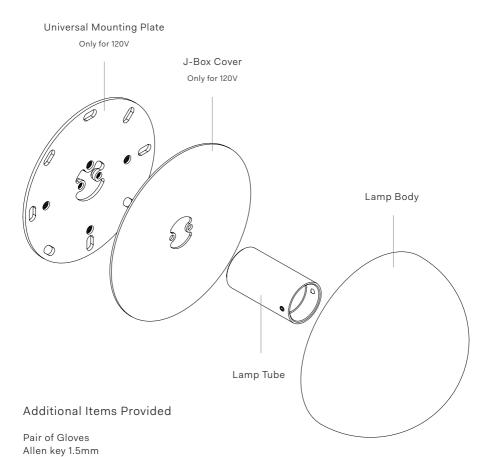


INSTALLATION PREPARATION

Whilst installing the fixture, please take care and use the gloves provided.



Turn off the electrical supply at the fuse box.



Use the guide below to ensure you follow the instructions that are relevant to your fixture.

Cap, Wall/Ceiling Mounted, 240V	Fig.1	Fig.2	Fig.7	Fig.8			
Cap, Wall/Ceiling Mounted, 120V	Fig.3	Fig.4	Fig.5	Fig.6	Fig.7	Fig.8	

Fig.1 For 240V Fittings

Mark fixing holes (A) by placing the Tube (C) over electrical mains.

Please ensure the drill holes are not aligned with the route of the cables in the wall/ceiling prior to drilling.

Drill at the location of the markers so that the holes are large enough to accomodate the wall anchors.

Insert wall anchors (B) into place.

Pull the wires through the central hole of the Tube (C).

Place the Tube on to the wall/ceiling and secure in place using the screws (D).

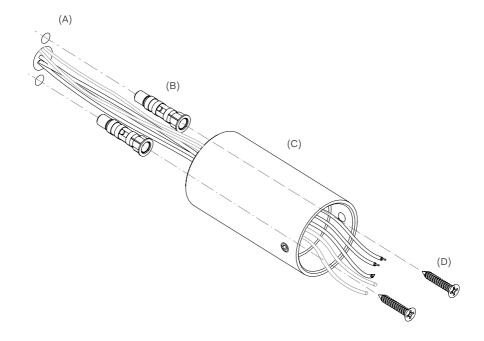


Fig. 2 For 240V Fittings

Connect the wires of the Lamp Body (G) with the mains and dimming wires using the connectors.

Gently push the connectors inside the Tube (C).

Go to Fig.7 for next step


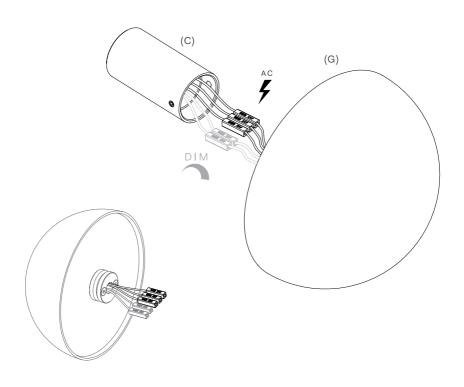




Fig.3 For 120V Fittings

Put the driver inside the Junction box and connect the electrical mains Live and Neutral wires to the driver input wires using the connectors.


Pull the driver output and dimming cables through the Universal Mounting Plate (E). Screw the Universal Mounting Plate to the junction box.

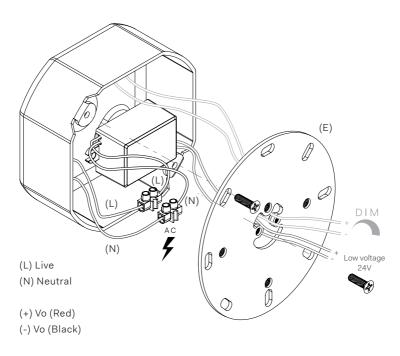

- (+) DIM (Purple)
- (-) DIM (Pink)

Fig.4 For 120V Fittings

Feed the wires from the Junction Box through the central hole of the Junction Box Cover (F).

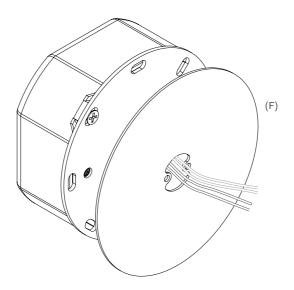

Paint over the J-box cover to match the wall/ceiling finish.



Fig.5 For 120V Fittings

Screw the Tube (C) to the Junction Box Cover (F) and pull the wires through.

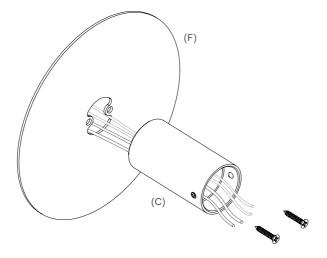


Fig.6 For 120V Fittings

Connect the wires of the Lamp Body (G) with the low voltage driver output and dimming wires using the connectors provided.

Gently push the connectors inside the Tube (C).

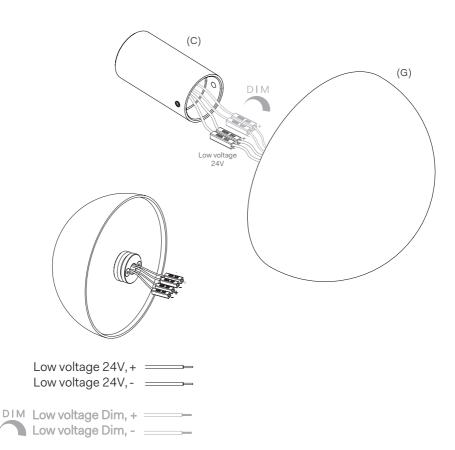


Fig.7

Insert the Lamp Body (G) into the Tube (C) and use the grub screws to secure in place.


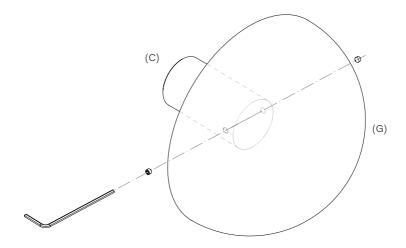


Fig.8

Your fixture is now finished.



Michael Anastassiades' design philosophy is to preserve the inherent qualities of given material. All of our products are handmade and come in natural finishes, exposed to the elements without any protective lacquers. We look at oxidisation as part of a process that adds to the patina of an object, increasing beauty with time. We try our best for all goods to leave our premises in pristine condition, but sometimes products may arrive with minor oxidisation marks.

Whilst every effort is made to ensure accurate representation of product colours, finishes and dimensions, Michael Anastassiades Ltd reserves the right to alter these details without notice, in compliance with its own production needs, technological changes or in response to the current market needs. Colour swatches are for reference only; Michael Anastassiades Ltd cannot guarantee exact colour match for any product finishes.

All designs are protected under copyright law. Michael Anastassiades holds the exclusive manufacturing and distribution rights worldwide. Copying will be prosecuted.

All light fixtures in this catalogue have CE marking compliance.

Michael Anastassiades Ltd.
50 Rochester Place, London NW19JX
T +44 (0)20 7928 7527
sales@michaelanastassiades.com
www.michaelanastassiades.com
© 2024 Michael Anastassiades Ltd. All rights reserved.