



2"

45360 TRIMLESS SQUARE FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

2 7/8"

2 7/8"

Driver

included

Box

TYPE:		
DATE:		
NOTES:		



2700K . 3000K . 3500K . 4000K . 5000K

CRI

90+

FINISHES

022- Black

DIMMABLE

TRIAC/ELV

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. Mesh plate included.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: ø2 7/8" x 2 7/8".
- Fixture: ø4 1/16" x 5 9/16"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- · Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K
- Delivered Lumen: 853 lm | 917 lm | 993 lm | 1029 lm | 1003 lm

CERTIFICATIONS











ORDERING GUIDE

MODEL	FINISH	_
45360-022 45360-015	Black White	

PRODUCT DIMENSIONS

WATTS

15W

LUMENS

Up to 1029



KELVIN

CCT Selectable





ADJUSTABLE

N0


015- White

BEAM

ANGLE

38°

4 1/16"
QUICK
CONNECT
2 1/16"

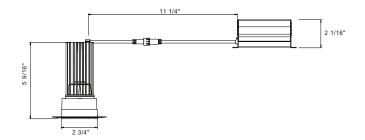

ACCESSORIES



45612-015 60" 3 pin Connector



45599-019 NEW CONSTRUCTION SMASH PLATE2 13/16" x 2 13/16"




NO IC BOX REQUIRED






PHOTOMETRICS


Imperial

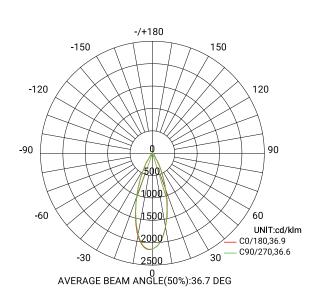


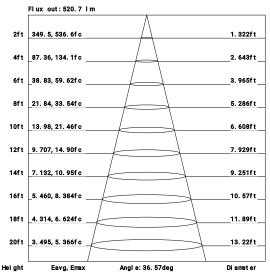

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

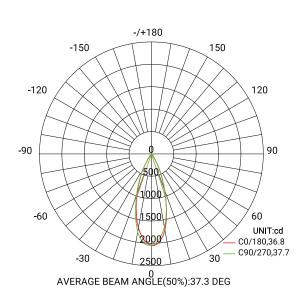

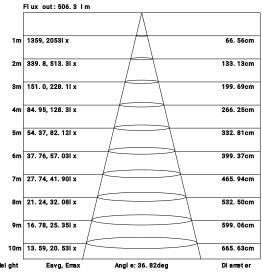

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.