

MIDWAY

RECESSED COLLECTION



3.5" 45369 ROUND REGRESSED GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: $\varnothing 3 \frac{3}{4}$ ".
- Fixture: $\varnothing 4 \frac{3}{8}$ " x 3 1/4"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F) (-20°C~-40°C).

LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin: 27K | 30K | 35K | 40K | 50K
- Lumen: 719 lm | 763 lm | 826 lm | 861lm | 851lm

CERTIFICATIONS




ORDERING GUIDE

MODEL	FINISH
45369-025	Black
45369-018	White

ACCESSORIES




	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\varnothing 3 \frac{3}{4}$ "	12W	Up to 861	CCT Selectable	TRIAC/ELV	90+	38°	30°




FINISHES



PRODUCT DIMENSIONS

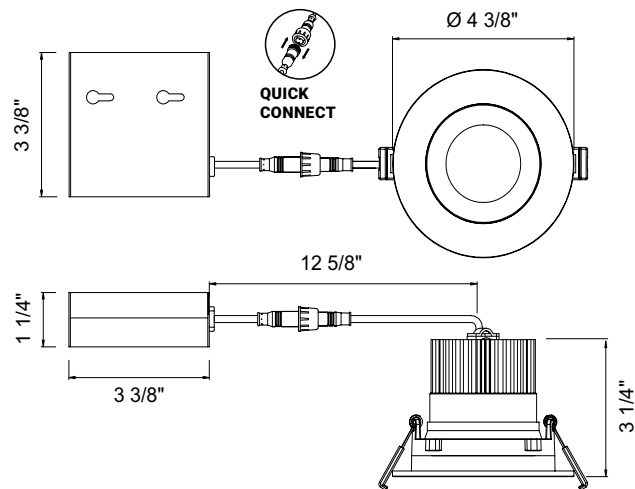




MIDWAY


RECESSED COLLECTION



Imperial

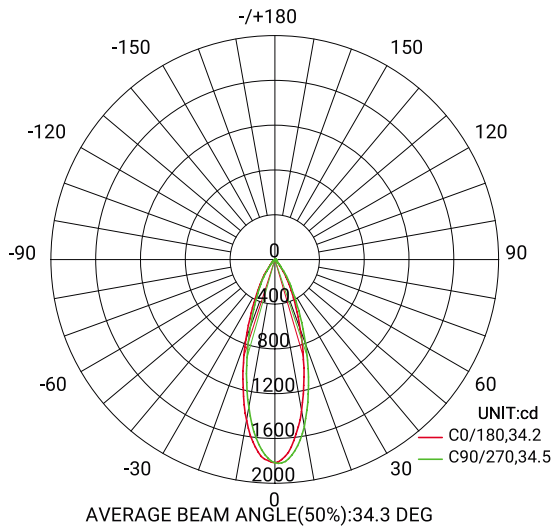


Flux out: 889.9 lm

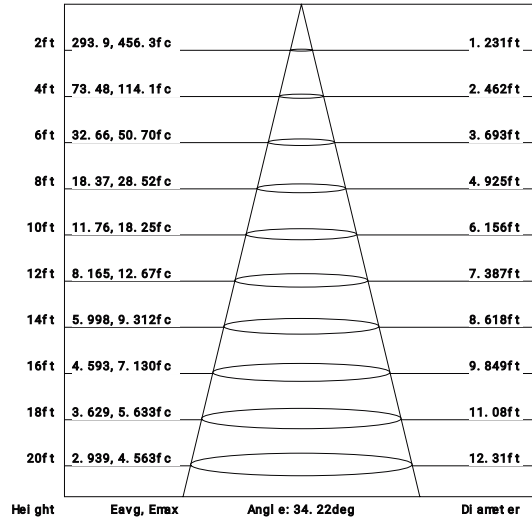


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

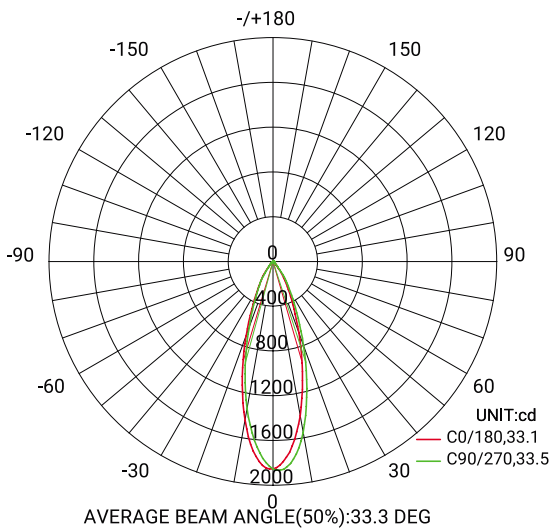

Flux out: 361.0 lm

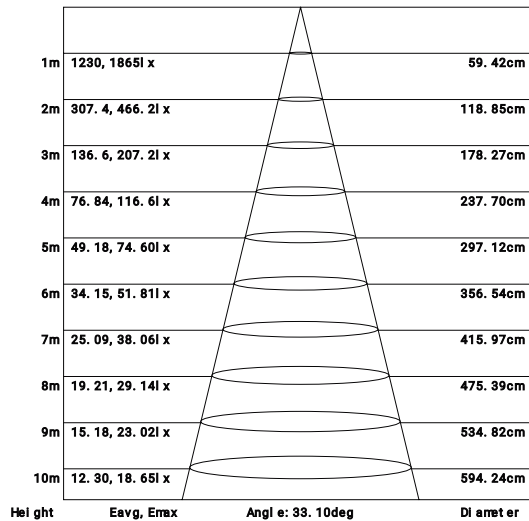

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.