




FILE#: E356487

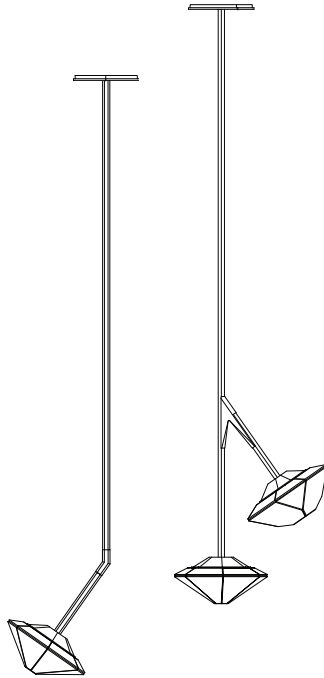

The MYRIAD Pendant Installation Guide

- Certified electrician recommended for electrical installation.
- Terminal Block not included. Installation may require advice from a qualified person.
- Structural blocking or junction box rated at a minimum of 50lbs is required.
- For all LED fixtures, use only with class 2 power unit.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

***IMPORTANT: Please provide email confirmation that your order and its related components have been received in their entirety and in good condition. Failure to do so within 7 days of delivery will waive all product warranties.**

GABRIEL SCOTT

EST 2012



Provided Supplies:


- Myriad Fixture
- Myriad Glass Volumes
- Universal T-bar
- Installation Screws
- LED Driver
- Spare LED chip

Required Tools:

- Screwdriver
 - Allen key
 - Drywall anchor suitable for 25lbs. on ceiling mount
 - 4x 2-pole Wiring Terminals, screw or screwless, 12-18AWG (1.0-2.5mm²), rated for 600V, 15A - EX: WAGO 222-412-
- Requires LED driver; Input: Local Line Voltage, Output 12Vdc SELV, 5A, Max 60 Watt, Class 2 LED Driver.


**STEP
1**

Shut-down associated electrical breaker and wire LED driver to power source. Then secure driver in junction box using provided universal T-bar.

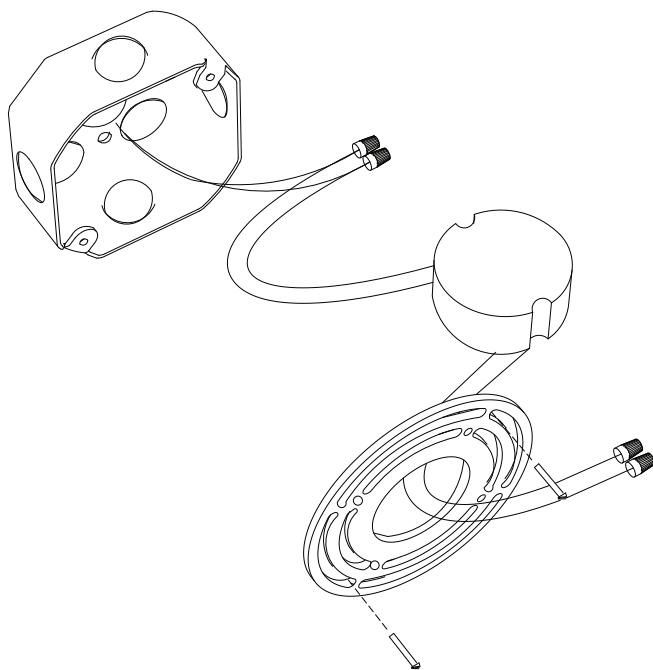


**STEP
2**

Pass the wires through the stem and canopy then attach the stem to the canopy with the provided nut.

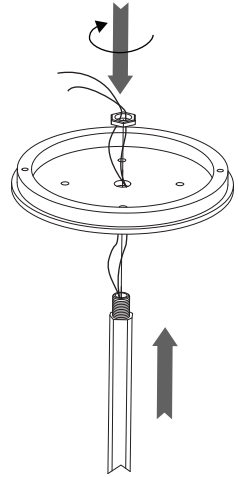


**STEP
3**

Using wire terminals connect the LED driver to the Myriad fixture. On Gabriel-Scott fixtures, the black wire(+) is positive and the white wire(-) is neutral. Finally, attach the fixture to the universal T-bar by screwing in the canopy with the provided screws.

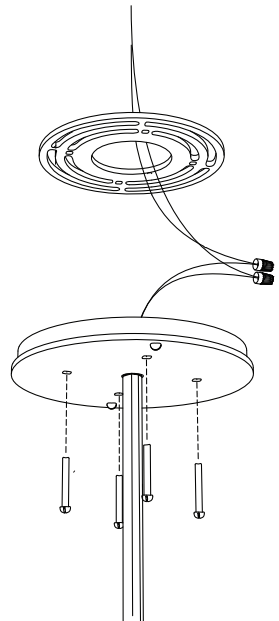


STEP
4

Slide the glass volume over the LED body.




STEP
5

Tighten the two set screws on the Myriad Glass volume so that the set screws land in the slots on the LED body.

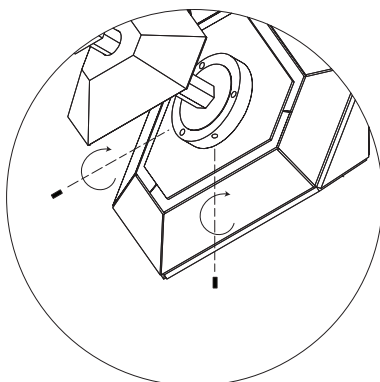

STEP
6

Remove the protective mesh holding the cap and collar and slide them carefully down against the Myriad Glass volume assembly. Tighten the set screw on the collar.



e: info@GabrielScott.com

t: (646) 783-3770