B.lux

MARC C

David Abad

C70 LED: LED 10,5W 1670lm 450mA 3000K CRI80 120V 50-60Hz
C130 LED: LED 21W 3340lm 450mA 3000K CRI80 120V 50-60Hz
C160 LED: LED 26,2W 4180lm 450mA 3000K CRI80 120V 50-60Hz

IP20 Clase I

1

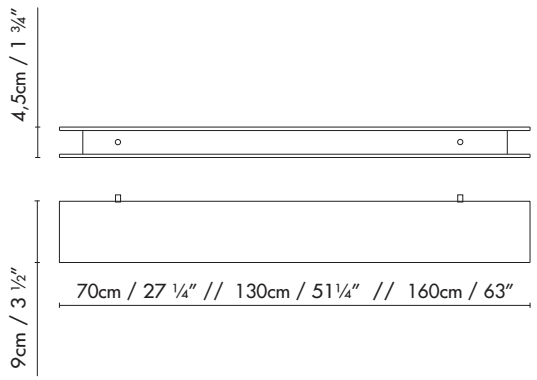

2

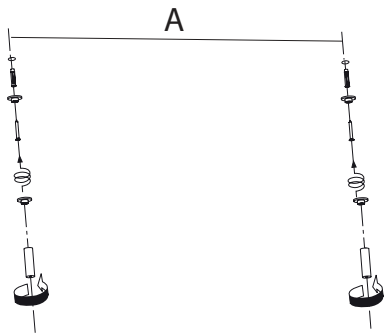

C70 A: 50 cm
C130 A: 110 cm
C160 A: 1400 cm

1. General dimensions of the lamp.
2. Position and fixe the base brackets to the ceiling using the plugs and screws provided. Screw the spacing brackets into the previously fixed base.
3. Connect the lamp as shown in the diagram.
4. Attach the body of the lamp to the previously fixed brackets.

3

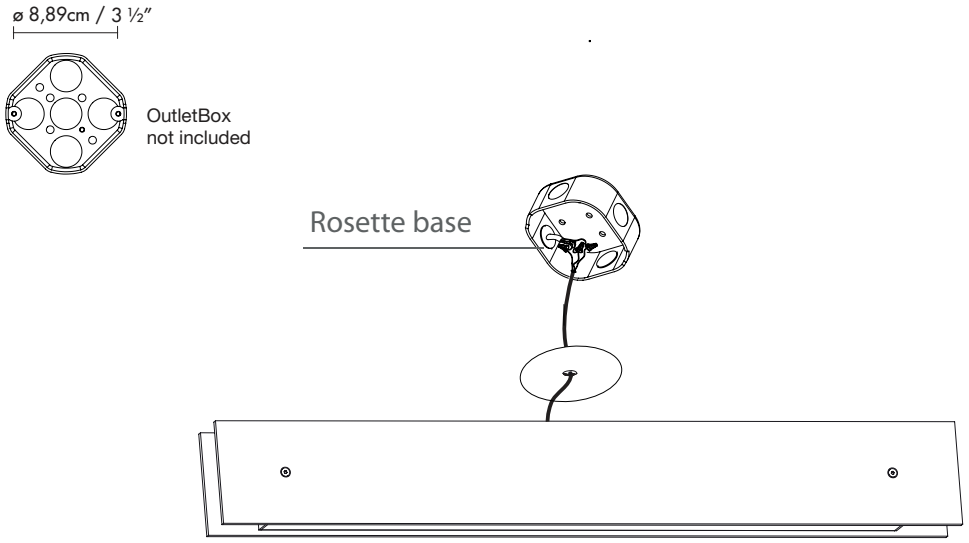

4

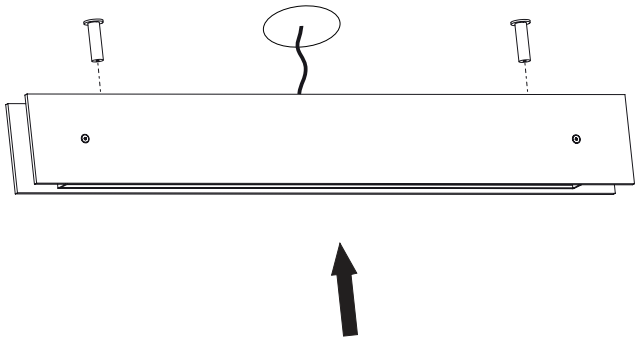

Consumer information:

- Lamps without the IP mark are classed as IP20 and are designed for general interior use, except wet areas (bathrooms, etc.)
- Lamps with the IP mark are designed for exterior use and in wet areas. (E.g. IP54)
- They offer guaranteed protection to people and animals against electrical discharge:
  - Class I: through single electrical insulation and an earthing conductor once correctly connected.
  - Class II: through double electrical insulation.
  - Class III: these kinds of lamps should be connected at very low voltage levels (generally 12V); therefore there is no risk.
- Lamps with this symbol, or without any symbols, can be mounted directly onto normally inflammable surfaces.
- Lamps with this symbol cannot be mounted directly onto normally inflammable surfaces.
- The safety of this lamp is guaranteed by using a maximum wattage bulb that does not exceed the figure displayed visibly on the lamp.
- The product cannot be treated like conventional domestic waste; it must be taken to the corresponding recycling point for electrical and electronic equipment.

Assembly instructions

B.lux

B.LUX S.A.
Pol. Ind. Okamika, pab. 1
48289 Gizaburuaga (Bizkaia) Spain
T.(+34) 94 682 72 72
F. (+34) 94 682 49 02
info@grupoblux.com
www.grupoblux.com