MOSER



The fixture emits diffused light and the thickness of the glass results in a very comfortable light distribution.



Anu Moser

Born in 1945, Anu Moser is a Swedish ceramic artist and specialist in restoring ceramics – a skill she also teaches. Anu Moser has held exhibitions of her ceramic art all over the world.

2/6 Moser



Sommerhus Liseleje



Yokohama College of Dental Care and Health Sciences

Product info

Information

Electrical: System Wattage: 15W LED Wattage: 14 W Delivered lumens: 664 Efficacy: 44.3 Im/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Mounting

Canopy: White. Cord type: 3-conductors, 18 AWG white PVC power cord. Cord length: 12'.

Finish

Matte white opal.

Materials

Suspension: Polished aluminum. Shade: hand blown matte white opal glass.

Sizes and weight

Width x Height x Length (in.) | 8.1 x 11.2 x 8.1 Max 3.3 lbs | 7.3 x 10 x 7.3 Max 2.8 lbs | 9.8 x 14.1 x 9.8 Max 4.2 lbs

Compliance

cULus, Damp location.

Specification notes

a. Incandescent and LED light sources only available in 120V. b. 15W LED light source only available in 7.3" or 8.1" dimension. c. 22W LED light source only available in 9.8" dimension. d. 22W LED light source only available in 9.8" dimension.

Light source

A-19/medium

Information

Electrical: System Wattage: 15W LED Wattage: 14 W Delivered lumens: 664 Efficacy: 44.3 Im/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.





Product variants

Dimension	Light source	Voltage frequency
7.3 IN	A-19/medium	120V
8.1 IN		

Product description

Moser pendant draws inspiration from the drop of hot glass when taken from the furnace. It is an opal white glass pendant with near-spherical shape. With its closed bottom, light is diffused over its 360° distribution. The glass shade is supported by three large hooks of polished aluminum that enter holes in the top of the glass shade that are protected with black rubber grommets. Available in three sizes.

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White, flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12 feet.

Light description

Light distribution is spherical and 100% glare-free. Direct view of the light source is prevented to eliminate glare.

Design

Anu Moser

Material

Glass shade is matte, opal white, handblown glass 0. 2 IN thick. Canopy is spun aluminum, 0. 03 IN thick. Socket: Porcelain, medium base for A-19 size lamps. Matte opal glass

Weight

Min: 2.829 lbs Max: 4.228 lbs

Dimensions

7.3 IN, 8.1 IN, 9.8 IN

Other functions

louis poulsen


Finish

Matte white opal glass

Voltage

120V

Light distribution diagrams

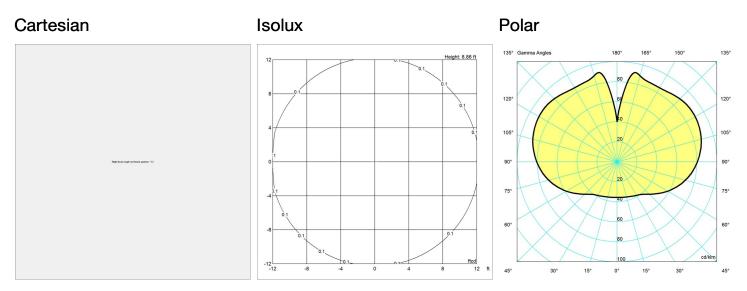

Spare parts & accessories

_	Product	Variant number
	MOSER 185, SPAREGLASS MATT, OPAL	5741086359
	MOSER 205, GLASS MATT, OPAL	5741086388
	MOSER 250, GLASS MATT, OPAL	5741086414
	MOSER PENDANT, GASKETS FOR GLASS(1 SET)	5741087714

5/6

6/6

Moser