NL-3348
3" Wall Wash with Baffle

FEATURES

Trim: Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare with half moon. Non-reflective painted finishes. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°. Separate trim ring available in custom combination of ring finishes (consult factory).

Mounting: Trim includes three trim clips that securely mount trim in housing.

COMPATIBLE HOUSINGS

Compatible with Line Voltage and Low Voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage

50W 120V MR16 GU10 Max. (NH-350AT; NHIC-350AT; NHR-354AT)

Low Voltage

Important: <u>Do not</u> use glass lens (provided) when already using lamp with glass cover 50W 12V MR16 (NL-301 Series; NLIC-301 Series; NLR-304 Series; NLR-305 Series)

LABELS AND LISTINGS

3" Wall Wash with Baffle

NL-3348WW = White Baffle with White Trim

Catalog No.

cULus Listed for Damp Location when used with compatible housing.




Type Project

Catalog No.

Notes

Product Images and Dimensions

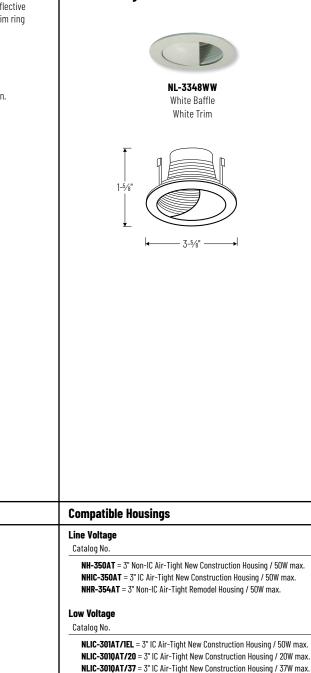

NLIC-3010AT = 3" IC Air-Tight New Construction Housing / 50W max. NL-301AT/IEL = 3" Non-IC Air-Tight New Const. Housing / 50W max. NL-3010AT/20 = 3" Non-IC Air-Tight New Const. Housing / 20W max. NL-3010AT/37 = 3" Non-IC Air-Tight New Const. Housing / 37W max. NL-3010AT = 3" Non-IC Air-Tight New Const. Housing / 50W max. NLR-304AT/IEL = 3" Non-IC Air-Tight Remodel Housing / 50W max. NLR-3040AT/20 = 3" Non-IC Air-Tight Remodel Housing / 50W max. NLR-3040AT/20 = 3" Non-IC Air-Tight Remodel Housing / 37W max. NLR-3040AT/37 = 3" Non-IC Air-Tight Remodel Housing / 50W max. NLR-3040AT = 3" Non-IC Air-Tight Remodel Housing / 37W max. NLR-305AT/20 = 3" Non-IC Air-Tight Remodel Housing / 37W max. NLR-305AT/37 = 3" Non-IC Air-Tight Remodel Housing / 37W max. NLR-305AT/37 = 3" Non-IC Air-Tight Remodel Housing / 37W max.

Example: NL-3348WW = 3" Wall Wash with White Baffle and White Trim

