


hollis+morris



**oyster
sconce**

product installation + specifications

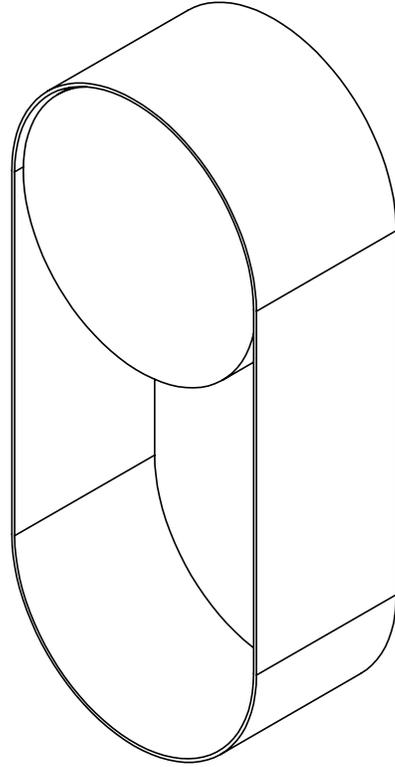

oyster sconce

product code:
OSTRsconce

materials:

- + metal
- + acrylic
- + COB LED

finish:

- + powder coated or plated steel
- + frosted or patterned acrylic

input:


- + 120V 50/60 Hz (Canada + US)

output:

- + 8 W
- + 3000K with CRI of 95 or higher
- + 800 Lms

mounting:

- + junction- box connection
- + single driver connection

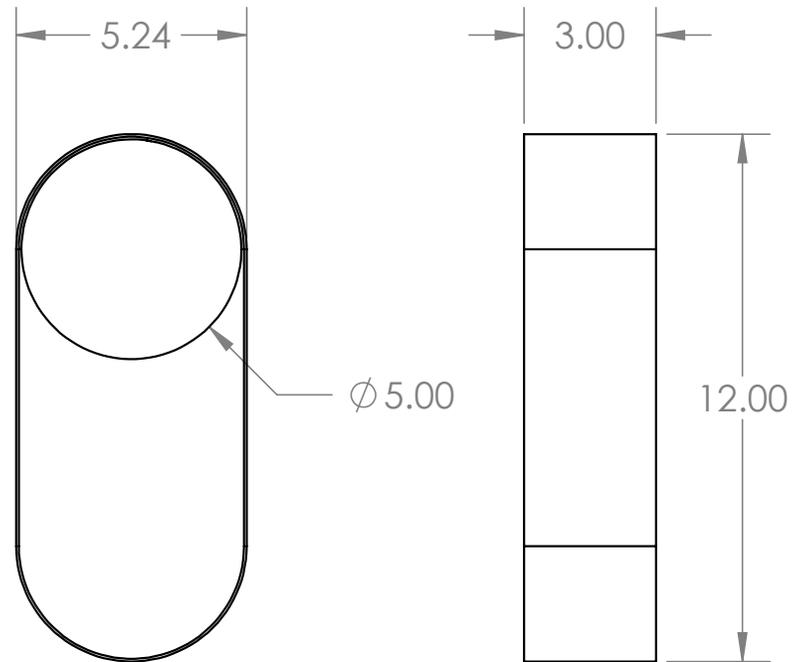


certification:



hardware + installation

1. Feed wires through universal junction plate and have a certified electrician connect the fixture to 120V power.
2. Fasten the junction plate to the junction box using the round head 8-32 screws.
3. Mount the fixture to the junction plate using the flat head 8-32 screws.

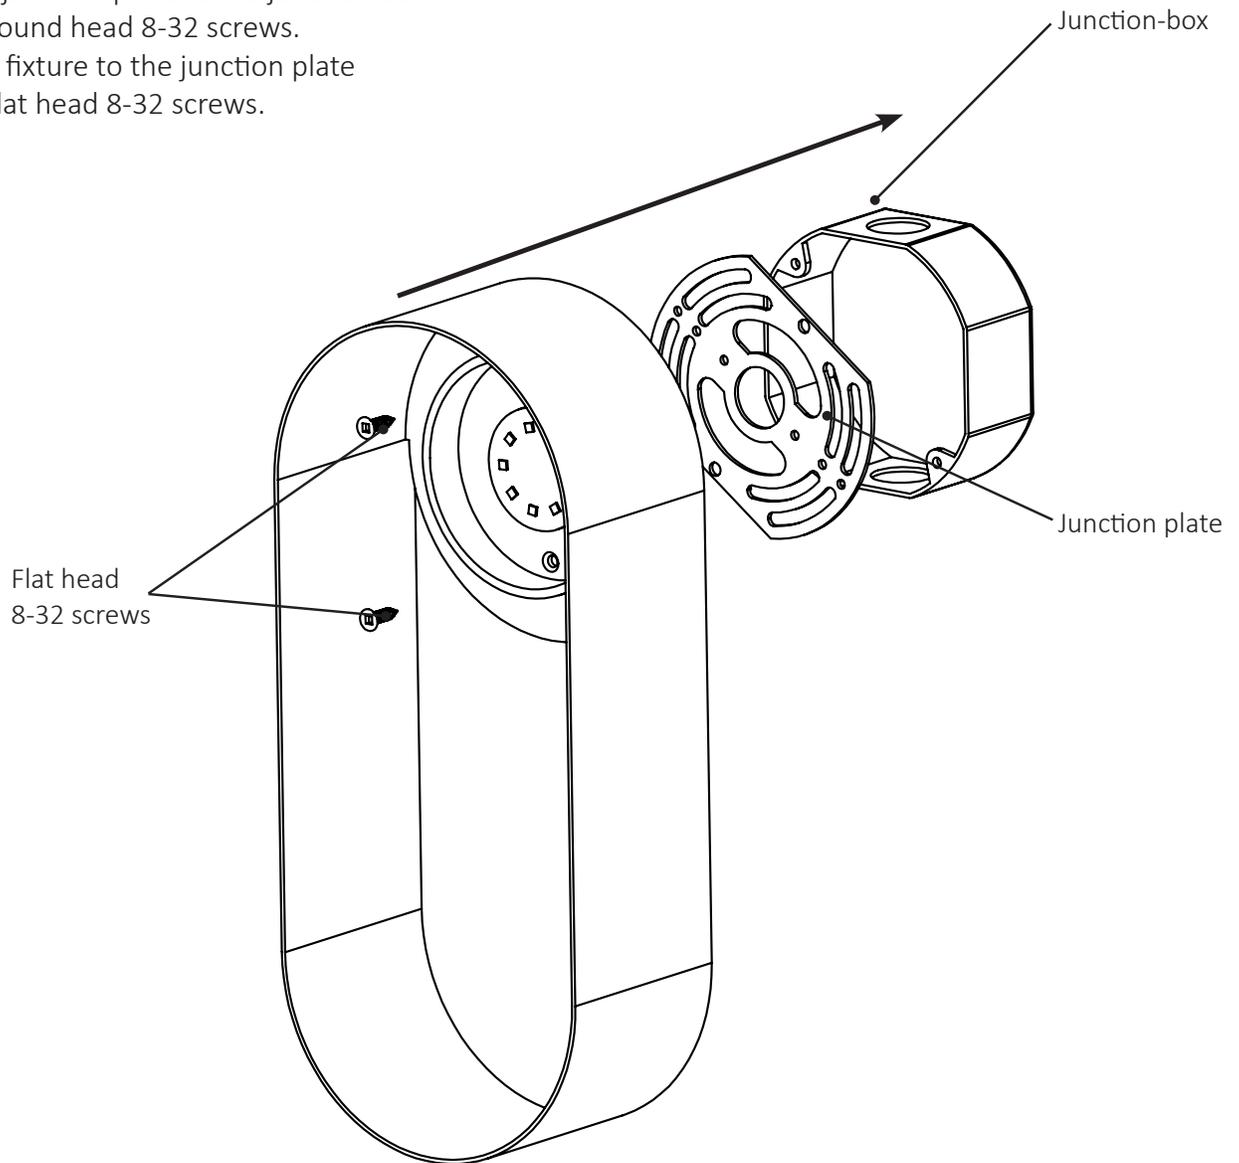

hardware + installation

5. Place the acrylic over the collar with the threaded hole facing the opening of the fixture.
6. Tighten the provided 1/4-20 set screw in until the acrylic is securely in place.

