

WAC LIGHTING

Tube Pendant Downlight

Ceiling Mount 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-W2605 5"	3000K 90	16W	1188 800	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: **PD-W2605-AL**

DESCRIPTION

Precision engineered using advanced proprietary LED technology with a built-in reflector. An appealing cylindrical profile with powerful LED lighting is perfect for accent downlighting applications. Five architectural metallic finishes offered.

FEATURES


- Hang-straight swivel
- Three 12" and one 6" down rods included
- Title 24 may not be available for all finishes, check for availability
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	16W
Input:	120-277V, 50/60Hz
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box
Finish:	Powder Coat White:White, Powder Coat White::Graphite, Powder Coat White:::Brushed Aluminum, Powder Coat White:::Black, Powder Coat White:::Bronze
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



FINISHES:

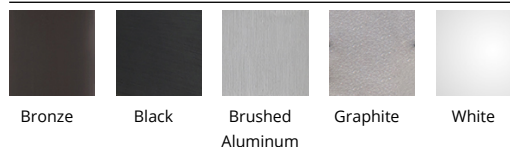

LINE DRAWING:

