

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #PER-10405-GA




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 5 - Cand. Bulb
 40 Watts Recommended 60 Watts Max

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

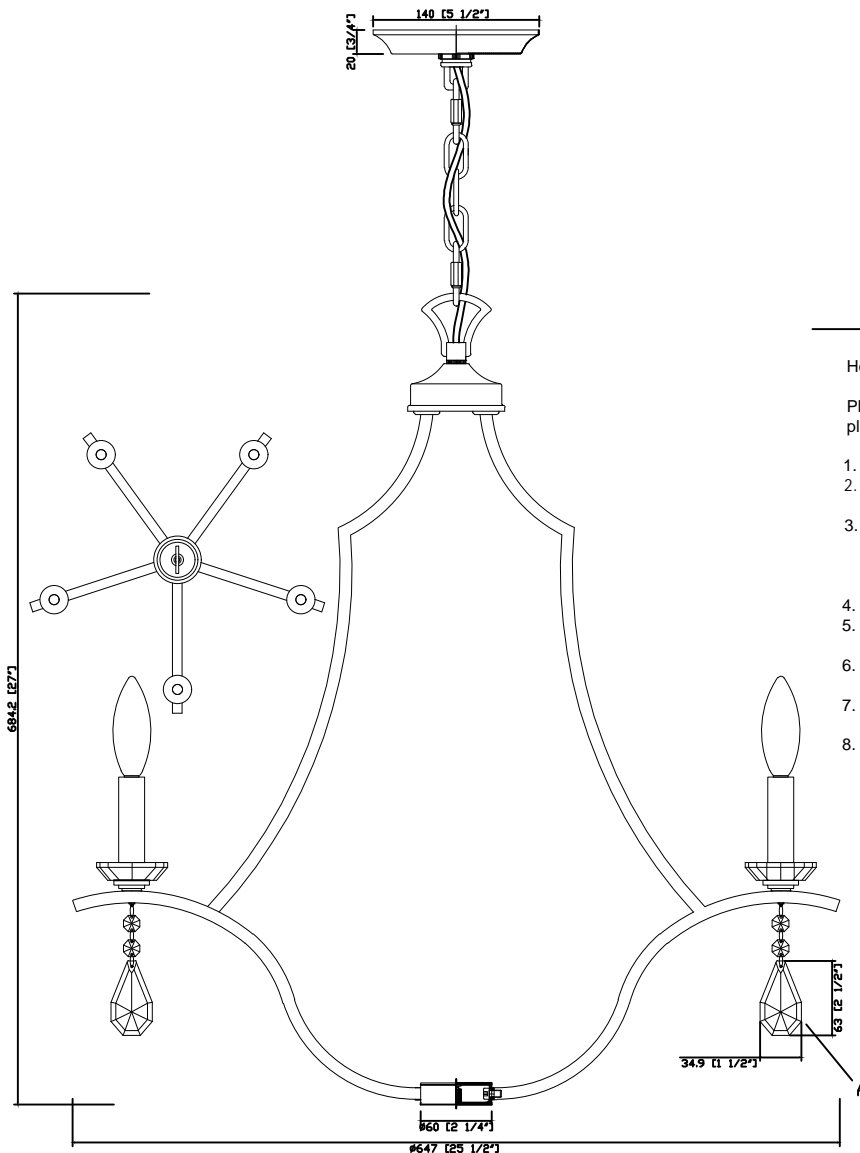

A 5 Sets= (2)X14MM+(1)X63MM

How to Install

Place the fixture frame on a soft cloth covered platform before installation of the fixture.

1. Spread the folded arms out equally.
2. Remove the bottom cover plate from the distributor box by twisting it off.
3. Gently insert one arm end into the hole of the distributor box and secure with the hex nut. Repeat for the rest of arms. Put the cover plate back. Be careful not to scratch the distributor box during the assembly of arms.
4. Install the mounting bar onto the outlet box.
5. Decide the preferred hanging height and choose the correct length of chain needed.
6. Raise the fixture up to the ceiling and do the wire connections. Secure canopy to the mounting bar using the screw collar loop ring.
7. Place the candle sleeve over the socket. Slide the crystal bobèche over the candle sleeve.
8. Dress the crystal as illustrated.



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #PER-10405-GA

Part Number

- Part Number
- A. (1) Mounting hardware
 - B. (1) Canopy $\phi 5.5" * H0.75"$
XAR10405GACAN5.5IN
 - C. (1) Screw collar loop
 - D. (1) Chain $\phi 4MM * L72"$
XAR10405GACHA4MM
 - E. (1) Fixture loop
 - F. (1) Fixture frame
 - G. (1) Distributor box $\phi 2.25" * H0.75"$
 - H. (5) Hexnut
 - I. (1) Bottom cover plate
 - J. (5) Candle sleeve $\phi 1" * H3.3"$
XAR10405WHCDL3.3IN
 - K. (5) Crystal bobèche $\phi 2.25"$
XAR10405BOB2.25IN
 - L. (5) Crystal drop (2) X14MM + (1) X63MM
XAR10405CRY2.5IN

