Project name: / Project type: /

PH 3-2 WALL

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of mouth-blown opal three-layer glass, which is shiny on the top and sandblasted matte on the inside, giving a soft and diffuse light distribution.





Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.





Product info

Information

Electrical: System Wattage: 10W LED Wattage: 9 W Delivered lumens: 292 Efficacy: 29.2 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Mounting

Surface: Mounted directly to finished surface over a 4" octagonal junction-box. Switch: On/off switch on the wall plate.

Finish

White opal glass. High lustre chrome plated.

Materials

Shades: Handblown white opal glass. Wall box: High lustre chrome plated, spun brass. Suspension: High lustre chrome plated, spun aluminum. Arm: High lustre chrome plated, brass.

Sizes and weight

Width x Height x Length (in.) | 7.9 x 6.5 x 11.7 Max 6.8 lbs

Compliance

cULus, Dry location.

Light source

E12

Information

Electrical: System Wattage: 10W LED Wattage: 9 W Delivered lumens: 292 Efficacy: 29.2 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

Related products





PH 3/2 Glass Table

PH 3/2 Pendant

Product variants

Light source

E12



louis poulsen.com

Product description

Available without switch on wall box.

PH 3/2 wall is one of the iconic fixtures recognized throughout the world. It is a small-scale pendant of gently sloped glass shades with a lustrous metal socket housing on top. The iconic design is based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of handblown, opal white, three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and uniform light distribution. Part of a family including indoor and outdoor products.


Mounting
Mounted directly to finished surface over a 4" octagonal junction-box. Switch: On/off switch on the wall plate.
Light description
Light distribution is mostly downward with the glass shades casting a soft glow horizontally and upwards. The curvature of the shades and their positions limit the direct view of the lamp to reducing glare. Provided with a candelabra base socket for the customer to provide their desired lamp.
Design
Poul Henningsen
Material
Shades: Handblown white opal glass. Wall box: High lustre chrome plated, spun brass. Suspension: High lustre chrome plated, spun aluminum. Arm: High lustre chrome plated, brass.
Weight
6.795
Other functions

louis poulsen louispoulsen.com

Finish

White opal glass

Light distribution diagrams

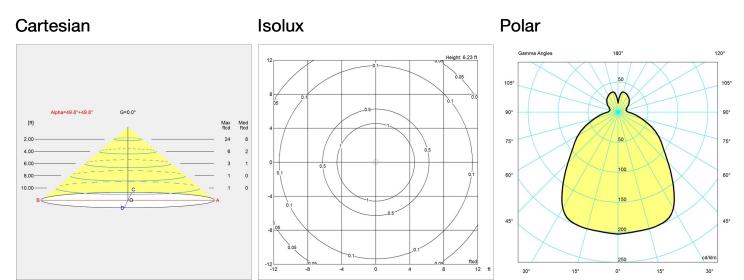

Spare parts & accessories

Product	Variant number
PH 3-2, MIDDLE SHADE, GLASS	5741481598
PH 3-2, LOWER SHADE, GLASS	5741481608
PH 3-2 TABLEWALL, TOP SHADE, GLASS	5741481585

louis poulsen.com