


# Print Flush Mount

12729 rA

Low Voltage Input

Note: External power supply may be required.

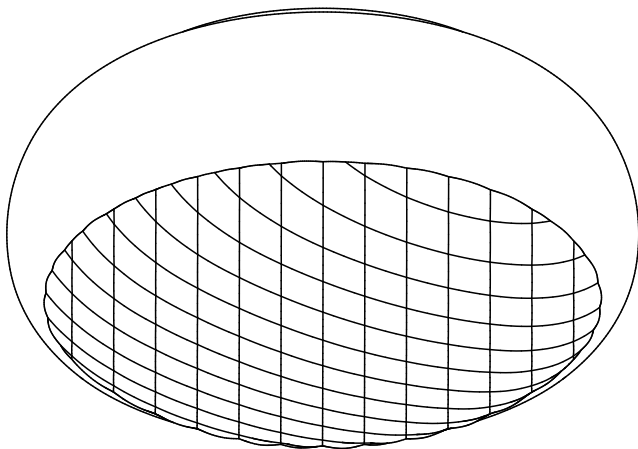

## CAUTION:

Before starting, turn off power at main circuit panel.

## ADVERTENCIA:


Antes de comenzar la instalación, apague la corriente en el tablero principal.

## ATTENTION:

Coupez l'alimentation avant de procéder à l'installation.



Calling for backup? Scan above to contact our team.



[www.RBW.com](http://www.RBW.com)


+1 212 388 0399

[support@RBW.com](mailto:support@RBW.com)

© RBW Studio LLC, 2013, 2020

## Globe Finish


- Glass Clear/Frosted
- Plastic Clear

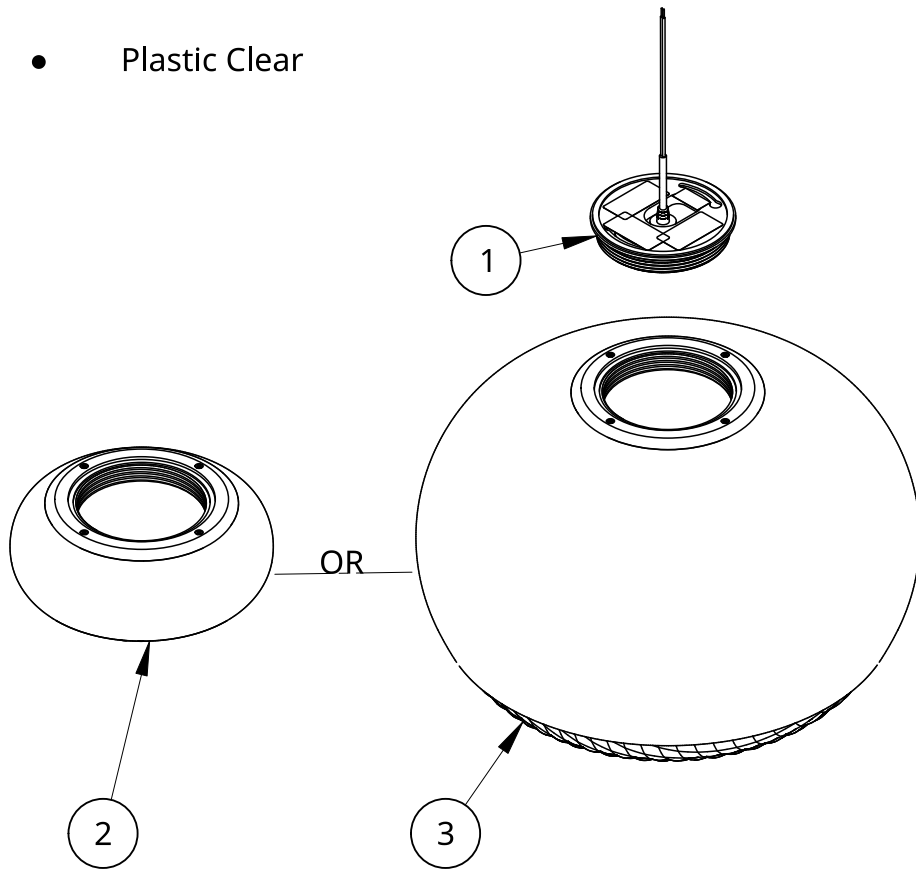

Item	Qty	Part number	Description
1	1	10644-27	Assembly: Print Sconce Module. 200mA. RBW LED 65mm DC. 2700K CCT.
2	1	12563	Assembly: Print Small Globe Clear & Frosted Glass
3	1	12558	Assembly: Print Large Globe Clear & Frosted Glass




Driver dimensions and location may vary, consult your order confirmation for details.

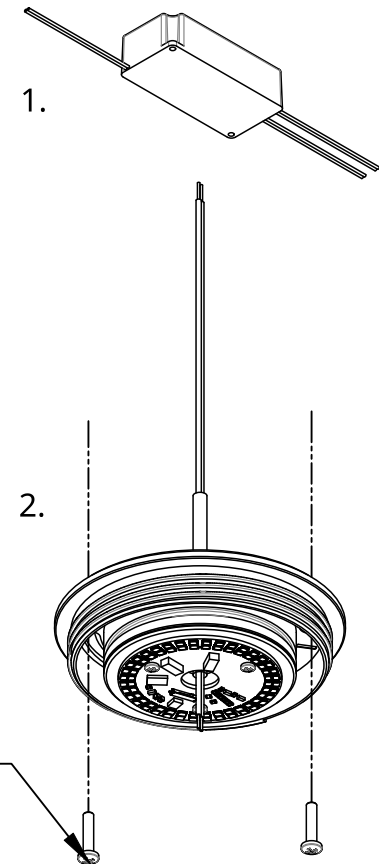

\*Fasteners not included

## Installation - Base Plate Assembly

1. Connect Red(+) and Black(-) Sconce wires to low voltage leads from externally located driver.
2. Fix the Module to desired mounting surface with appropriate fasteners.

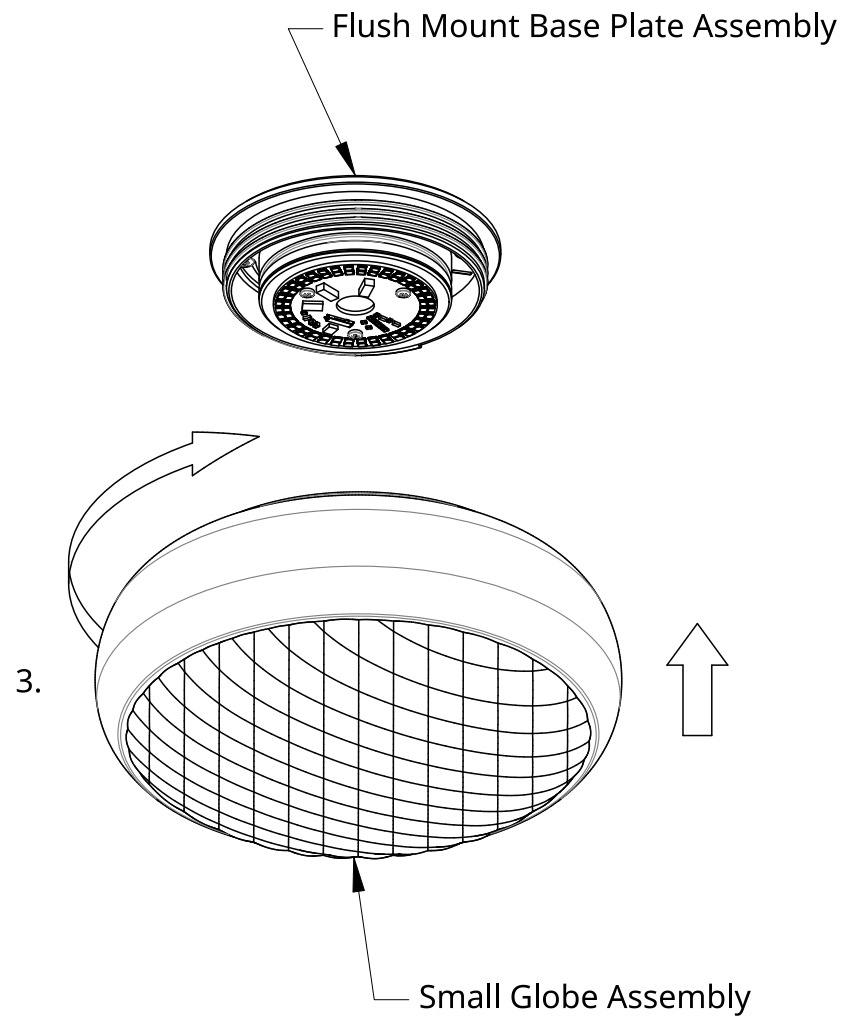

Page intentionally left blank

### Installation - Globe Assembly

3. Thread Globe Assembly clockwise onto Flush Mount Base Plate Assembly.
4. Congratulations! End of guide.