



LUCA 3.5" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

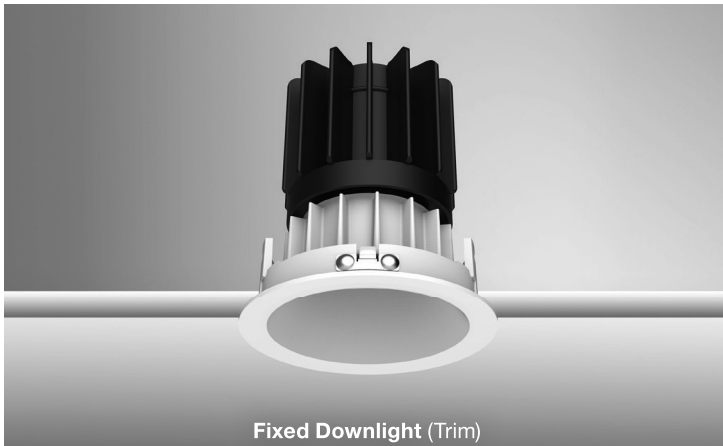

Fixed Downlight (Trim)

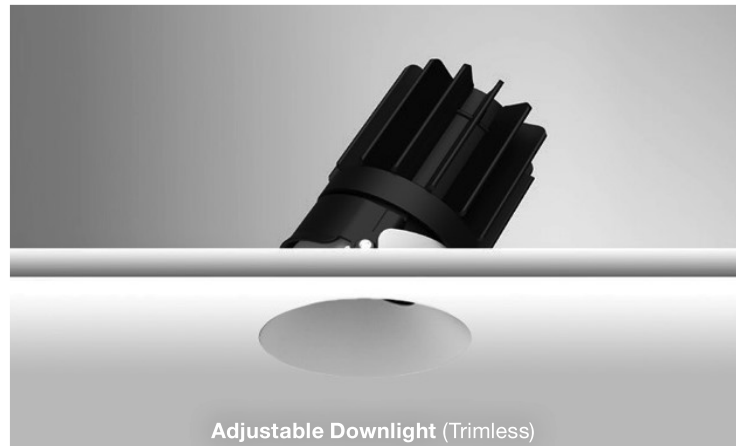

Adjustable Downlight (Trimless)

DESCRIPTION

Introducing Luca "The Bringer of Light" Downlight Series, a testament to the latest advancements in cutting-edge lighting technology, delivering high-performance solutions designed to elevate hospitality, retail, commercial, and discerning residential spaces. Our Luca downlights distinguish themselves with precision optics and exceptional color rendering, surpassing a 90 CRI (Color Rendering Index) in both Static and Warm Dim options.

The Luca Downlight series delivers captivating illumination across a wide spectrum, creating a visually engaging experience within any space.

With its extensive range of design and installation options, our Luca 3.5 Downlight is versatile for a wide array of new construction and remodel applications. Moreover, the compact form factor of the Luca 3.5 allows for installation in spaces with limited clearance.

Discover a new era of lighting performance and versatility with the Luca 3.5 Downlight Series, where superior optics, lumen performance, and outstanding color consistency converge to transform a space. For personalized quotes and expert layout assistance, share your drawings and concepts with our design team at design@PureEdgeLighting.com

SPECIFICATIONS

TRIM OPTIONS	Trim, Trimless, Round, Square, & Fixed, Adjustable				DIMMING	Universal Dimming TRIAC/ELV: 100% – 3% 0-10V: 100% – 0.1% dim to off DALI2: 100% – 0.1% dim to off Pure Smart™ 100% – 5%	
FINISH	Reflector: White, Black, Haze Silver (low-glare), Custom Trims: White, Black, Custom					Pure Smart™ Wi-Fi Dimmer TRIAC/ELV (applies to traditional bulbs and fixtures static CCT/warm dim). Communicates via 2.4GHz Wi-Fi. No Hub needed. Voice control with Google Assistant, Alexa, Siri, Shortcuts, and IFTTT	
ADJUSTABLE	30 Degrees Tilt, 360 Rotation						
BEAM ANGLE	10°, 15°, 25°, 35°, 45°, 55°						
WATTAGE	16W	20W	24W	26W			
LUMENS @ 3000K, 40 Degrees	1343Lm	1610Lm	1802Lm	2113Lm	CUT OUT SIZE	Round: Ø4" Square: 4"	
EFFICACY	84Lm/W	81Lm/W	75Lm/W	81LM/W		ENVIRONMENT	Suitable for damp locations
CCT	2400K, 2700K, 3000K, 3500K & 4000K					CEILING THICKNESS	0.5" - 1"
AVERAGE CRI	90+					ENVIRONMENT	Suitable for damp locations
INPUT VOLTAGE	120V ELV/TRIAC, 120V-277V & 0-10V & DALI					CERTIFICATIONS	ETL Listed. Meets Title 24 (JA8) requirements. Down Light Trim - Wet Listed. Adjustable - Damp listed* *Glass Lens to be used in showers and similar environments
CONSTRUCTION	Housing: Galvanized Steel Trims and Reflectors: Die-Cast Aluminum				AVERAGE LIFE		50,000 Hours
ACCESSORIES	Clear Glass & Soft Diffusing Film (Included) Linear Spread Glass Lens, Wide Diffuse Glass Lens, Double Asymmetric Glass Lens, or Hexcell Louver				WARRANTY*		5 Years *See published warranty terms for detailed information

NOMINAL LAMP DATA

WATTS	LUCA 3.5 STATIC WHITE																			
	16W					20W					24W					26W				
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS	1556	1301	1343	1593	1585	1385	1546	1610	1674	1707	1488	1730	1802	1874	1910	1744	2028	2113	2198	2240
LUMENS PER WATT (lm/w)	97	81	84	100	99	69	77	81	84	85	62	72	75	78	80	67	78	81	85	86
CRI	93	93	93	93	93	92	92	92	92	92	92	92	92	92	92	90	90	90	90	90

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 3.5" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

REV 09.19.25

#1 SELECT - LIGHT ENGINE, TRIM AND REFLECTOR

The standard ordering code serves both as a standalone option for remodeling and can also be utilized to incorporate new construction frames and housings.



System	Beam Spread	Color Temperature @ 90+ CRI	Trim Shape	Trim Function	Reflector Finish	Trim Type Finish
L35	NF	27K	R	D	W	L
L35 Luca 3.5 Light Engine	VS VeryNarrow Spot 10° NS Narrow Spot 15° SP Spot 25° NF Narrow Flood 35° FL Flood 45° WF Wide Flood 55° *NS: 16 Watt Only	24K* 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 35K 3500K Neutral White 40K 4000K Cool White *Only available in NS	R Round S Square	D Downlight A Adjustable P* Pinhole/Adjustable *Only available with black reflector and trimless or white trim	W White H Haze B Black C Custom	W White B Black L Trimless C Custom



#2 SELECT - HOUSINGS

REMODEL DRIVER NON-IC

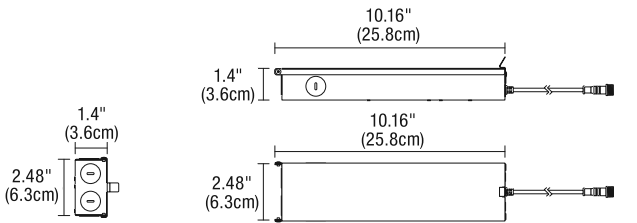
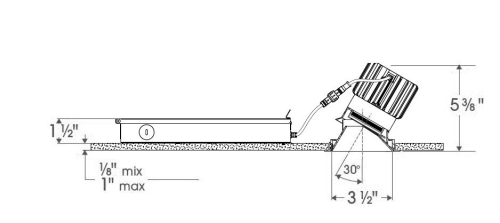


Product	Housing Type	Rating Type	Wattage/Lumens	Dimming
L35	RM	NIC	20W	UN
L35 Luca 3.5 Downlight	RM Remodel	NIC Non-Insulation Contact	16W 16 Watts/1343 Lumens 20W 20 Watts/1610 Lumens 24W 24 Watts/1802 Lumens 26W 26 Watts/2113 Lumens	UN TRIAC/MLV, ELV 120V Input 01 0-10V 120V/277V Input DA DALI 2 120V/277V input

NEW CONSTRUCTION FRAME AND DRIVER NON-IC




Product	Housing Type	Rating Type	Wattage/Lumens	Dimming
L35	NCF	NIC	20W	UN
L35 Luca 3.5 Downlight	NCF New Construction Frame	NIC Non-Insulation Contact	16W 16 Watts/1343 Lumens 20W 20 Watts/1610 Lumens 24W 24 Watts/1802 Lumens 26W 26 Watts/2113 Lumens	UN TRIAC/MLV, ELV 120V Input 01 0-10V 120V/277V Input DA DALI 2 120V/277V input

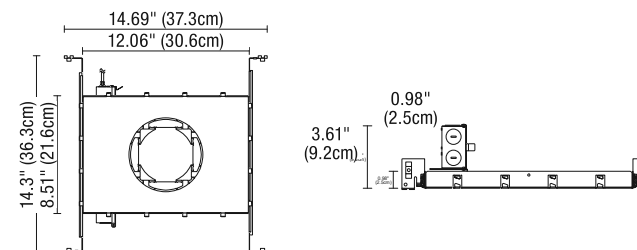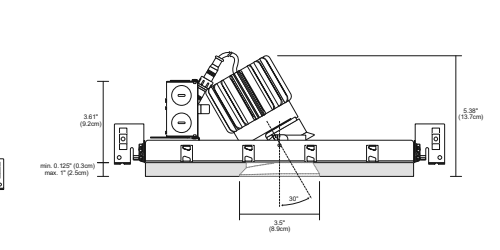NEW CONSTRUCTION HOUSING AND DRIVER IC



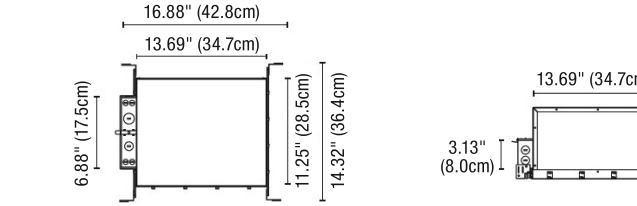


Product	Housing Type	Rating Type	Wattage/Lumens	Dimming
L35	NCH	IC	20W	UN
L35 Luca 3.5 Downlight	NCH New Construction Housing	IC Insulation Contact	16W 16 Watts/1343 Lumens 20W 20 Watts/1610 Lumens 24W 24 Watts/1802 Lumens	UN TRIAC/MLV, ELV 120V Input 01 0-10V 120V/277V Input DA DALI 2 120V/277V input

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--





LUCA 3.5" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS





REV 09.19.25

LUCA 3.5 TRIM OPTIONS

Fixed Downlight

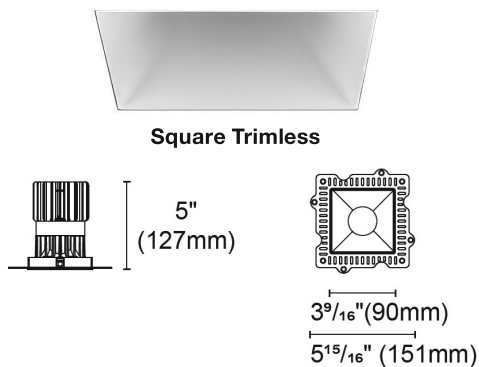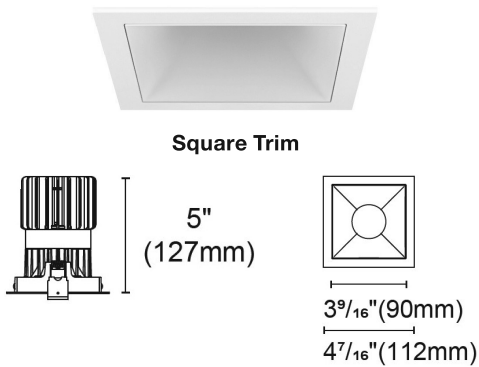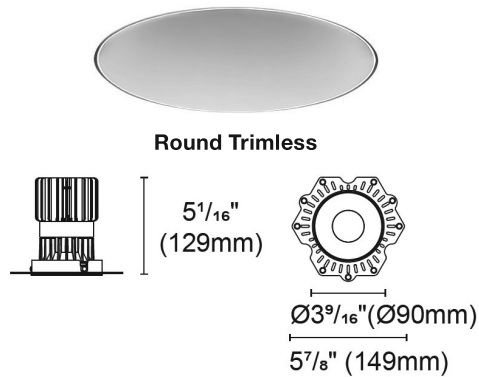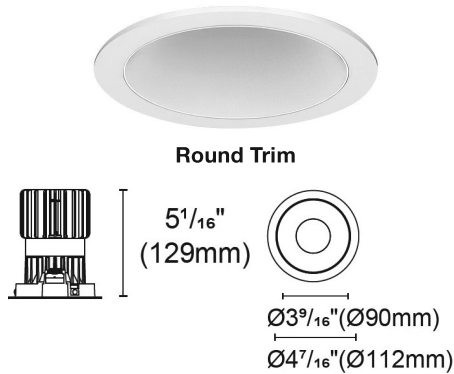

Adjustable Downlight

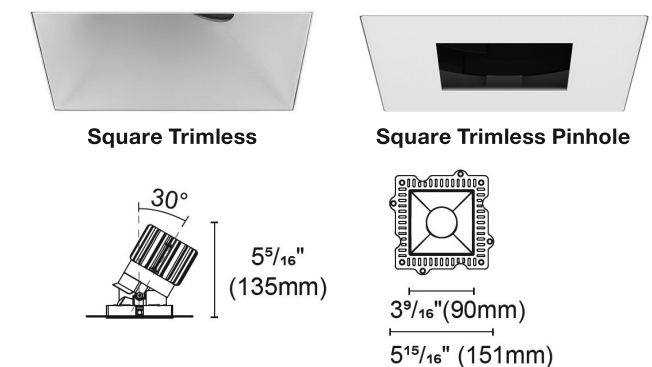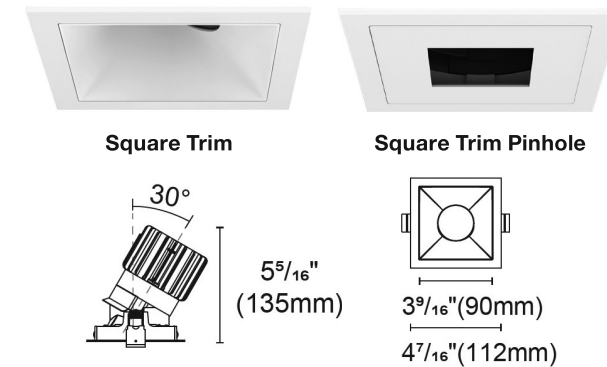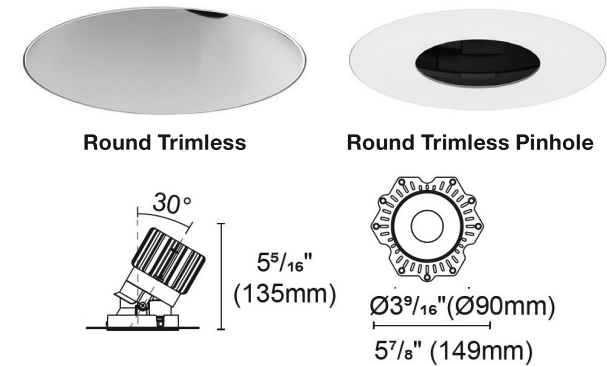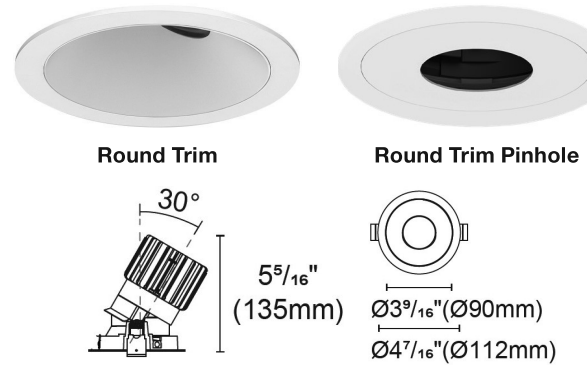

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 3.5" STATIC WHITE 120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 3.5 TRIM & REFLECTOR OPTIONS

ROUND TRIM

DOWNLIGHT / ADJUSTABLE

Black Trim


White Trim



Black Reflector



White Reflector



Haze Reflector




Pinhole Trim

SQUARE TRIM


DOWNLIGHT / ADJUSTABLE

Black Trim

White Trim



Black Reflector



White Reflector



Haze Reflector



Pinhole Trim

LUCA 3.5" STATIC WHITE


120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 3.5 FOOT CANDLE DISTRIBUTION

D - Distance From Luca fixture, **FC** - Initial foot candles at the center of beam, **DIA** - Diameter

16W at 3000K


NARROW SPOT
15°



D'	FC	DIA"
1'	8708	3.4"
2'	2177	6.6"
3'	968	9.8"
4'	544	13"
5'	348	16.2"
6'	242	19.4"
7'	178	22.6"
8'	136	25.8"

DIA.


SPOT
20°



D'	FC	DIA"
1'	2304	5.4"
2'	576	10.8"
3'	256	16.2"
4'	144	21.6"
5'	92	27"
6'	64	32.4"
7'	47	37.8"
8'	36	43.2"

DIA.


NARROW FLOOD
35°



D'	FC	DIA"
1'	2756	6.8"
2'	689	13.2"
3'	306	19.6"
4'	172	26"
5'	110	32.4"
6'	77	38.8"
7'	56	45.2"
8'	43	51.6"

DIA.


FLOOD
45°



D'	FC	DIA"
1'	1550	10.2"
2'	388	19.8"
3'	172	29.4"
4'	97	39"
5'	62	48.6"
6'	43	58.2"
7'	32	67.8"
8'	24	77.4"

DIA.

WIDE FLOOD
55°



D'	FC	DIA"
1'	848	11.8"
2'	212	23.7"
3'	94	35.6"
4'	53	47.5"
5'	34	59.4"
6'	24	71.3"
7'	17	83.2"
8'	13	95.1"

DIA.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 3.5" STATIC WHITE



120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 3.5 FOOT CANDLE DISTRIBUTION (CONTINUED)



D - Distance From Luca fixture, **FC** - Initial foot candles at the center of beam, **DIA** - Diameter

20W at 3000K



SPOT
20°





NARROW FLOOD
35°

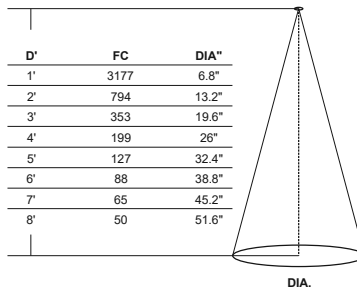

FLOOD
45°

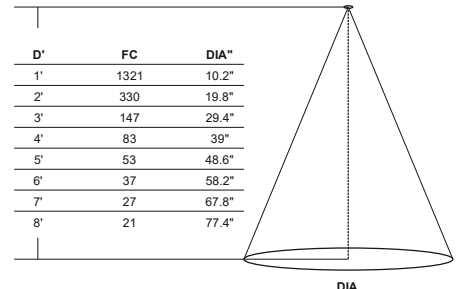

WIDE FLOOD
55°

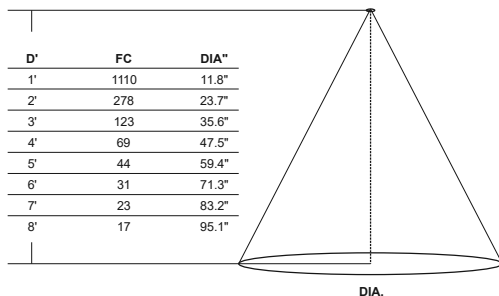

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 3.5" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS



REV 09.19.25

LUCA 3.5 FOOT CANDLE DISTRIBUTION (CONTINUED)



D - Distance From Luca fixture, **FC** - Initial foot candles at the center of beam, **DIA** - Diameter

24W at 3000K



SPOT
20°

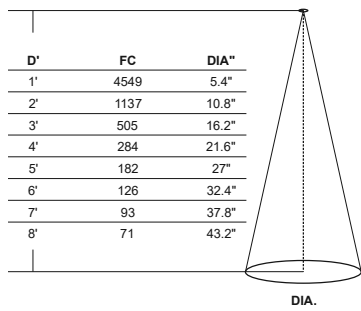



NARROW FLOOD
35°

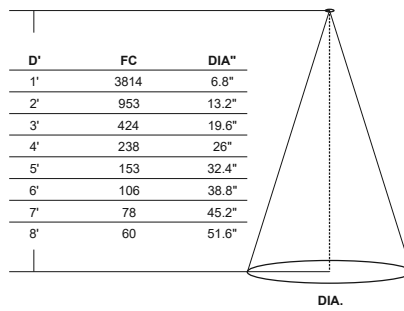

FLOOD
45°

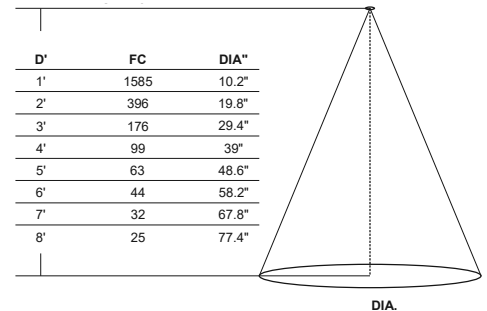

WIDE FLOOD
55°

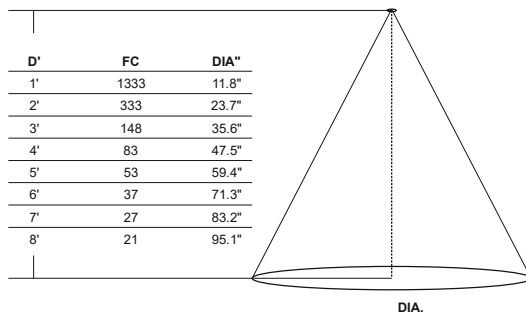

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 3.5" STATIC WHITE



120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

LUCA 3.5 FOOT CANDLE DISTRIBUTION (CONTINUED)



D - Distance From Luca fixture, FC - Initial foot candles at the center of beam, DIA - Diameter

26W at 3000K



SPOT
20°

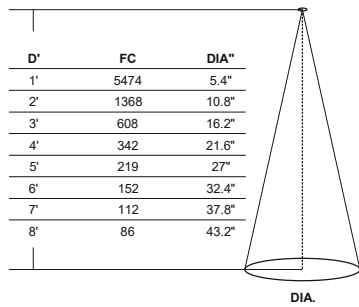



NARROW FLOOD
35°

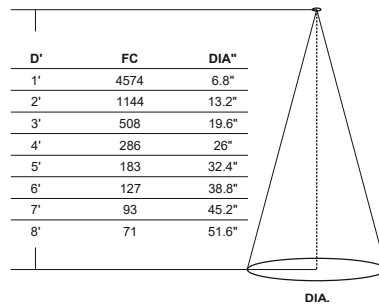

FLOOD
45°

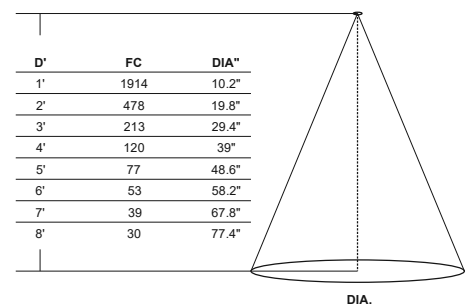

WIDE FLOOD
55°

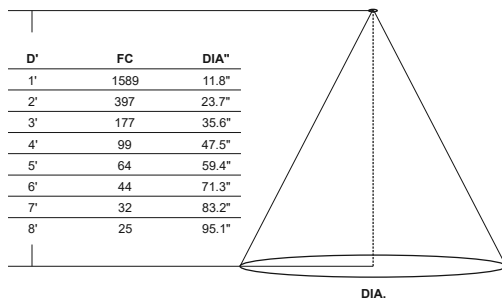

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



LUCA 3.5" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

BEAM SPREAD & LENSES


LOW GLARE BAFFLE

Designed with a 30 degree cut-off angle, the Luca provides high output and efficiency while maximizing visual comfort.

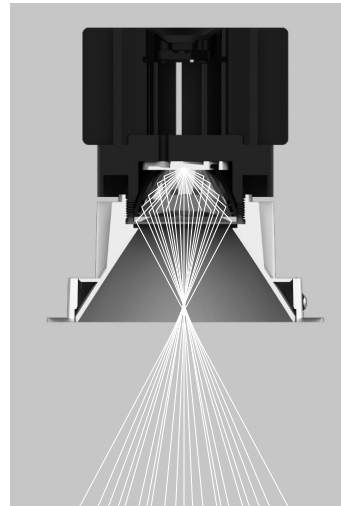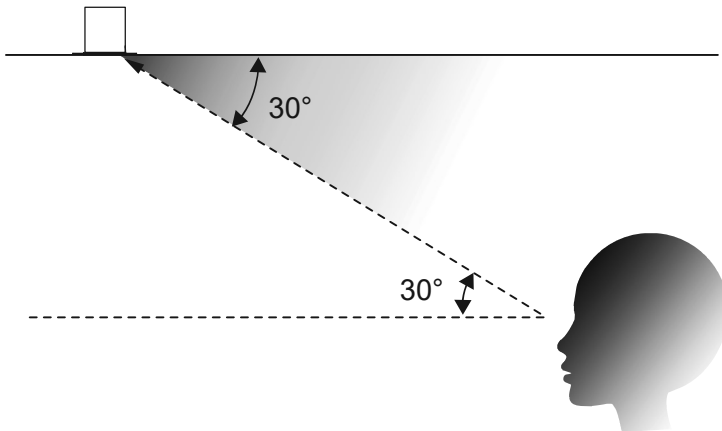

OPTICS

Our Luca Downlight has been meticulously designed to deliver exceptional performance and visual comfort. With its deep baffle design and a 30° cut-off, it effectively minimizes glare while providing a consistent and high-quality distribution of white light. Our Adjustable Downlight features a 30° 30° tilt for precise aiming and control.

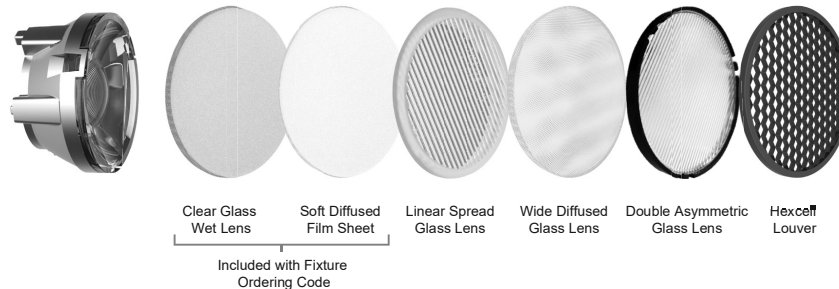

In addition to the included glass wet Lens and soft diffusion film we offer a variety of beam spreads, and lens accessories to tailor the output and beam shape for specific applications. The Linear spread lens glass produces an elliptical illumination pattern, while the Wide diffused glass lens evenly distribute the light. The Double Asymmetric Glass Lens splits the light beam evenly into two opposing directions, creating two elliptical illumination patterns. Additionally, the Hexcell Louver is available for enhanced glare control.

REPLACEMENT OPTICS

Product	Type	Beam Spread*	Color Temperature
LEN	L35	NF	SW
LEN Lens	L35 Luca 3.5	NF Narrow Flood 35° FL Flood 45° WF Wide Flood 55°	SW Static White

*Restrictions: NS & SP not available for replacement optics

ACCESSORIES


Product	Type
GL16	L
GL16 Glass 2" (50mm) Diameter	C Clear Glass L Linear Spread Glass Lens W Wide Diffuse Glass Lens DAL Double Asymmetric Glass Lens
LF16 Film 2" (50mm) Diameter	S Soft Diffusion Film
LO16 2" (50mm) Diameter	H Hexcell Louver
STB-16 Snoot	BK Black

LUCA 3.5" STATIC WHITE


120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

WIRING DIAGRAMS

TRIAC / FORWARD PHASE / LEADING EDGE DIMMING (TRI)
 Input 120VAC 50/60Hz
 Range 100% - 3%

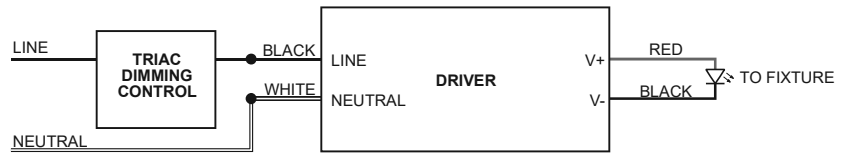


ELV / REVERSE PHASE / TRAILING EDGE DIMMING (TRI)
 Input 120VAC 50/60Hz
 Range 100% - 3%

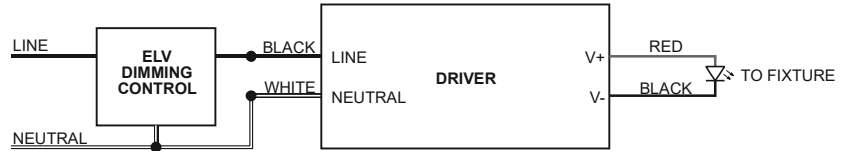


0-10V DIMMING (010)
 Input 120VAC-277VAC 50/60Hz
 Range 100% - 0.1% Dim to Off

NOTE
 Cap off unused wires individually.
 DO NOT cap together.

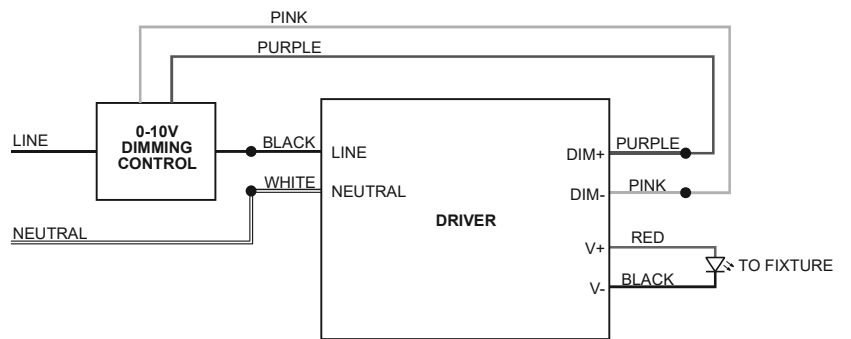

DALI DIMMING (DAL)
 Input 120VAC-277VAC 50/60Hz
 Range 100% - 0.1% Dim to Off

NOTE
 Cap off unused wires individually.
 DO NOT cap together.

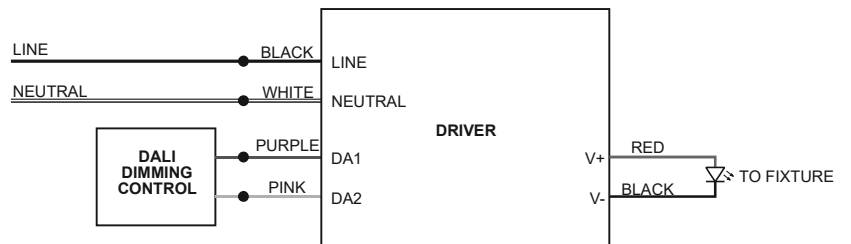

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

LUCA 3.5" STATIC WHITE & WARM DIM UNIVERSAL SMART DIMMER

120V-277V, RECESSED FIXED & ADJUSTABLE

LUCA 3.5 DIMMING & CONTROLS FOR TRIAC/ELV ONLY



DESCRIPTION

The Pure Smart™ Wi-Fi dimmer works with non-smart bulbs and fixtures compatible with forward phase or Triac dimming (not compatible with 0-10V Dimming). Smart Wi-Fi Dimmer also allows for scheduling, grouping, voice control and control from anywhere via the WiZ app on your mobile device or the WiZ Pro Dashboard on your desktop.

OPERATION*

Features an ON/OFF switch and dimming functionality activated with a long press of the On (Brightness Up) or Off (Brightness Down) button. 400W Maximum Incandescent load, 150W CFL and/or retrofit LED bulb. Minimum trim and fade in/out settings are adjusted in the WiZ App. Communicates over 2.4 GHz Wi-Fi only. If remote power is being used, this dimmer is only compatible with PureEdge Universal Power Supplies. No Hub Required.

*When dimming traditional CFL/LEDs, ensure they are marked as dimmable.

BODY

Durable polycarbonate body. Compatible with decorator style wall plate (Not Included)

EASY INSTALLATION

The Pure Smart™ Wi-Fi Dimmer installs just like a regular in-wall switch. Works with any non-smart Static CCT or Warm Dim bulb/fixture compatible with forward phase or Triac dimming. Can be used in 3-way applications (Reference Manual for Wiring Diagram). Compatible with standard gangable boxes. Requires neutral wire. No Hub Required.

WiZ APP


The Pure Smart™ Dimmer can be controlled via the WiZ app (works with iOS and Android) from anywhere. Voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, and scheduling can all be programmed with the WiZ app or WiZ Pro Dashboard.

SECURITY

3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

Product	Type	Finish
SWW	DIM	WH
SWW Pure Smart Wall WIZ Pro Connected	DIM Dimmer	WH White

NETWORK TOPOLOGY

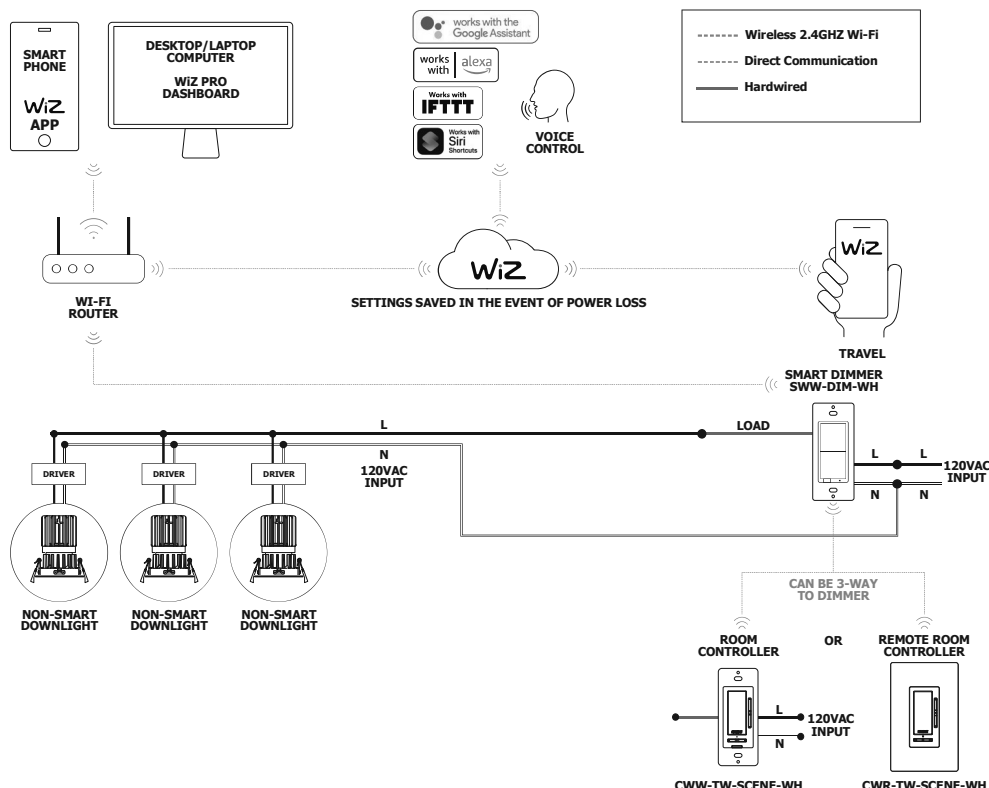

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


LUCA 3.5" STATIC WHITE

120V-277V, RECESSED FIXED & ADJUSTABLE DOWNLIGHTS

TM-30-15 DATA

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%