

DESCRIPTION

TruTrack® Trim is a 2-circuit, recessed track system that recesses within any flat surface including 5/8" drywall, tile, and millwork, featuring magnetic track head connectors. The patented design is precision engineered to blend seamlessly within the space, eliminating the need for joist modification, and provides more flexibility to make turns along the ceiling. The 1/2" trim flange and slot cover are paintable, allowing TruTrack® Trim to become one with the architecture. Remote Power Supplies are required and sold separately. Includes a 5-year pro-rated warranty. For custom designs and quotes, email your drawings to design@PureEdgeLighting.com.

FEATURES

- Two-circuit system, with two power supplies, allows for independent switching and dimming
- Magnetic Track Heads allow you to easily adjust the fixture direction, tilt and rotation with one hand - for greater installation flexibility while atop a ladder
- Designed for use with 24VDC Remote Power Supplies up to 40' away
- Magnetic Track Heads are available in five color temperatures including Warm Dim (**30D**) that dims from 3000K down to 1900K
- Track Head Lumen Output up to 1256 Lumens with multiple fixed and adjustable beam spread options
- Designer-grade Color Rendering 95CRI
- Power Feeds may be ordered in End, Center, L, T and X, up to two 200 watt power supplies (180 watts WiZ Pro) before re-feeding, 800 watts (4 x up to 200W) with center feed
- Recessed TruTrack® Trim Channel is available in 2', 4', 6' and 8' lengths, with the ability to be cut in the field
- Opaque Plastic Slot Cover is included with TruTrack® Trim Channel to hide Recessed Track Slot and may be painted to match the ceiling
- 10 Gauge busbar to helps eliminate voltage drop

FINISH & MATERIAL

- Paintable, White (RAL 9010) or Black Powder Coat
- Extruded Aluminum Channel, conductors are a pair of #10 Gauge Copper busbar

TRACK HEAD INTEGRAL LED

- Static White Color Temperatures: 24K, 27K, 30K, 35K
- Warm Dim: 30D (3000K-1900K)
- Rated for 50,000 hours at L70 (70% lumen maintenance)

POWER SUPPLY AND DIMMING (SOLD SEPARATELY)

24VDC, Class 2 wiring

- Uni Trim Power Supply Universal Dimming (**TRIAC, ELV, 0-10V**)
ELV & TRIAC Smart Dimmer & Switch

APPLICATIONS

Designed for any indoor flat surface including but not limited to tile, drywall and millwork. Ideal applications in Residential, Commercial, Retail, and Hospitality environments.

WARRANTY / LABELS


5 year pro-rated warranty. Assembled in America
ETL (Conforms to UL 1598 and CSA 22.2 #250.0), Class 2 Under 100 Watts, 200 Watt UL2108

An original, ground-breaking design from PureEdge Lighting – backed by over 30 years of precision manufacturing.

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------



EASY KIT Straight with power, order fixture and power supplies separately

Kit includes end feed, track, track cover and end cap. Order fixture heads and power separately.

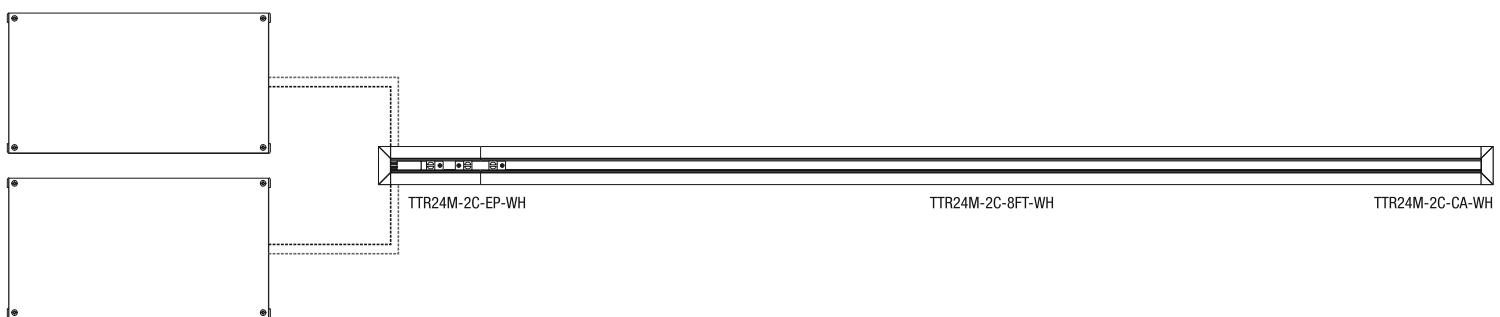
 24VDC REMOTE POWER SUPPLIES
ORDER SEPARATELY
UP TO TWO 200 WATTS EACH
(WIZ PRO 180 WATTS EACH)

System	Circuit	Power Feed	Length in Feet	Finish
TTR24M	2C	EP	30FT	WH

TTR24M TruTrack® Trim Recessed 24VDC Magnetic **2C** Two Circuit **EP** End Power Feed
4-30FT 4-30'
 Order in 2' increments **BK** Black
WH White RAL 9010

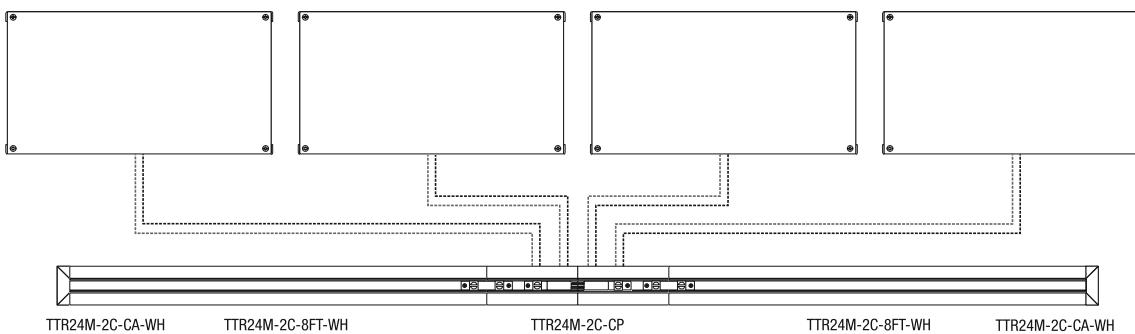 24VDC REMOTE POWER SUPPLIES
ORDER SEPARATELY
UP TO TWO 200 WATTS EACH
(WIZ PRO 180 WATTS EACH)


System	Circuit	Power Feed	Length in Feet	Finish
TTR24M	2C	CP	60FT	WH

TTR24M TruTrack® Trim Recessed 24VDC Magnetic **2C** Two Circuit **CP** Center Power Feed
4-60FT 4-60'
 Order in 2' increments **BK** Black
WH White RAL 9010

PROJECT	FIXTURE TYPE	DATE

TRUTRACK® MAGNETIC DIY

24VDC REMOTE POWER, RECESSED TWO-CIRCUIT TRACK SYSTEM, 1/2" TRIM

PURE  LIGHTING

WIZ PRO


REV 05.08.25

COMPONENTS





TWO CIRCUIT RECESSED 24VDC TRUTRACK® TRIM

2', 4', 6', 8'
(61cm, 121.9cm, 182.9cm, 243.8cm)

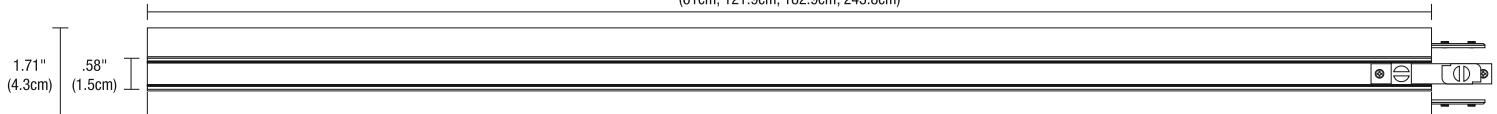

COMPONENTS

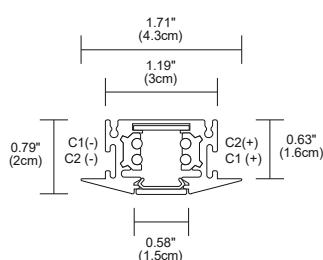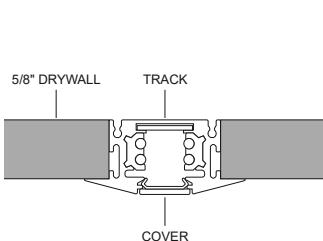

TWO CIRCUIT TRACK WITH TRIM

Recessed two-circuit track with 1/2" paintable trim, made of extruded aluminum with 10 gauge buss bar to help eliminate voltage drop. Includes two paintable opaque slot covers for concealing conductive connectors. Designed for use with 24VDC Remote Power Supply, sold separately.


System	Circuit	Length in Feet	Color
TTR24M	2C	8FT	BK
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	2FT 2' 4FT 4' 6FT 6' 8FT 8'	BK Black WH White RAL 9010



OPAQUE SLOT COVER (INCLUDED)

Two paintable 1/2" Opaque Slot Covers are included with each Recessed Track.


System	Type	Length in Feet	Color
T24	SCO	8FT	BK
T24 Track 24VDC	SCO Opaque Cover for Track Slot	8FT 8'	BK Black WH White RAL 9010

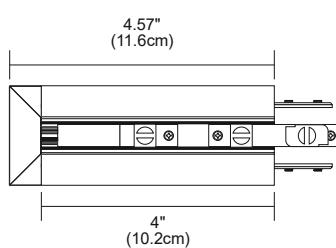

END POWER FEED WITH JUNCTION BOX

6" starter section included. Feed 24VDC Track with two up to 200 watt (Wiz Pro 180 watts) power supply feeds. May be used on cement ceiling with only 5/8" dry wall (Jbox not used) comes with T24M-2C-P power feed connector. Can be used with 5/8"- 1-1/4" drywall.

System	Circuit	Type	Color
TTR24M	2C	EP	WH
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	EP End Power Feed up to 200 Watts, 24VDC, 6" Long track	BK Black WH White RAL 9010

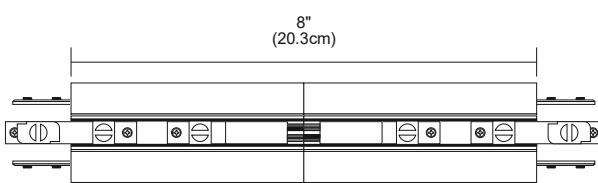

CENTER POWER FEED WITH JUNCTION BOX

12" starter section included, feed track with up to four 200 watt (Wiz Pro 180 watts) power supply feeds. 24VDC comes with two T24M-2C-P power feed connectors. Can be used with 5/8"- 1-1/4" drywall.

System	Circuit	Type	Color
TTR24M	2C	CP	WH
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	CP Center Dual Power Feed up to 2x200 Watts with 12" Long track	BK Black WH White RAL 9010

PROJECT	FIXTURE TYPE	DATE

TRUTRACK® MAGNETIC DIY

24VDC REMOTE POWER, RECESSED TWO-CIRCUIT TRACK SYSTEM, 1/2" TRIM


PURE  LIGHTING

WIZ PRO

REV 05.08.25

Indicates 24VDC Power Flow


COMPONENTS

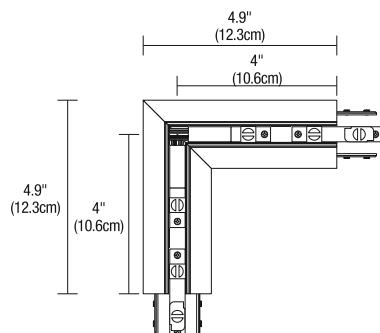

L-SHAPED POWER FEED CONNECTOR

12" TruTrack® Trim starter section included, feed track with up to four 200 watt (Wiz Pro 180 watts) power supply feeds. 24VDC comes with two T24M-2C-P power connectors. Can be used with 5/8" drywall.


System	Circuit	Type	Color
TTR24M	2C	LPD	WH
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	LPD L-Shaped Dual Power Connector up to 4x200 Watts, 6" long Track	BK Black WH White RAL 9010

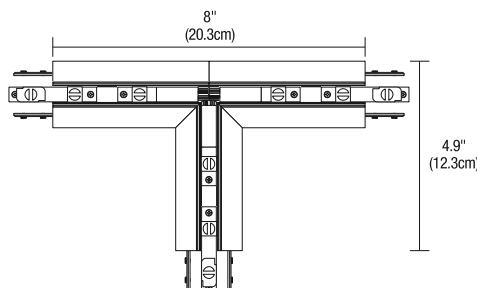

T-SHAPED POWER FEED WITH JUNCTION BOX

T-Shaped Power feed for TruTrack® Trim, feeds six up to 200 watts (Wiz Pro 180 watts) 24VDC, 3 directions, mounting to a 4" Square Junction Box comes with three T24M-2C-P power feed connectors. Can be used with 5/8"- 1-1/4" drywall.


System	Circuit	Type	Color
TTR24M	2C	TP	BK
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	TP T-Shaped Power Feed Triple Feed up to 6x200 Watts, 24VDC with 6" Long Track	BK Black WH White RAL 9010

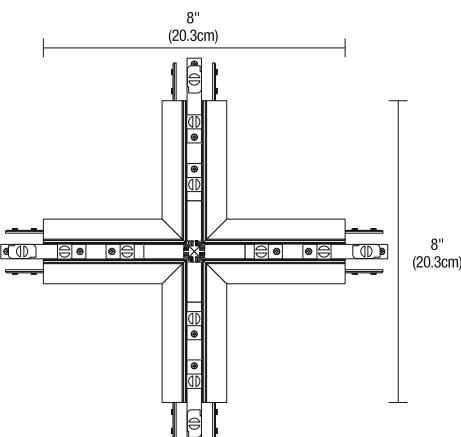

X-SHAPED POWER FEED WITH JUNCTION BOX

X-Shaped Power feed for TruTrack® Trim, feeds eight up to 200 watts (Wiz Pro 180 watts) 24VDC, 4 directions, mounting to a 4" Square Junction Box comes with four T24M-2C-P power feed connectors. Can be used with 5/8"- 1-1/4" drywall.

System	Circuit	Type	Color
TTR24M	2C	XP	BK
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	XP X-Shaped Power Feed Quad Feed up to 8x200 Watts, 24VDC, with 6" Long Track	BK Black WH White RAL 9010

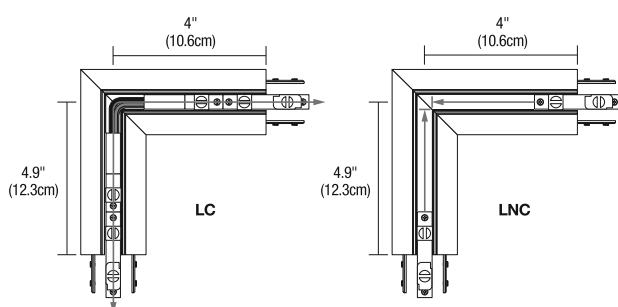

L-CONNECTOR

Conductive or Non-Conductive L-Connector joins two straight TruTrack® Trim Channels together to make a 90° angle. Order Non-Conductive when adding two Power Supplies in a square configuration.

System	Circuit	Type	Color
TTR24M	2C	LC	WH
TTR24M TruTrack® Trim Recessed 24VDC Magnetic	2C Two Circuit	LC L-Connector Conductive LNC L-Connector Non-Conductive	BK Black WH White RAL 9010

PROJECT	FIXTURE TYPE	DATE


TRUTRACK® MAGNETIC DIY

24VDC REMOTE POWER, RECESSED TWO-CIRCUIT TRACK SYSTEM, 1/2" TRIM


PURE  LIGHTING

WIZ  PRO

REV 05.08.25

Indicates 24VDC Power Flow 

COMPONENTS

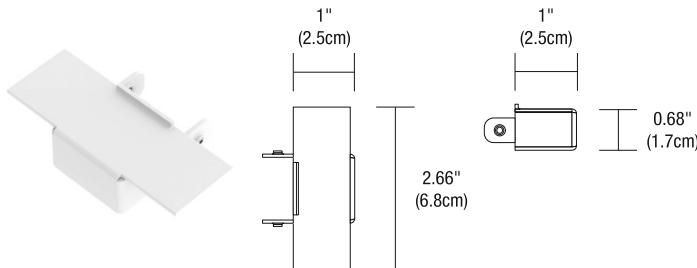


END CAP

Required for each dead end of TTR24M Track System.

System	Circuit	Type	Color
TTR24M	2C	CA	WH

TTR24M TruTrack® Trim Recessed 24VDC Magnetic
2C Two Circuit
CA End Cap
BK Black
WH White

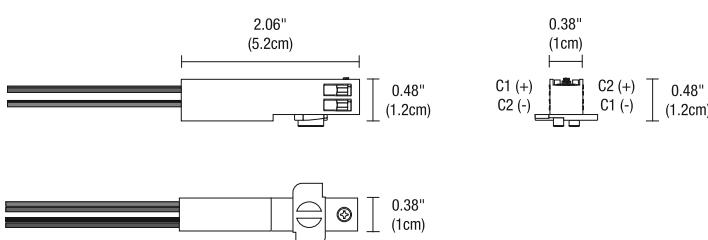


END POWER FEED

Included with each end of Track System.

System	Circuit	Type
T24M	2C	P

T24M Track 24VDC Magnetic
2C Two Circuit
P Power Feed and Track Connector

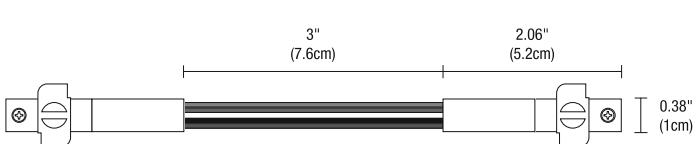


POWER JUMPER

Included with each conductive connector for connecting two sections of track.

System	Circuit	Connector
T24M	2C	JC

T24M Track 24VDC Magnetic
2C Two Circuit
JC Jumper Connector

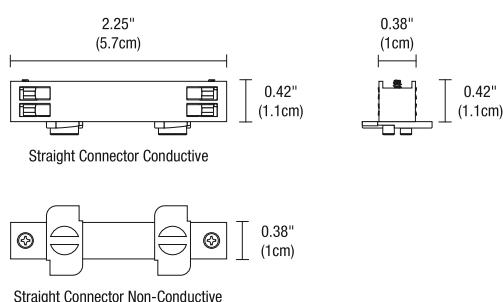


STRAIGHT CONNECTOR

Miniature Straight Connector joins two Track sections end to end and is covered by the Plastic Insert. Included with each Track Sections.

System	Circuit	Type
T24M	2C	SC

T24M Track 24VDC Magnetic
2C Two Circuit
SC Straight Connector Conductive
SNC Straight Connector Non-Conductive Black

INCLUDED WITH TRACK HEADS

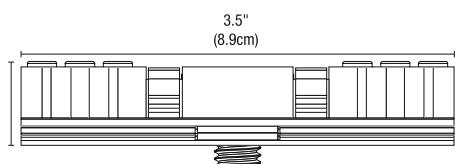

System	Circuit	Connector	Finish
T24M	2C	FJR	BK

T24M TruTrack Magnetic Recessed 24VDC
2C Two Circuit
FJR Fast Jack Connector
BK Black
WH White RAL 9010

PROJECT	FIXTURE TYPE	DATE

TRUTRACK® MAGNETIC DIY

24VDC REMOTE POWER, RECESSED TWO-CIRCUIT TRACK SYSTEM, 1/2" TRIM



PURE  LIGHTING

WIZ  PRO

REV 05.08.25

Indicates 24VDC Power Flow

EXTRA PARTS

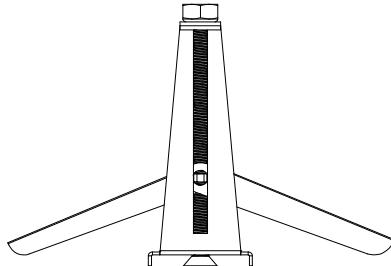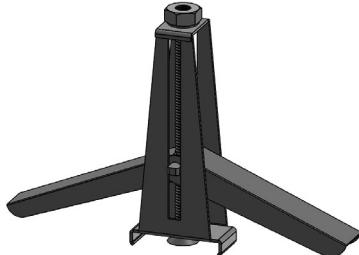

TOGGLE BOLT BRACKET (INCLUDED WITH MAIN ORDERING CODE)
One bracket included for every 32 inches.

System	Type
TTR24M	BRAC

TTR24M TruTrack Trim Magnetic BRAC Bracket


PROJECT		Fixture Type		DATE
---------	--	--------------	--	------

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

PureEdge T24M Track Heads are Compatible with Surface/Suspended Magnetic track (TS24M-2C) and TruTrack® Trim (TTR24M). All uniform beam spread options are field changeable. See accessories page for more information.

Pure Smart™ TruColor™ RGBTW

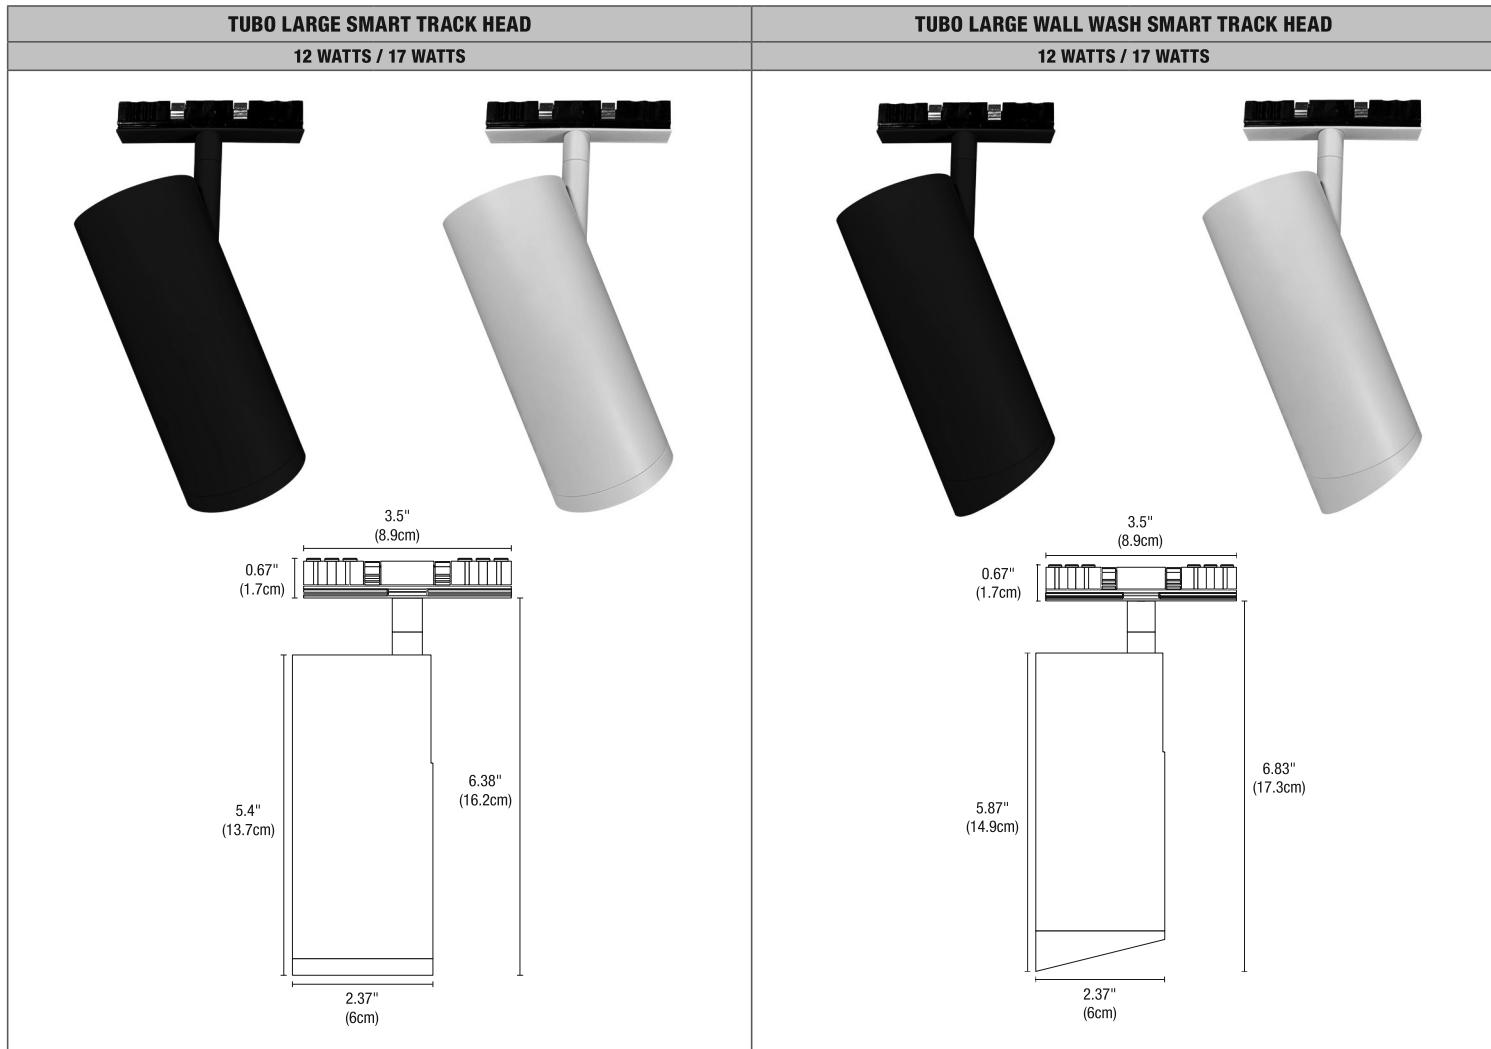

System	Type	Fixture	Wattage	Beam Spread	Lens	Control	Color Temperature	Finish
T24M	2C	TU2L	12W - 17W	NF		WZ	TC	BK

T24M Track Head
24V Magnetic
Connector

2C 2 Circuit

TU2L

Tubo Large 2

12W 12 Watts
17W 17 Watts*

Spot 16°

Narrow Flood 30°

Flood 35°

Wide Flood 45°

Wall Wash

Wiz Smart Control

TruColor™ RGBTW Red, Green, Blue & Tunable

White 1500K- 6500K

Black Powder Coat
Warm White Powder Coat RAL 9010

*Not available
for WH Finish

*Has Aura Effect
without diffusion film


WATTS	12W									17W								
	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
COLOR TEMPERATURE	445	462	507	596	670	737	751	596	494	830	862	962	1130	1271	1401	1531	1307	1082
LUMENS	44	44	47	52	56	61	64	60	56	64	62	65	72	79	87	96	93	82
LUMENS PER WATT (lm/w)	86.7	88.3	89.7	93.2	95.2	96.8	96.7	93.9	91.6	86.4	88.4	91.8	94.7	95.9	97.3	96.5	94.8	93.3
CRI	-0.0027	-0.0011	-0.0019	-0.0022	-0.0023	-0.0005	-0.0005	-0.0041	-0.0036	0.0026	0.0026	0.0026	0.0033	0.0037	0.0024	0.0008	0.0024	0.0006
Duv	87	88	90	93	94	94	93	93	91	88	89	92	94	95	95	94	93	92
Rf	104	101	103	103	103	101	100	105	106	105	105	105	104	104	103	100	105	105
Rg	91	92	90	94	97	98	94	80	66	84	86	92	97	97	98	85	90	83
R9	83	85	87	91	93	96	96	93	92	82	85	89	93	94	96	99	96	96
R13	92	93	93	95	96	97	95	91	88	90	91	93	96	96	97	96	94	93
R15	10	11	11	12	12	12	12	10	9	13	14	15	16	16	16	14	13	

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC


24VDC WITH INTEGRATED LED

PureEdge T24M Track Heads are Compatible with Surface/Suspended Magnetic track (TS24M-2C) and TruTrack® Trim (TTR24M). All uniform beam spread options are field changeable. See accessories page for more information.

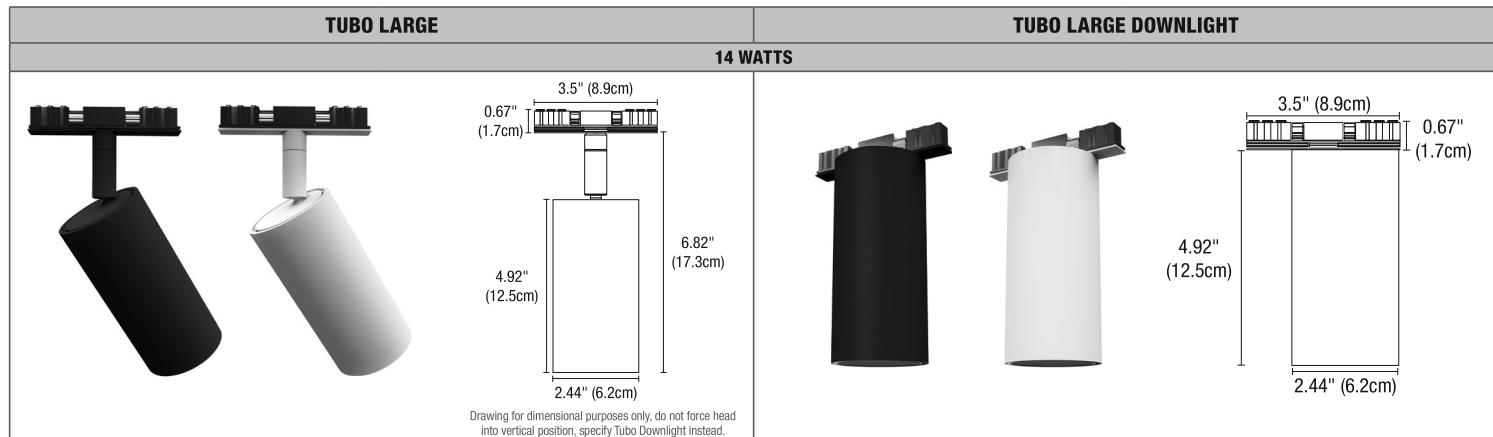

System	Type	Fixture	Beam Spread	Color Temperature	Finish
T24M	2C	TUBL	FL	30K	WH
T24M Track Head 24V Magnetic Connector	2C 2 Circuit	TUBL Tubo Large TUBLD Tubo Large Downlight	NS* Narrow Spot 10° SP Spot 20° NF Narrow Flood 35° FL Flood 45° WF Wide Flood 60°	24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D 3000D Warm Dim 35K 3500K Neutral White	BK Black Powder Coat WH Warm White Powder Coat RAL 9010
			For 7° use STB16 snoot with NS	30D NS: 7.5W 400 lumens	

	BEAM ANGLE REFERENCE 45°				
COLOR TEMPERATURE	24K	27K	30K	30D	35K
TOTAL LUMENS	1238	1035	1069	683	1268
WATTS	14	14	14	14	14
LUMENS PER WATT (lm/w)	88	74	76	49	91
TM-30 DATA	R9: 60 Rf: 93 Rg: 98	R9: 97 Rf: 92 Rg: 100	R9: 64 Rf: 91 Rg: 98	R9: 90 Rf: 95 Rg: 102	R9: 92 Rf: 94 Rg: 101

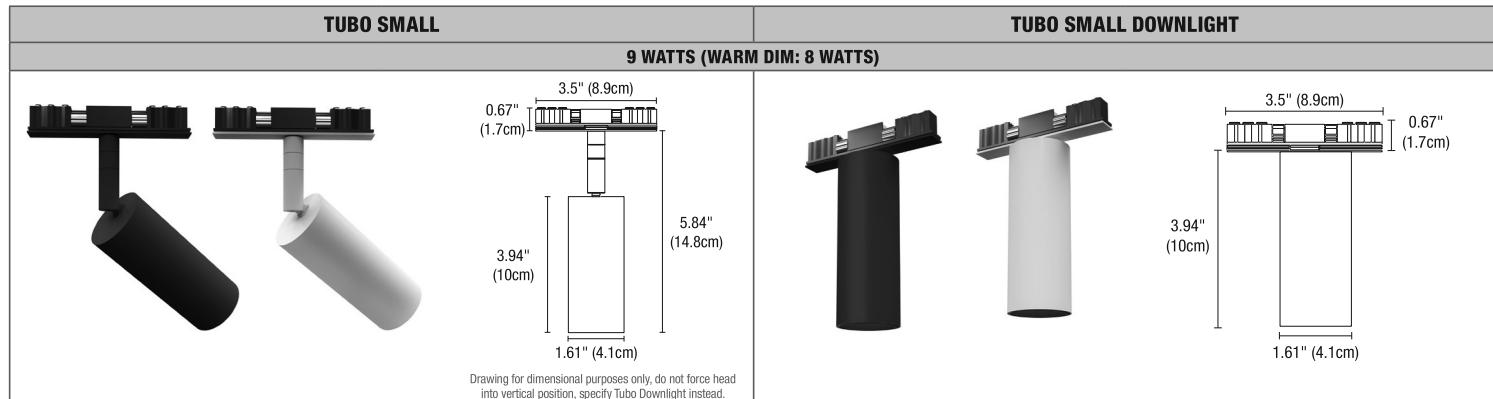

System	Type	Fixture	Beam Spread	Color Temperature	Finish
T24M	2C	TUBS	FL	30K	WH
T24M Track Head 24V Magnetic Connector	2C 2 Circuit	TUBS Tubo Small TUBSD Tubo Small Downlight	NS Narrow Spot 15° SP Spot 25° NF Narrow Flood 35° FL Flood 45° WF Wide Flood 60°	24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D 3000D Warm Dim 35K 3500K Neutral White	BK Black Powder Coat WH Warm White Powder Coat RAL 9010
			*NS with 30D Warm Dim uses snoot, see accessory pages for details		

	BEAM ANGLE REFERENCE 45°				
COLOR TEMPERATURE	24K	27K	30K	30D	35K
TOTAL LUMENS	503	420	434	287	515
WATTS	9	9	9	8	9
LUMENS PER WATT (lm/w)	59	49	51	39	61
CRI	97	92	93	94	98
TM-30 DATA	R9: 60 Rf: 93 Rg: 98	R9: 97 Rf: 92 Rg: 100	R9: 64 Rf: 91 Rg: 98	R9: 90 Rf: 95 Rg: 102	R9: 92 Rf: 94 Rg: 101


PROJECT	FIXTURE TYPE	DATE

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

TUBO LARGE WALL WASH

15 WATTS

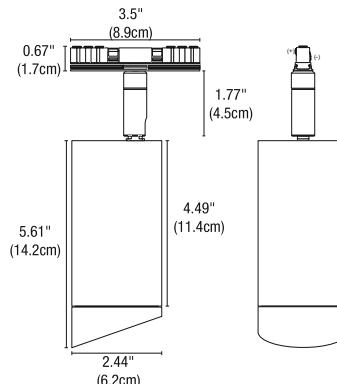

System

T24M

Type

2C

Fixture

TUBL

Beam Spread

WW

Color Temperature

30K

Finish

BK

T24M Track Head 24V Magnetic Connector

2C 2 Circuit

TUBL Tubo Large

WW Wall Wash

24K 2400K Very Warm White

27K 2700K Incandescent White

30K 3000K Warm White

30D 3000K Warm Dim to 1800K

35K 3500K Neutral White


BK Black Powder Coat

WH Warm White Powder Coat RAL 9010

TUBO WALL WASH	
COLOR TEMPERATURE	30K
TOTAL LUMENS	884
WATTS	15
LUMENS PER WATT (lm/w)	59
CRI	92
TM-30 DATA	R9: 61.2 Rf: 92 Rg: 100

ZOOM

16 WATTS

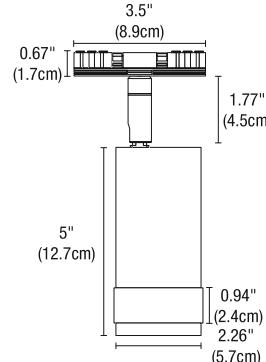

System

T24M

Type

2C

Fixture

ZOOM

Beam Spread

Z2

Color Temperature

30K

Finish

BK

T24M Track Head 24V Magnetic Connector

2C 2 Circuit

ZOOM Zoom

Z1 Zoom Adjust 15° to 55°

Z2 Zoom Adjust 20° to 50°

24K 2400K Very Warm White

27K 2700K Incandescent White

30K 3000K Warm White

30D 3000K Warm Dim to 1800K*

35K 3500K Neutral White

*Only available for Z2

BK Black Powder Coat

WH Warm White Powder Coat RAL 9010

Z1		Z2		Z2	
BEAM ANGLE	15°	55°	20°	50°	20°
COLOR TEMPERATURE	30K	30K	30K	30K	30D
TOTAL LUMENS	686	873	795	1188	727
WATTS	16	16	16	16	15
LUMENS PER WATT (lm/w)	46	61	69	89	50
CRI	93	93	94	94	97
TM-30 DATA	R9: 66 Rf: 92 Rg: 101	R9: 66 Rf: 92 Rg: 101	R9: 74 Rf: 92 Rg: 102	R9: 74 Rf: 92 Rg: 102	R9: 66 Rf: 94 Rg: 101
					R9: 66 Rf: 94 Rg: 101

PROJECT

Fixture Type

DATE


T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

All uniform beam spread options are field changeable.

RADIANT LARGE

14 WATTS

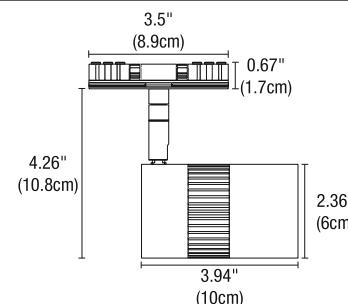

System

Type

Fixture

Beam Spread

Color Temperature

Finish

T24M

2C

RADL

FL

30K

WH

T24M Track Head 24V Magnetic Connector

2C 2 Circuit

RADL Radiant Large

NS Narrow Spot 10°

24K 2400K Very Warm White

SP Spot 20°

27K 2700K Incandescent White

NF Narrow Flood 35°

30K 3000K Warm White

FL Flood 45°

30D 3000D Warm Dim*

WF Wide Flood 60°

35K 3500K Neutral White

Warm Dim: NS (15°),

*Not available in NF

SP (25°)

SP (25°)

Warm Dim: NS (15°),

*Not available in NF

SP (25°)

SP (25°)


SP (25°)

BEAM ANGLE REFERENCE 45°

Color Temperature	24K	27K	30K	30D	35K
TOTAL LUMENS	1389	1161	1199	838	1422
WATTS	14	14	14	14	14
LUMENS PER WATT (lm/w)	99	83	86	58	102
CRI	97	92	93	97	98
TM-30 DATA	R9: 60 Rf: 93 Rg: 98	R9: 97 Rf: 92 Rg: 100	R9: 64 Rf: 91 Rg: 98	R9: 90 Rf: 95 Rg: 102	R9: 92 Rf: 94 Rg: 101

RADIANT MEDIUM

11 WATTS (WARM DIM: 8 WATTS)

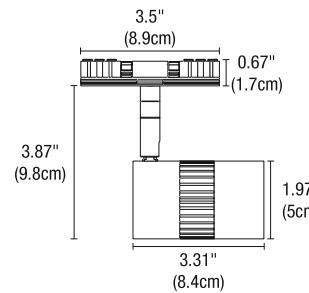

System

Type

Fixture

Beam Spread

Color Temperature

Finish

T24M

2C

RADM

FL

30K

WH

T24M Track Head 24V Magnetic Connector

2C 2 Circuit

RADM Radiant Medium

SP Spot 20°

24K 2400K Very Warm White

NF Narrow Flood 35°

27K 2700K Incandescent White

FL Flood 45°

30K 3000K Warm White

WF Wide Flood 60°

30D 3000D Warm Dim*

35K 3500K Neutral White

Color Temperature	24K	27K	30K	30D	35K
TOTAL LUMENS	765	639	660	360	783
WATTS	11	11	11	8	11
LUMENS PER WATT (lm/w)	70	58	64	47	76
CRI	97	92	93	93	98
TM-30 DATA	R9: 97 Rf: 92 Rg: 100	R9: 64 Rf: 91 Rg: 98	R9: 90 Rf: 95 Rg: 102	R9: 92 Rf: 94 Rg: 101	R9: 92 Rf: 94 Rg: 101

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC



24VDC WITH INTEGRATED LED

MATERIAL	Extruded Aluminum	FREQUENCY	50/60Hz	APPLICATION	Suitable for dry locations. Indoor use only.	COMPLIANCE LABEL	ETL to UL 2108 Standard
INPUT VOLTAGE	24VDC	POWER FACTOR	> 0.90	DIMMING & FLICKER	0-10V dimming Flicker less than 2%	LED LAMP LIFE	60,000 Hours

All track heads with the exception of Tubo Wall Wash and Zoom are JA8 listed with universal power supplies in 27K> CCT. Click the link to access our full Title 24 compliance listings: pureedge.com/resources.

TUBO SMALL NARROW SPOT (NS) 30D WARM DIM WITH SNOOT DETAIL

SNOOT IS INCLUDED IN NS 30D ORDERING CODE & REQUIRED FOR USE



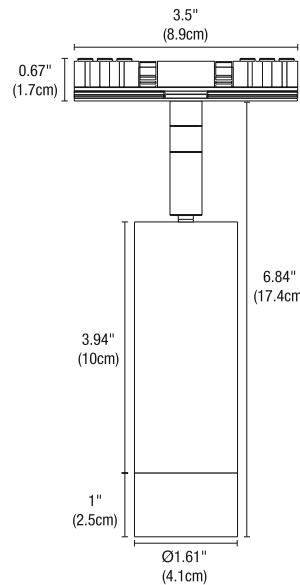
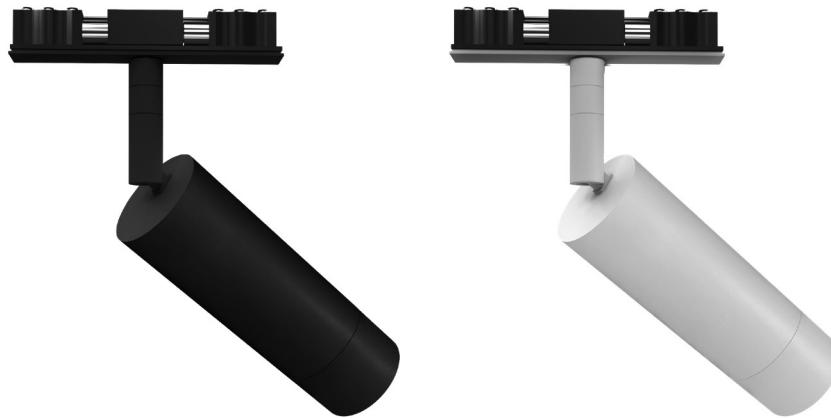


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

Additional Lenses and Accessories

TUBO LARGE LENS			SNOOT		LOUVER	FOCUS LENS	LINEAR SPREAD FILM
							
ORDERING CODE	STATIC WHITE LEN-TUBL-NS-SW LEN-TUBL-SP-SW LEN-TUBL-NF-SW LEN-TUBL-FL-SW LEN-TUBL-WF-SW	WARM DIM LEN-TUBL-SP-WD LEN-TUBL-NF-WD LEN-TUBL-FL-WD LEN-TUBL-WF-WD	STB16-BK STB16-WH (WHITE SHELL)	ST16-BK ST16-WH	L016-H	LF-TUBL-SF (SOFT FOCUS), MF (MEDIUM FOCUS), WF (WIDE FOCUS)	LF-TUBL-LS
LENS SIZE	2" (50mm) Diameter						
BEAM SPREADS	NS (10°), SP (20°), NF (35°), FL (45°), WF (60°)			Conical snoot creates a 7° Beam spread and is designed to reduce spill and control glare. Spun aluminum.	Snoot is designed to reduce spill and control glare. Spun aluminum.	Hexcell louver eliminates glare. 0.125" Thickness.	Soft focus lens is included with every track head. Diffuses the beam, providing uniform illumination.
TUBO SMALL LENS			SNOOT		LOUVER	FOCUS LENS	LINEAR SPREAD FILM
							
ORDERING CODE	STATIC WHITE LEN-TUBS-NS-SW LEN-TUBS-SP-SW LEN-TUBS-NF-SW LEN-TUBS-FL-SW LEN-TUBS-WF-SW	WARM DIM LEN-TUBS-NS-WD LEN-TUBS-SP-WD LEN-TUBS-NF-WD LEN-TUBS-FL-WD LEN-TUBS-WF-WD	TUBS-ST-BK TUBS-ST-WH (WHITE SHELL)		L011-H	LF-TUBS-SF (SOFT FOCUS), MF (MEDIUM FOCUS), WF (WHITE FOCUS)	LF-TUBS-LS
LENS SIZE	1.37" (35mm) Diameter						
BEAM SPREADS	NS (15°), SP (25°), NF (35°), FL (45°), WF (60°)			Conical snoot creates a 7° Beam spread and is designed to reduce spill and control glare. Spun aluminum.	Hexcell louver eliminates glare. 0.125" Thickness.	Soft focus lens is included with every track head. Diffuses the beam, providing uniform illumination.	Linear spread film: directs the light into an elongated beam. Typical applications using 10°, 15°, 25° include illuminating landscape oriented art. 35°, 40°, 60° create an elongated oval typically used for wall washing.
RADIANT LARGE LENS			SNOOT		LOUVER	FOCUS LENS	LINEAR SPREAD FILM
							
ORDERING CODE	STATIC WHITE LEN-RADL-NS-SW LEN-RADL-SP-SW LEN-RADL-NF-SW LEN-RADL-FL-SW LEN-RADL-WF-SW	WARM DIM LEN-RADL-NS-WD LEN-RADL-SP-WD LEN-RADL-NF-WD LEN-RADL-FL-WD LEN-RADL-WF-WD	STB16-BK STB16-WH (WHITE SHELL)		L016-H	LF-RADL-SF (SOFT FOCUS), MF (MEDIUM FOCUS), WF (WIDE FOCUS)	LF-RADL-LS
LENS SIZE	2" (50mm) Diameter						
BEAM SPREADS	NS (10°), SP (20°), NF (35°), FL (45°), WF (60°)	NS (15°), SP (25°), FL (45°), WF (60°)	Conical snoot creates a 7° Beam spread and is designed to reduce spill and control glare. Spun aluminum.	Hexcell louver eliminates glare. 0.125" Thickness.	Soft focus lens is included with every track head. Diffuses the beam, providing uniform illumination.	Linear spread film: directs the light into an elongated beam. Typical applications using 10°, 15°, 25° include illuminating landscape oriented art. 35°, 40°, 60° create an elongated oval typically used for wall washing.	
RADIANT MEDIUM LENS			LOUVER		FOCUS LENS	LINEAR SPREAD FILM	
							
ORDERING CODE	STATIC WHITE LEN-RADM-SP-SW LEN-RADM-NF-SW LEN-RADM-FL-SW LEN-RADM-WF-SW	WARM DIM LEN-RADM-SP-WD LEN-RADM-NF-WD LEN-RADM-FL-WD LEN-RADM-WF-WD	L011-H		LF-RADM-SF (SOFT FOCUS) MF (MEDIUM FOCUS), WF (WIDE FOCUS)		LF-RADM-LS
LENS SIZE	1.37" (35mm) Diameter						
BEAM SPREADS	SP (20°), NF (35°), FL (45°), WF (60°)			Hexcell louver eliminates glare. 0.125" Thickness.	Soft focus lens is included with every track head. Diffuses the beam, providing uniform illumination.	Linear spread film: directs the light into an elongated beam. Typical applications using 10°, 15°, 25° include illuminating landscape oriented art. 35°, 40°, 60° create an elongated oval typically used for wall washing.	

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

TUBO LARGE RGBTW SMART TRACKHEAD Photometric Data at 3000K

D - Distance from TUBO LARGE fixture
FC - Initial foot candles at the center of beam
DIA - Diameter

12 Watt

SPOT BEAM ANGLE 16°

D'	FC	DIA.
1'	3680	3.5
2'	920	7.0
3'	409	10.5
4'	230	14.0
5'	147	17.5
6'	102	21.0
7'	75	24.5
8'	58	28.0



NARROW FLOOD BEAM ANGLE 30°

D'	FC	DIA.
1'	912	6
2'	228	13
3'	101	19
4'	57	26
5'	36	32
6'	25	39
7'	19	45
8'	14	52




FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	1024	7.5
2'	256	15.0
3'	114	22.5
4'	64	30.0
5'	41	37.5
6'	28	45.0
7'	21	52.5
8'	16	60.0



WIDE FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	432	9.7
2'	108	19.4
3'	48	29.2
4'	27	38.9
5'	17	48.7
6'	12	58.4
7'	9	68.1
8'	7	77.9

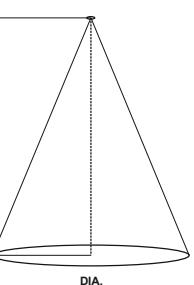

17 Watt

SPOT BEAM ANGLE 16°

D'	FC	DIA.
1'	5257	3.5
2'	1314	7.0
3'	584	10.5
4'	329	14.0
5'	210	17.5
6'	146	21.0
7'	107	24.5
8'	82	28.0



NARROW FLOOD BEAM ANGLE 30°

D'	FC	DIA.
1'	1303	6
2'	326	13
3'	145	19
4'	81	26
5'	52	32
6'	36	39
7'	27	45
8'	20	52




FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	1463	7.5
2'	366	15.0
3'	163	22.5
4'	91	30.0
5'	59	37.5
6'	41	45.0
7'	30	52.5
8'	23	60.0



WIDE FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	617	9.7
2'	154	19.4
3'	69	29.2
4'	39	38.9
5'	25	48.7
6'	17	58.4
7'	13	68.1
8'	10	77.9

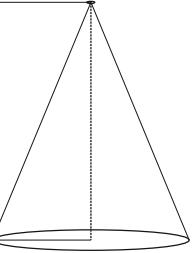


TUBO WALL WASH RGBTW SMART TRACKHEAD Photometric Data at 3000K

D - Distance from fixture


FC - Initial foot candles at the center of beam

DIA - Diameter


Tubo Wall Wash Foot Candle Chart

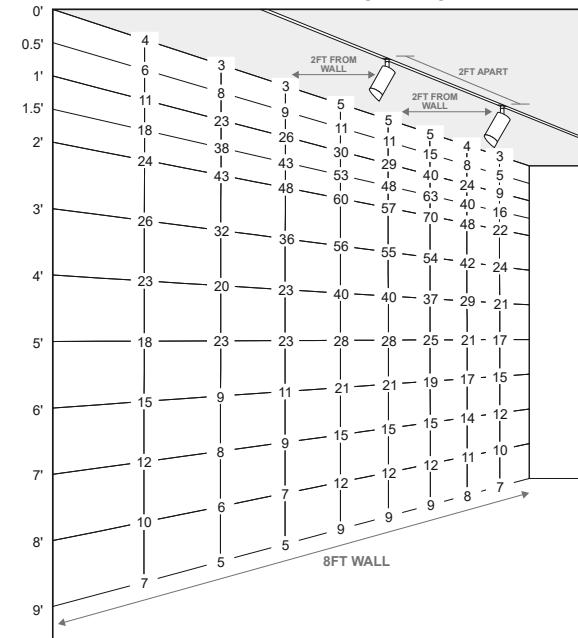

CANDLE POWER DISTRIBUTION

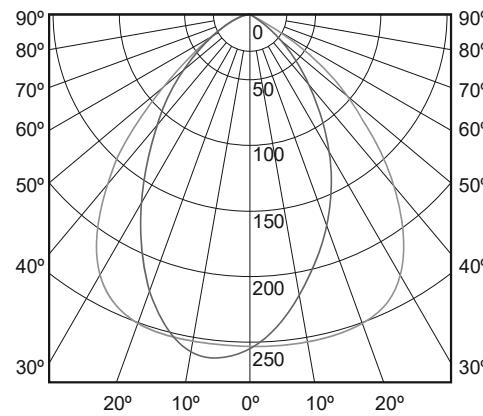

DIRECTION OF LIGHT

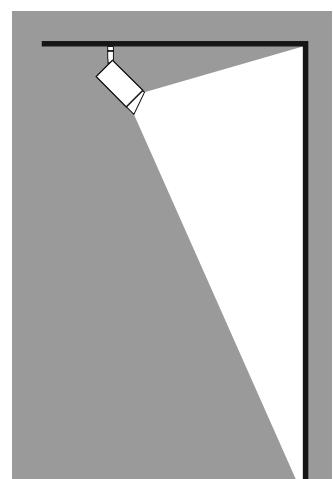

PROJECT	FIXTURE TYPE	DATE
www.PureEdgeLighting.com	Phone: 773.770.1195	1718 W. Fullerton Ave. Chicago, IL 60614

PureEdge Lighting reserves the right to modify this specification without prior notice

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

TUBO LARGE Photometric Data at 3000K

D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

NARROW SPOT BEAM ANGLE 10°

D'	FC	DIA.
1'	17300	2.2"
2'	4330	4.3"
3'	1930	6.5"
4'	1080	8.6"
5'	694	10.8"
6'	482	12"
7'	354	15"
8'	271	18"



SPOT BEAM ANGLE 20°

D'	FC	DIA.
1'	2582	4.3"
2'	1860	8.6"
3'	828	13"
4'	466	17.3"
5'	298	21.6"
6'	207	25.9"
7'	152	30.2"
8'	117	34.6"




NARROW FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	2780	7.6"
2'	695	15.1"
3'	309	22.7"
4'	174	30"
5'	111	37.2"
6'	77.2	45.4"
7'	56.7	53"
8'	43.4	62.5"




FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	1610	9.8"
2'	403	18"
3'	179	29.2"
4'	101	40"
5'	64.5	48"
6'	44.8	58.3"
7'	32.9	68"
8'	25.2	80"

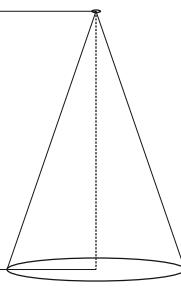

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	561	16.2"
2'	140	32.4"
3'	62.3	48"
4'	35	64.8"
5'	22.4	81"
6'	15.6	97.2"
7'	11.4	113.4"
8'	8.8	129.6"

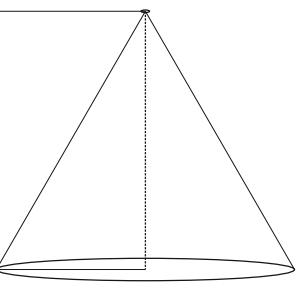

TUBO SMALL Photometric Data at 3000K


D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

NARROW SPOT BEAM ANGLE 15°

D'	FC	DIA.
1'	3890	3.2"
2'	972	6.4"
3'	432	9.7"
4'	243	12.9"
5'	156	16.2"
6'	108	19.4"
7'	79	22.6"
8'	61	25.9"



SPOT BEAM ANGLE 25°

D'	FC	DIA.
1'	2080	5.4"
2'	520	10.8"
3'	231	16.2"
4'	130	21.6"
5'	83	27"
6'	57.8	32.4"
7'	42.4	37.8"
8'	32.5	43.2"




NARROW FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	1540	7.5"
2'	385	15.1"
3'	171	22.6"
4'	96.3	30"
5'	61.6	37.2"
6'	42.8	45.3"
7'	31.4	53"
8'	24.1	62.5"




FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	496	9.7"
2'	124	19.4"
3'	55.1	29.1"
4'	31	38.8"
5'	19.8	46.6"
6'	13.8	58.3"
7'	10.1	68.0"
8'	7.75	77.7"

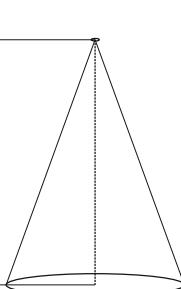

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	265	16.2"
2'	66.3	32.4"
3'	29.4	48"
4'	16.6	64.8"
5'	10.6	81"
6'	7.3	97.2"
7'	5.4	113.4"
8'	4.1	129.6"

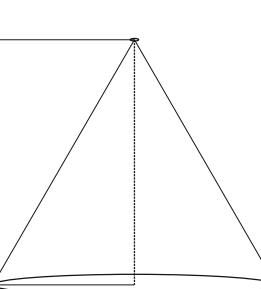

PROJECT

Fixture Type

DATE

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

TUBO LARGE DOWNLIGHT Photometric Data at 3000K


D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

NARROW SPOT BEAM ANGLE 10°

D'	FC	DIA.
1'	17300	2.2"
2'	4330	4.3"
3'	1930	6.5"
4'	1080	8.6"
5'	694	10.8"
6'	482	12"
7'	354	15"
8'	271	18"



SPOT BEAM ANGLE 20°

D'	FC	DIA.
1'	2582	4.3"
2'	1860	8.6"
3'	828	13"
4'	466	17.3"
5'	298	21.6"
6'	207	25.9"
7'	152	30.2"
8'	117	34.6"




NARROW FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	2780	7.6"
2'	695	15.1"
3'	309	22.7"
4'	174	30"
5'	111	37.2"
6'	77.2	45.4"
7'	56.7	53"
8'	43.4	62.5"




FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	1610	9.8"
2'	403	18"
3'	179	29.2"
4'	101	40"
5'	64.5	48"
6'	44.8	58.3"
7'	32.9	68"
8'	25.2	80"

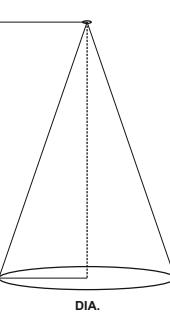

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	561	16.2"
2'	140	32.4"
3'	62.3	48"
4'	35	64.8"
5'	22.4	81"
6'	15.6	97.2"
7'	11.4	113.4"
8'	8.8	129.6"

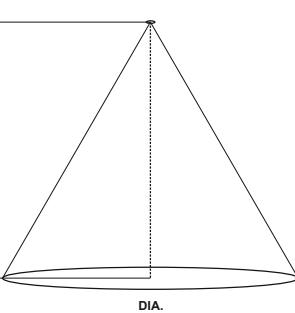

TUBO SMALL DOWNLIGHT Photometric Data at 3000K


D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

NARROW SPOT BEAM ANGLE 10°

D'	FC	DIA.
1'	17300	2.2"
2'	4330	4.3"
3'	1930	6.5"
4'	1080	8.6"
5'	694	10.8"
6'	482	12"
7'	354	15"
8'	271	18"




SPOT BEAM ANGLE 20°

D'	FC	DIA.
1'	2582	4.3"
2'	1860	8.6"
3'	828	13"
4'	466	17.3"
5'	298	21.6"
6'	207	25.9"
7'	152	30.2"
8'	117	34.6"




NARROW FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	2780	7.6"
2'	695	15.1"
3'	309	22.7"
4'	174	30"
5'	111	37.2"
6'	77.2	45.4"
7'	56.7	53"
8'	43.4	62.5"

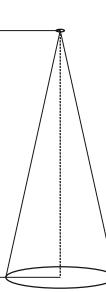


FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	1610	9.8"
2'	403	18"
3'	179	29.2"
4'	101	40"
5'	64.5	48"
6'	44.8	58.3"
7'	32.9	68"
8'	25.2	80"

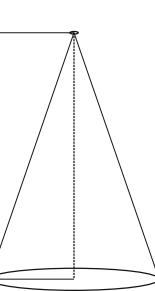

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	561	16.2"
2'	140	32.4"
3'	62.3	48"
4'	35	64.8"
5'	22.4	81"
6'	15.6	97.2"
7'	11.4	113.4"
8'	8.8	129.6"

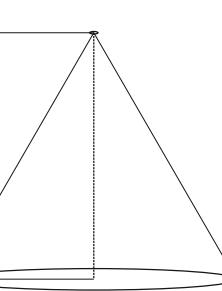

PROJECT

Fixture Type

DATE

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

ZOOM Z1 Photometric Data at 3000K



D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

15° BEAM ANGLE		
D'	FC	DIA.
1'	7870	3"
2'	1970	5"
3'	875	8"
4'	492	10"
5'	315	12"
6'	219	16"
7'	161	18"
8'	132	21"

55° BEAM ANGLE		
D'	FC	DIA.
1'	992	10.8"
2'	248	21.6"
3'	110	32.4"
4'	62	43.2"
5'	40	54"
6'	28	75.6"
7'	20	86.4"
8'	16	97.2"

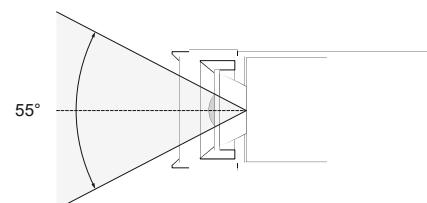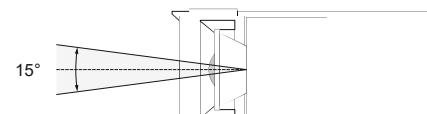

Z1: Adjustable between 15° and 55°

ZOOM Z2 Photometric Data at 3000K



D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

20° BEAM ANGLE		
D'	FC	DIA.
1'	3950	6"
2'	988	10"
3'	439	16"
4'	247	20"
5'	158	24"
6'	110	32"
7'	80.7	36"
8'	61.8	42"

50° BEAM ANGLE		
D'	FC	DIA.
1'	1220	10.8"
2'	304	21.6"
3'	135	32.4"
4'	76	43.2"
5'	48.6	54"
6'	33.8	75.6"
7'	25	86.4"
8'	19	97.2"

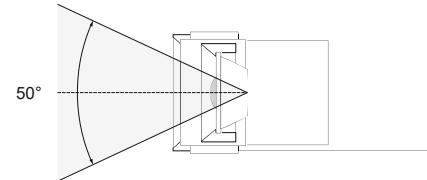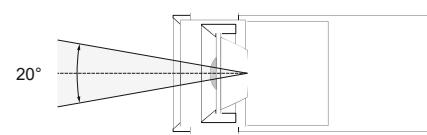




Z2: Adjustable between 20° and 50°

TUBO WALL WASH Photometric Data at 3000K

D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

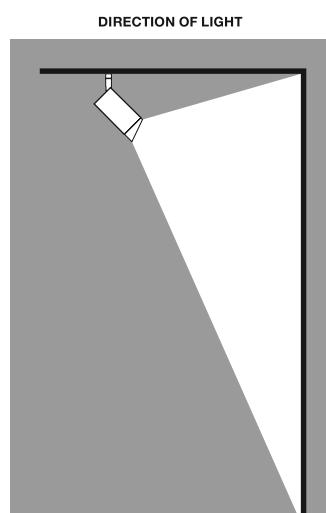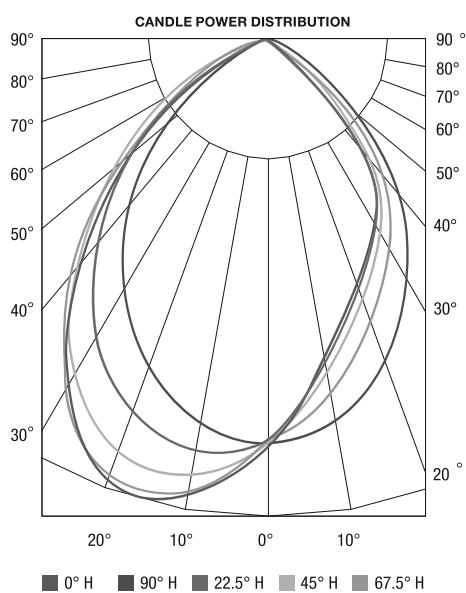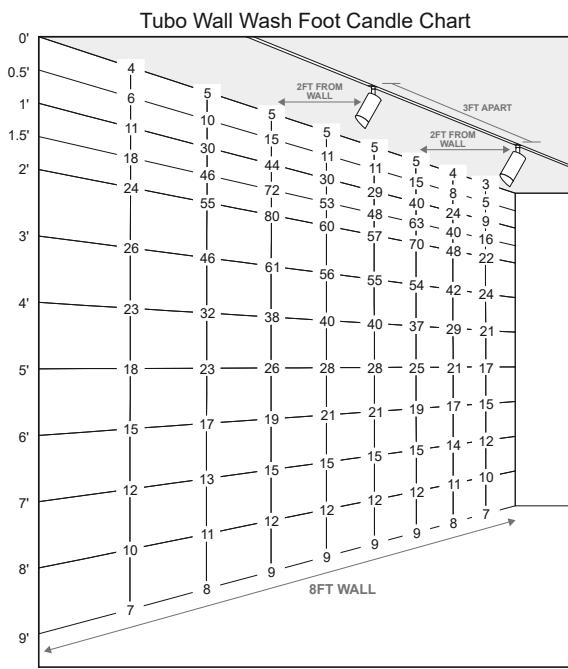

PROJECT	FIXTURE TYPE	DATE
www.PureEdgeLighting.com	Phone: 773.770.1195 1718 W. Fullerton Ave. Chicago, IL 60614	PureEdge Lighting reserves the right to modify this specification without prior notice

T24M TRACK HEADS, 2 CIRCUIT MAGNETIC

24VDC WITH INTEGRATED LED

RADIANT LARGE Photometric Data at 3000K


D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter


NARROW SPOT BEAM ANGLE 10°

D'	FC	DIA.
1'	17300	2.2"
2'	4330	4.3"
3'	1930	6.5"
4'	1080	8.6"
5'	694	10.8"
6'	482	12"
7'	354	15"
8'	271	18"




SPOT BEAM ANGLE 20°

D'	FC	DIA.
1'	2582	4.3"
2'	1860	8.6"
3'	828	13"
4'	466	17.3"
5'	298	21.6"
6'	207	25.9"
7'	152	30.2"
8'	117	34.6"



NARROW FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	2780	7.6"
2'	695	15.1"
3'	309	22.7"
4'	174	30"
5'	111	37.2"
6'	77.2	45.4"
7'	56.7	53"
8'	43.4	62.5"

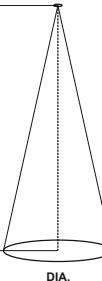

FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	1610	9.8"
2'	403	18"
3'	179	29.2"
4'	101	40"
5'	64.5	48"
6'	44.8	58.3"
7'	32.9	68"
8'	25.2	80"

DIA.

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	561	16.2"
2'	140	32.4"
3'	62.3	48"
4'	35	64.8"
5'	22.4	81"
6'	15.6	97.2"
7'	11.4	113.4"
8'	8.8	129.6"

DIA.

RADIANT MEDIUM Photometric Data at 3000K

D - Distance from fixture

FC - Initial foot candles at the center of beam

DIA - Diameter

SPOT BEAM ANGLE 20°

D'	FC	DIA.
1'	6100	3.2"
2'	1520	6.5"
3'	678	9.7"
4'	381	13"
5'	244	16.2"
6'	169	19.4"
7'	124	22.8"
8'	95.3	25.9"

DIA.

NARROW FLOOD BEAM ANGLE 35°

D'	FC	DIA.
1'	1540	7.6"
2'	385	15.1"
3'	171	22.7"
4'	96.3	30"
5'	61.6	37.2"
6'	42.8	45.4"
7'	31.4	53"
8'	24.1	62.5"

DIA.

FLOOD BEAM ANGLE 45°

D'	FC	DIA.
1'	496	9.7"
2'	124	19.4"
3'	55.1	29.2"
4'	131	38.9"
5'	19.8	48.6"
6'	13.8	58.3"
7'	10.1	68"
8'	7.8	77.8"

DIA.

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	265	16.2"
2'	66.3	32.4"
3'	29.4	48"
4'	16.6	64.8"
5'	10.6	81"
6'	7.3	97.2"
7'	5.4	113.4"
8'	4.1	129.6"


DIA.

PROJECT	FIXTURE TYPE	DATE


UNIVERSAL POWER SUPPLIES WITH TRIM

24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS


ELV WIRING DIAGRAM

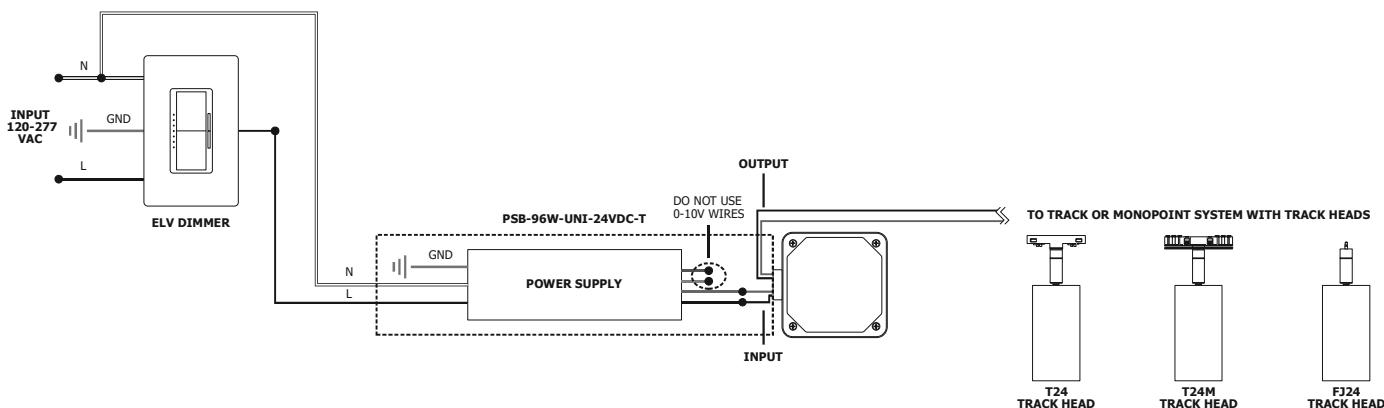

0-10V WIRING DIAGRAM

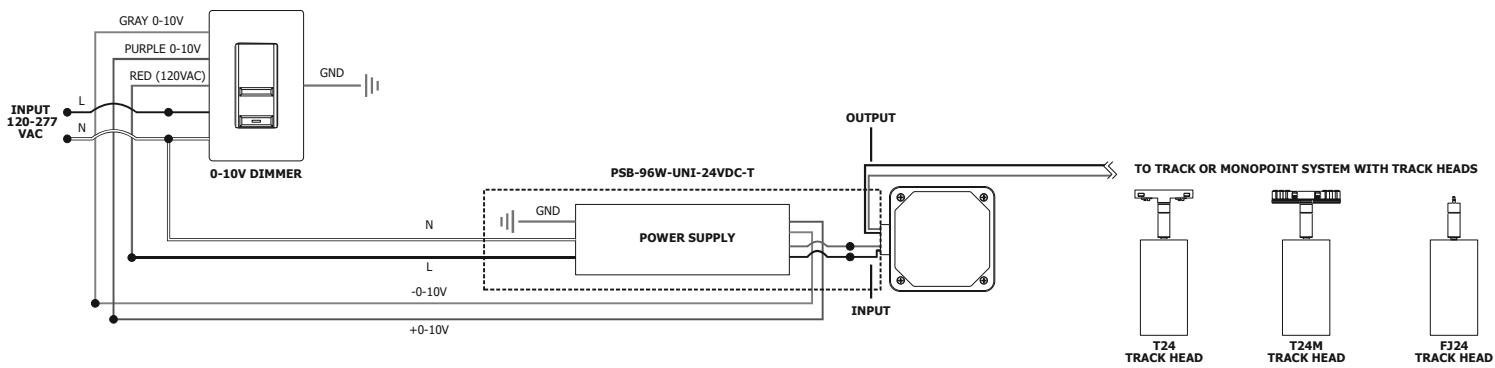

SMART WIRING DIAGRAM & NETWORK TOPOGRAPHY

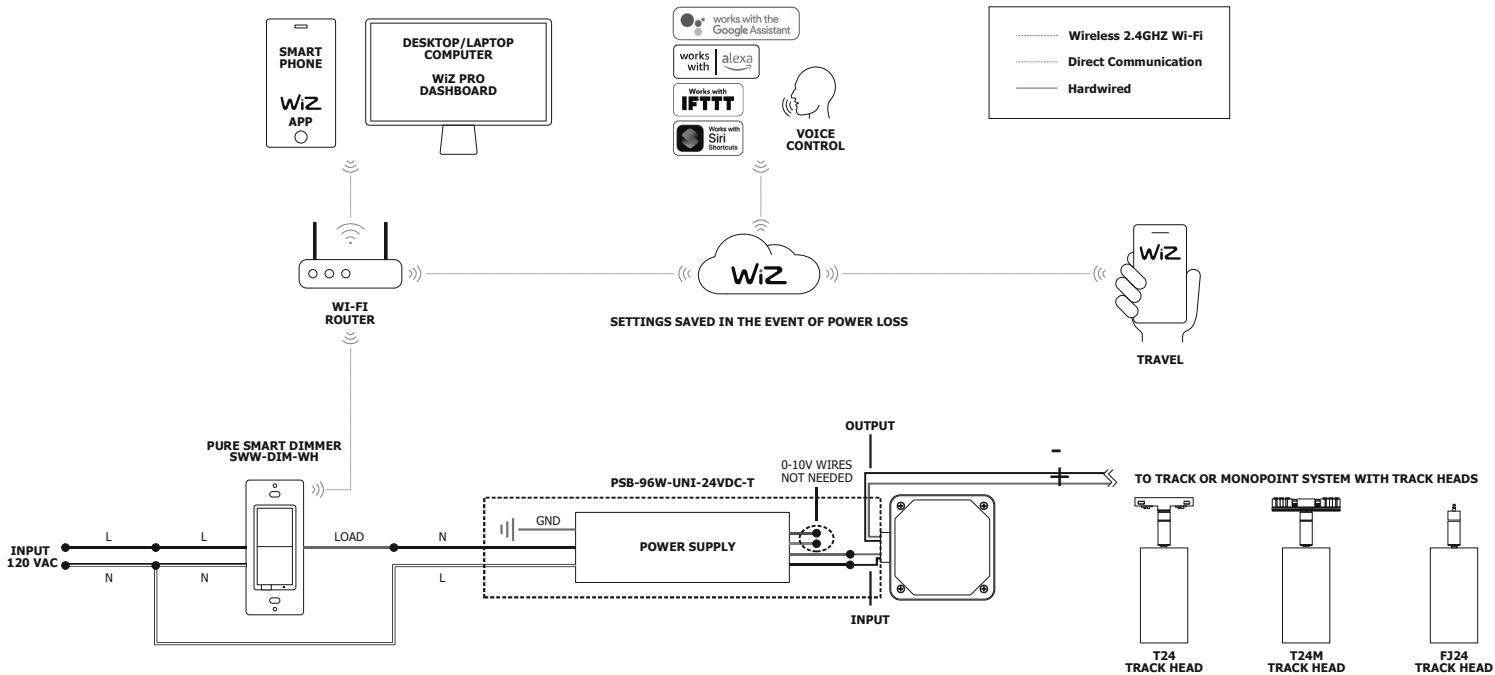

PROJECT	Fixture Type	DATE
---------	--------------	------


TM30 DATA

24VDC WITH INTEGRATED LED

TM-30-15 DATA: Consistent color temperatures among multiple track heads is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic

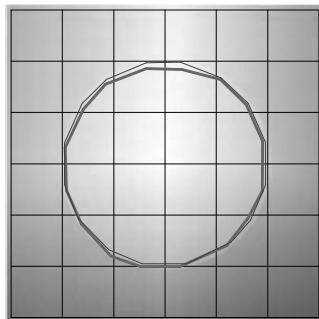


■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic

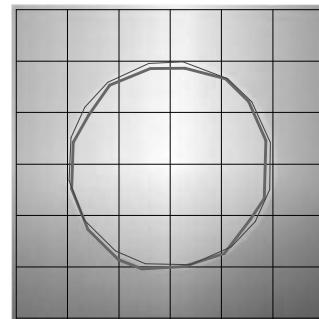


■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic

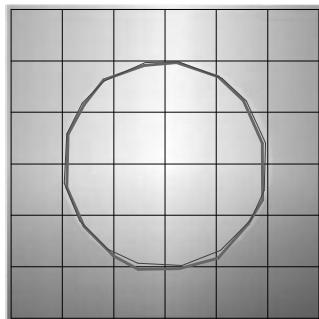


■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic

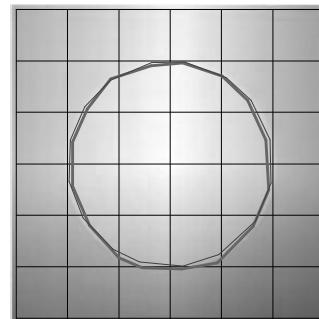


■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic

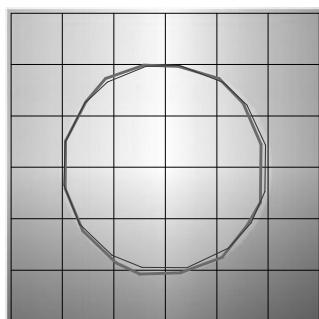

■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT

Fixture Type

DATE